

MEXIM

ADHESIVE TAPES PVT. LTD.

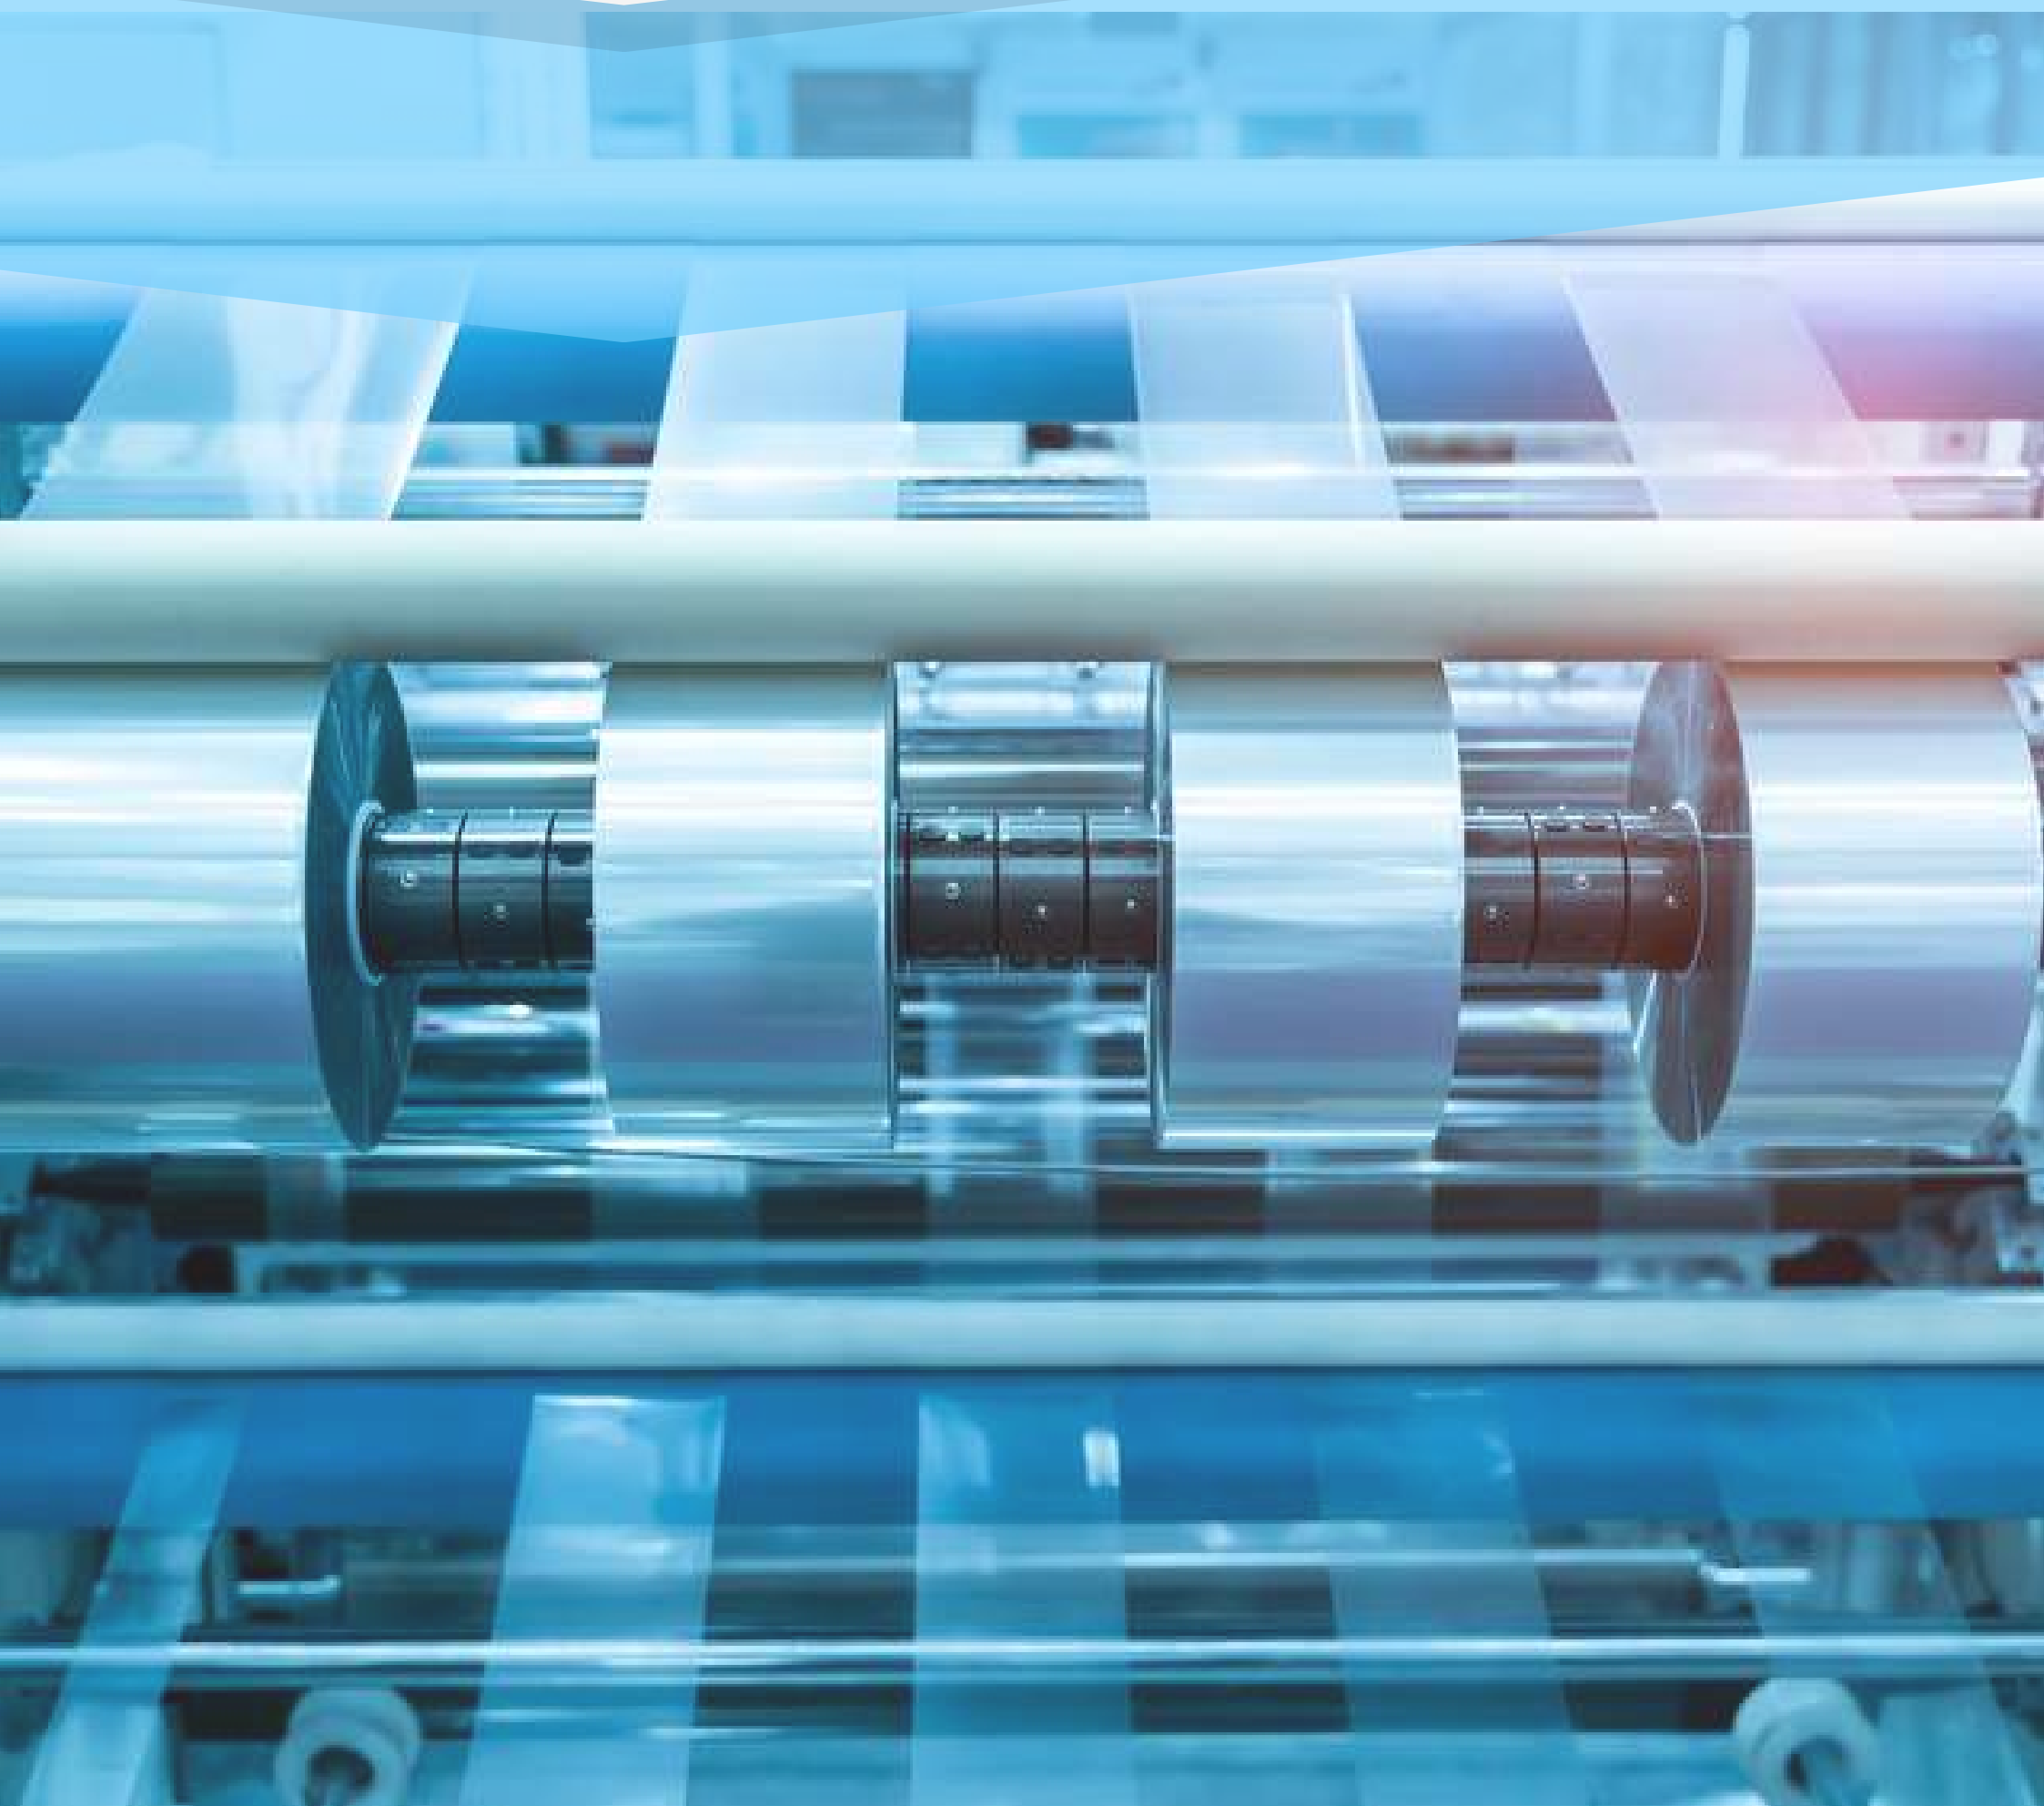





TABLE OF CONTENTS

I. INTRODUCTION

<u>About Us</u>	6
<u>Infrastructure</u>	7
<u>Milestones</u>	8

II. BOPP TAPES

<u>Packaging Tape</u>	11
<u>Printed BOPP Tape</u>	13
<u>Easy Tear Tape</u>	14
<u>Low Noise Tape</u>	15
<u>No Noise Tape</u>	16
<u>Machine Roll</u>	17
<u>High Shear Tape</u>	18
<u>Packaging Tape Hot Melt</u>	19
<u>Invisible Tape</u>	20
<u>Metallized BOPP Tape</u>	21
<u>Water Resistant Tape</u>	22
<u>BOPP Freezer Tape</u>	23
<u>Double Sided BOPP Tape</u>	24
<u>Shelf Strip Tape</u>	25
<u>Non Adhesive Tape</u>	26
<u>Holographic Tape</u>	27
<u>BOPP Neck Sealing Tape</u>	28
<u>Cold Lamination Film</u>	29

TABLE OF CONTENTS

<u>III. TISSUE TAPES</u>	30
<u>DS Tissue Tape Hot Melt</u>	31
<u>DS Tissue Tape Solvent Based</u>	32
<u>DS Tissue Tape Acrylic</u>	33
<u>IV. PAPER PACKAGING TAPES</u>	34
<u>Self Adhesive Kraft Paper Tape</u>	35
<u>Water Activated Tape</u>	36
<u>Reinforced Water Activated Tape</u>	37
<u>V. MASKING TAPES</u>	38
<u>General Purpose Masking Tape K6143</u>	39
<u>Automotive Masking Tape P6030</u>	40
<u>General Purpose Masking Tape PXL6030</u>	41
<u>VI. FOAM TAPES</u>	42
<u>Gasket Tape</u>	43
<u>Eva Foam Insulation Tape</u>	44
<u>Double Sided Mounting Tape</u>	45
<u>VII. SURFACE PROTECTION TAPES</u>	46
<u>General Purpose Surface Protection Tape</u>	47
<u>Floor Guard Tape</u>	48
<u>Carpet Protection Tape</u>	49
<u>Aluminium Panel Protection Tape</u>	50
<u>Low Peel Protection Tape</u>	51
<u>Laminate Protection Tape</u>	52

TABLE OF CONTENTS

<u>VIII. REINFORCED TAPES</u>	53
<u>Duct Tape</u>	54
<u>Cross Filament Tape</u>	55
<u>Mono Filament Tape</u>	56
<u>Woven HDPE Fabric Tape</u>	57
<u>IX. POLYESTER TAPES</u>	58
<u>PET Holding Tape</u>	59
<u>Double Sided Polyester Tape</u>	60
<u>Recycled Plastic Tape</u>	61
<u>X. ALUMINIUM FOIL TAPE</u>	62
<u>Aluminium Foil Tape</u>	63
<u>XI. MARKING & WARNING TAPES</u>	64
<u>PVC Floor Marking Tape</u>	65
<u>Ultra Floor Marking Tape</u>	65
<u>Warning Tape</u>	67
<u>XII. ELECTRICAL INSULATION TAPES</u>	68
<u>inVOLT Plus PE Insulation Tape</u>	69
<u>MxWonder PE Insulation Tape</u>	70

TABLE OF CONTENTS

<u>XIII. SPECIAL APPLICATION TAPES</u>	71
<u>Air Ventilation Tape</u>	72
<u>Aluminium Flashband Bitumen Tape</u>	73
<u>Abhedya Bitumen Tape</u>	74
<u>Pipe Wrapping Tape</u>	75
<u>XIV. NEW PRODUCT LINE</u>	76
<u>Poly-coated Release Liners</u>	77
<u>XV. PROTECTIVE PACKAGING</u>	78
<u>Greenwrap Honeycomb Paper</u>	79
<u>Greenfill Void Filling Paper</u>	79
<u>Stretch Film</u>	79
<u>XVI. DISPENSERS</u>	80
<u>Mini Tape Desktop Dispenser</u>	81
<u>Handy Tape Dispenser</u>	81
<u>GreenWrap Dispenser</u>	81
<u>GreenFill Dispenser</u>	81
<u>Water Activated Tape Dispensers</u>	82

ABOUT US



2 FACTORIES COVERING **60,000 SQ. FT. PRODUCTION AREA**



HEAD OFFICE IN **MUMBAI**



INDIA'S ONLY TAPE FACTORY WITH A DEDICATED R&D FACILITY



STATE OF THE ART **PRINTING, COATING & PACKING EQUIPMENTS**



CAGR ≥ 20% SINCE 2005



QUALITY COMPLIANCE - **ISO 9001:2015**

ENVIRONMENTAL COMPLIANCE - **ISO 14001:2015**

SOCIAL COMPLIANCE - **SMETA 4 PILLAR**



MORE THAN **2000 DIRECT CUSTOMERS** IN INDIA








EXPORTS TO **MORE THAN 20 COUNTRIES** ACROSS **FOUR CONTINENTS**





INFRASTRUCTURE



5

BOPP COATING MACHINE

5

PRINTING MACHINE

1

SPF COATING MACHINE

1

HOT MELT COATING MACHINE

1

MULTI-PURPOSE COATING MACHINE

1

PVC COATING MACHINE






16

SLITTING MACHINES

4

SLICING MACHINES

MILESTONES



1987

▶ Established in 1987

1995

▶ Set up our first manufacturing unit of 8000 SQ. FT. in Daman with 120 MT/Month BOPP Tape Capacity

2000

▶ Moved to a new manufacturing unit of 14000 SQFT. Set up a new BOPP Coating Line and increased our BOPP Tape Capacity to 280 MT/Month

2008

▶ Added a third BOPP Coating Line, increasing our BOPP Tape capacity to 500 MT/Month

2009






▶ Expanded the same facility to 30000 sq. ft., to add a high-speed coating line and started the technical tapes division

2011

▶ Shifted from Furnace Oil to LPG gas-based burners, thus became more eco-friendly



MILESTONES



2013

Started with Protection Tape manufacturing with 150 MT/Month Capacity

2014

Installed a new gen multi-purpose coating line, with the facility to coat technical tapes

2017

Installed a new coating line for our first patented product, self-adhesive waterproofing tapes

2020

Installed a new hot melt coating line

2021


Added a second manufacturing unit in Dadra, further increasing our BOPP Tape capacity to 850 MT/Month

2022

Installed a new PVC Coating line for Insulation Tapes




BOPP TAPES

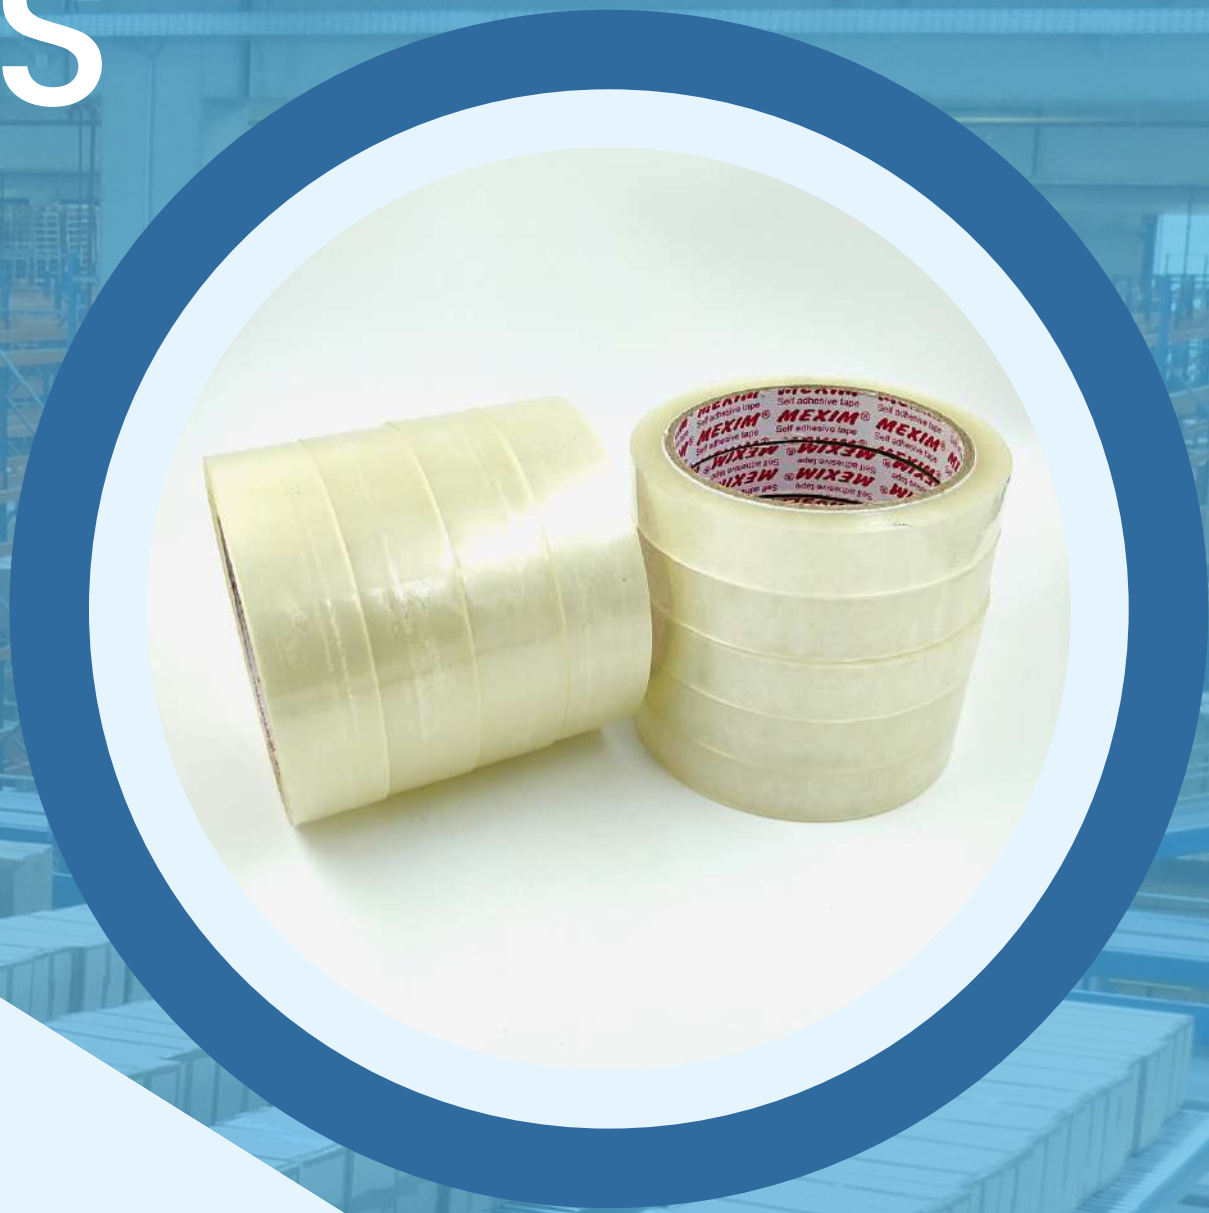

*Something for
Everyone....*

*The most widely used packaging and stationery
tapes*

*We offer a wide range of standard and customized
packaging tapes*




PACKAGING TAPE

Mexim's Packaging Tape is used from light to heavy duty sealing/packing of corrugated boxes for shipping and storing.

It combines extra tear resistance with ultra-strong adhesion for better endurance



STRUCTURE

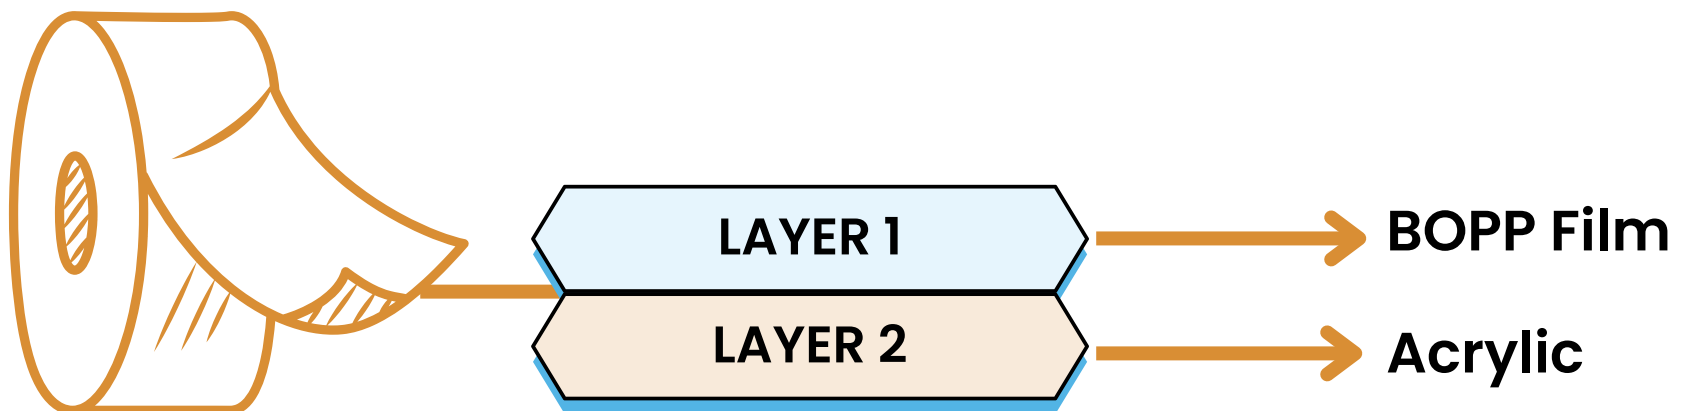

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23 μ	36 μ /1.44 mil	< 13 cm	> 600 mins	> 380 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23 μ	38 μ /1.52 mil	< 12 cm	> 1200 mins	> 420 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23 μ	40 μ /1.6 mil	< 12 cm	> 1500 mins	> 440 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23 μ	43 μ /1.72 mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23 μ	45 μ /1.8 mil	< 7.5 cm	> 2200 mins	> 560 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25 μ	45 μ /1.8 mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25 μ	48 μ /1.92 mil	< 7 cm	> 2500 mins	> 580 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29 μ	50 μ /2 mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29 μ	55 μ /2.2 mil	< 6.5 cm	> 3000 mins	> 600 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37 μ	65 μ /2.6 mil	< 6 cm	> 5000 mins	> 850 g/in	> 4.2 kg/cm

Colours	Slit Material	Jumbo Rolls	Small Jumbo Rolls
Transparent/Brown /White/Custom Colours	Width: 9 mm to 100 mm Length: 3 meters to 2000 meters	Width: 1025 mm to 1610 mm Length: 4000 - 8000 meters	Width: 144, 240 & 288 mm Length: 2000 meters

FEATURES

- Cost Effective
- Good Tensile Strength
- Long Shelf Life
- Ageing Resistant
- Strong OPP Film
- Easy to apply on variety of surfaces

APPLICATION



Bonding




Joining




Sealing



Heavy Duty
Packaging

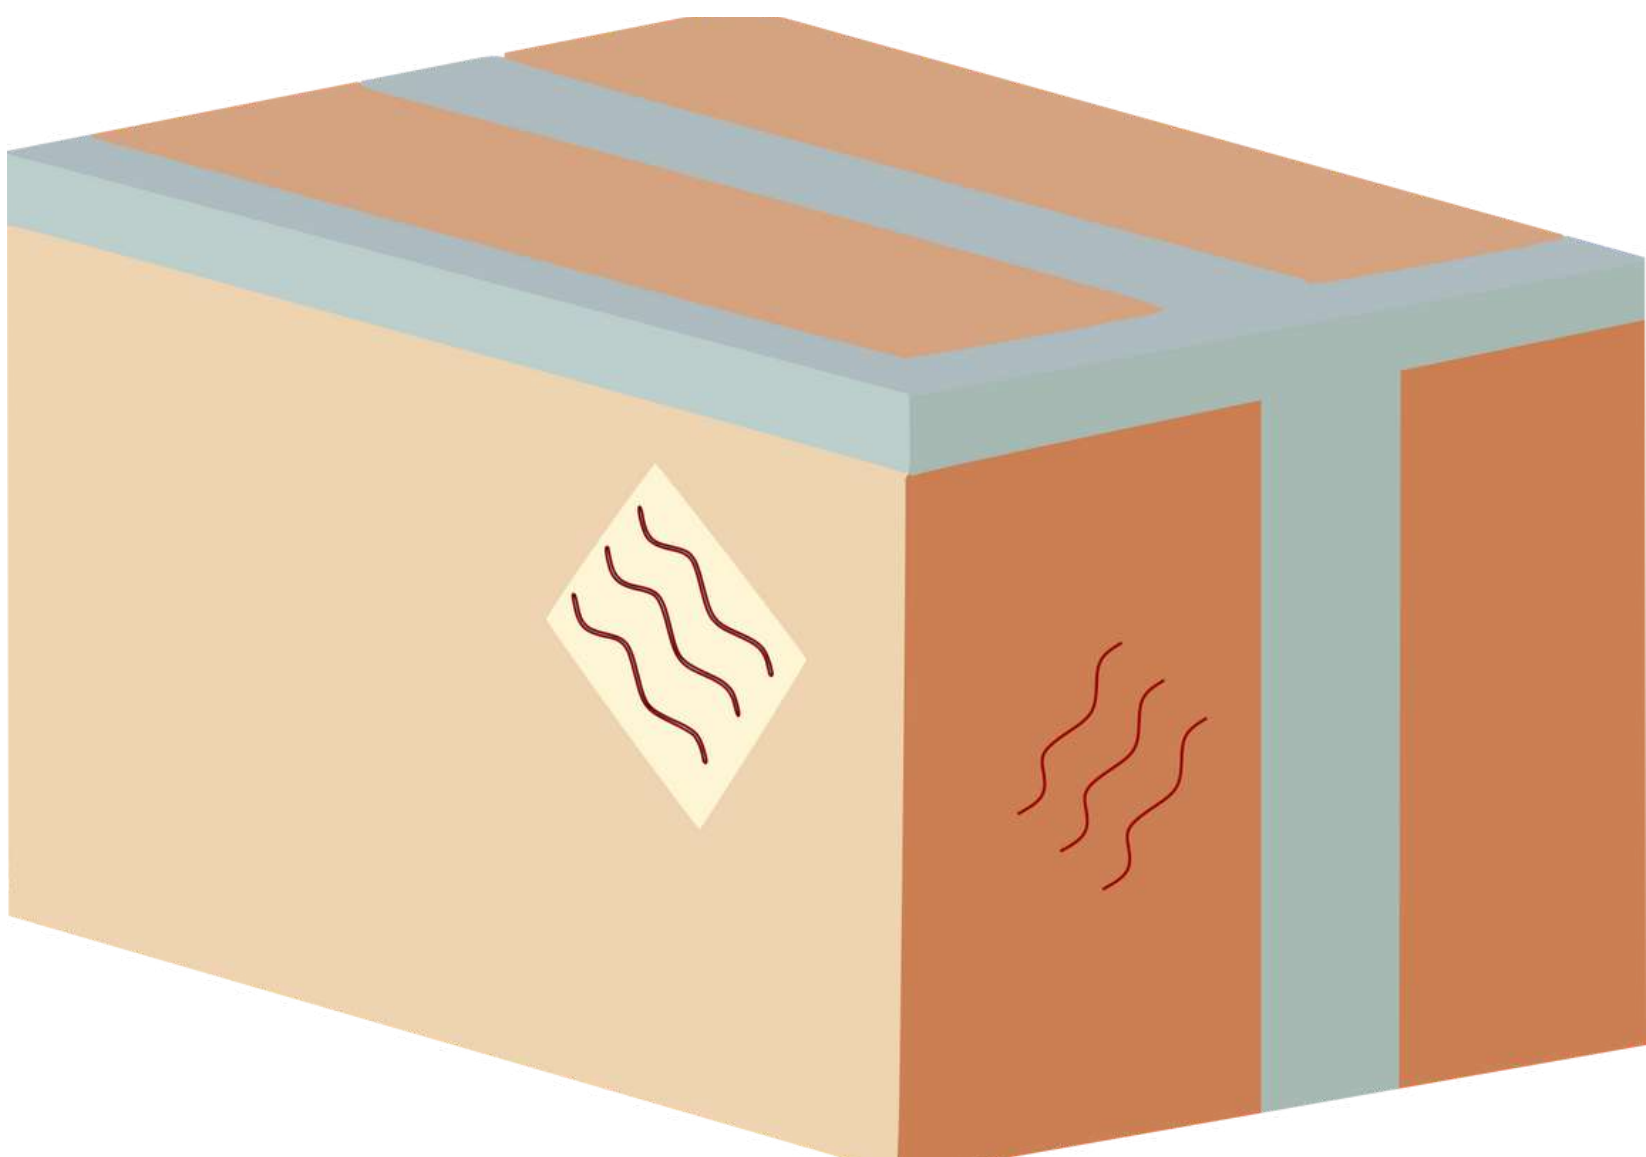




PRINTED BOPP TAPE

- Up to 6 colour sandwich printing
- Low MOQ's
- Sharp quality printing by Roto Gravure



STRUCTURE

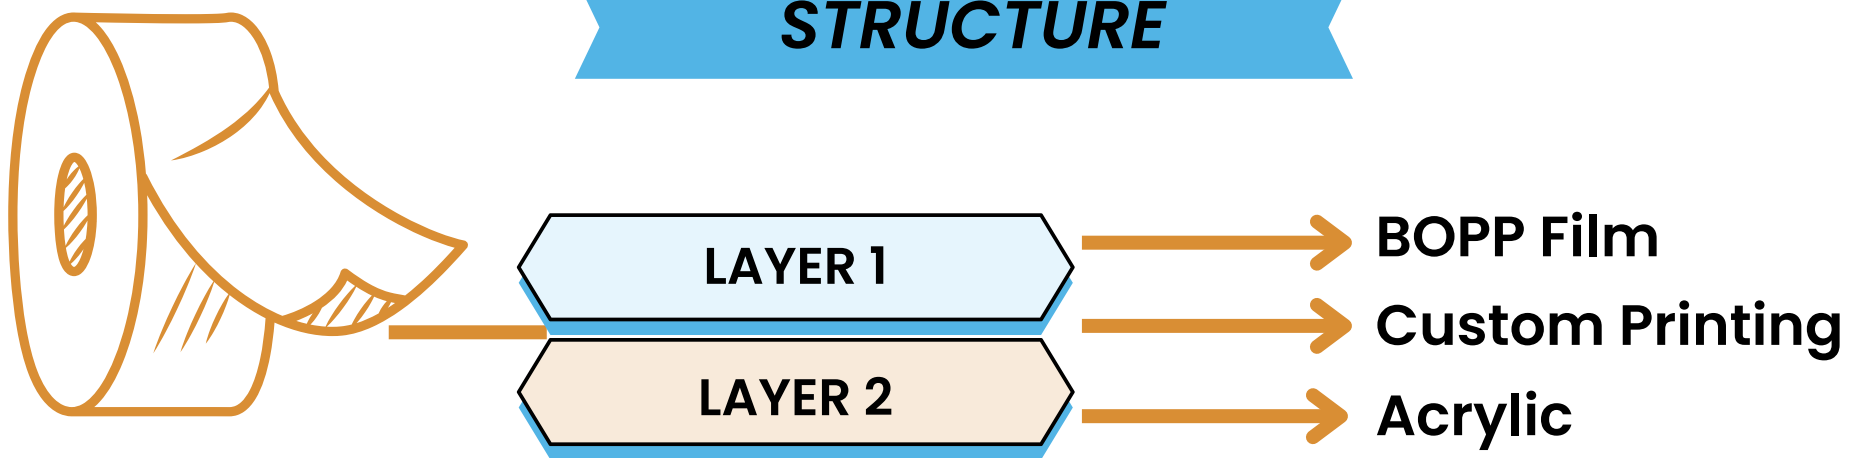

PERFORMANCE

***Performance parameters identical to Packaging Tapes, refer page no. 7**

Colours	Slit Material	Jumbo Rolls	Small Jumbo Rolls
Transparent & Custom Colours	Width: 18 mm to 96 mm Length: 20 meters to 2000 meters	Width: 740 mm to 1320 mm Length: 4000 meters	Width: 144, 240 & 288 mm Length: 1500 meters

FEATURES

- Cost Effective
- Long Shelf Life
- Good Tensile Strength for Long Term Application
- Ageing Resistant
- Strong OPP Film
- Easy to apply on variety of surfaces

APPLICATION



Bonding




Marketing



Security Uses



Heavy Duty Packaging




EASY TEAR TAPE

Easy Tear Tapes can be easily cut or torn by hand, without the use of scissors, blades, cutters, or tape dispensers



STRUCTURE

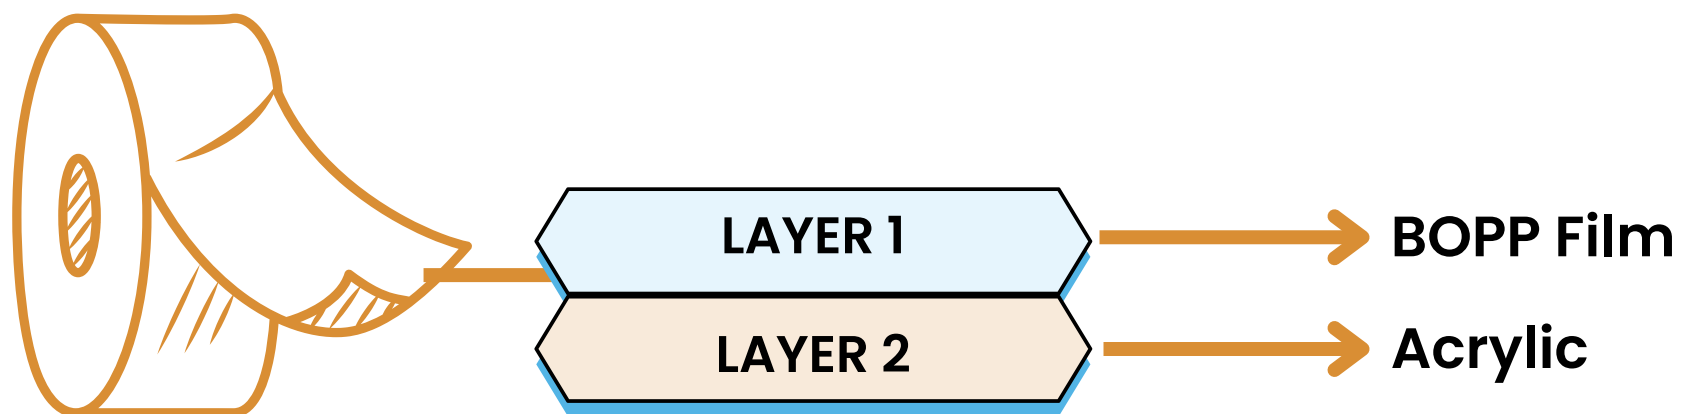

PERFORMANCE

***Performance parameters identical to Packaging Tapes, refer page no. 7**

Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 12 mm, 18 mm, 19 mm, 24 mm Length: 5 meters to 100 meters

FEATURES

- East To Tear by Hand
- Easy to Use and Apply
- Long Shelf Life


APPLICATION



Paper Mending



Smaller Packages




LOW NOISE TAPE

Low Noise Tapes are designed to open with a uniform force, with noise levels $\leq 85\text{dB}$ @ 4 meter

Used in packing environment complying with ambient decibel levels as per Occupational Health and Safety standards such as ISO 18001:2015



STRUCTURE

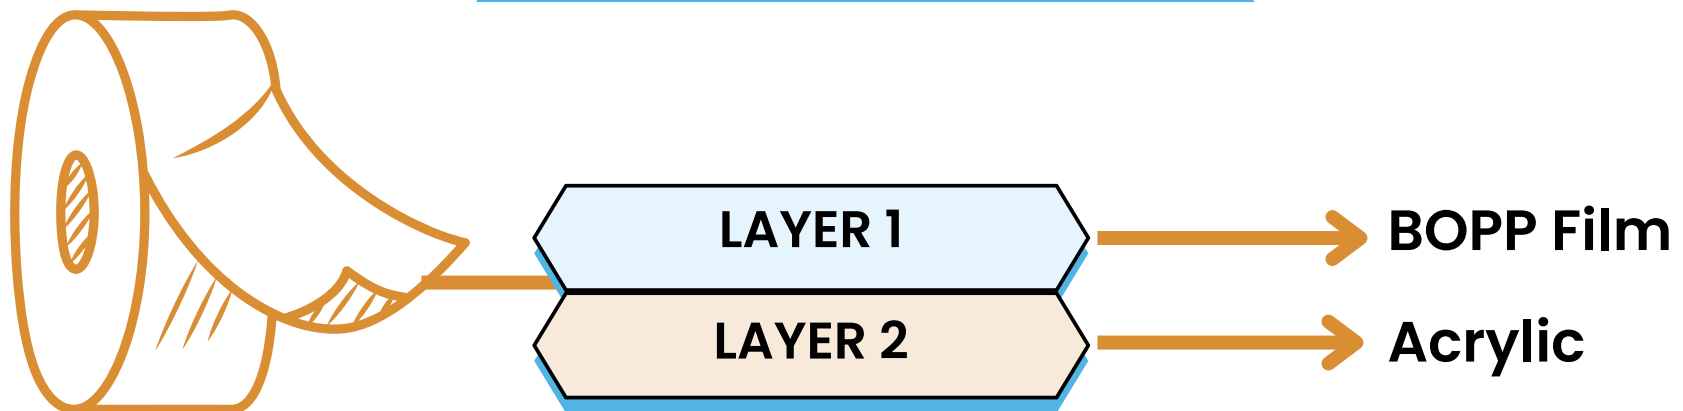

PERFORMANCE

***Performance parameters identical to Packaging Tapes, refer page no. 7**

Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 36 mm to 100 mm Length: 25 meters to 200 meters

FEATURES

- Low Unwinding Noise 
- Good Shelf Life
- Good Tensile Strength
- Ideal for multiple packing stations

APPLICATION



Bonding




Joining



Sealing



Heavy Duty Packaging




NO NOISE TAPE

No Noise Tapes are designed to open with a uniform force, with noise levels $\leq 65\text{dB}$ @ 4 meters

Used in packing environment complying with ambient decibel levels as per Occupational Health and Safety standards such as ISO 18001:2015



STRUCTURE

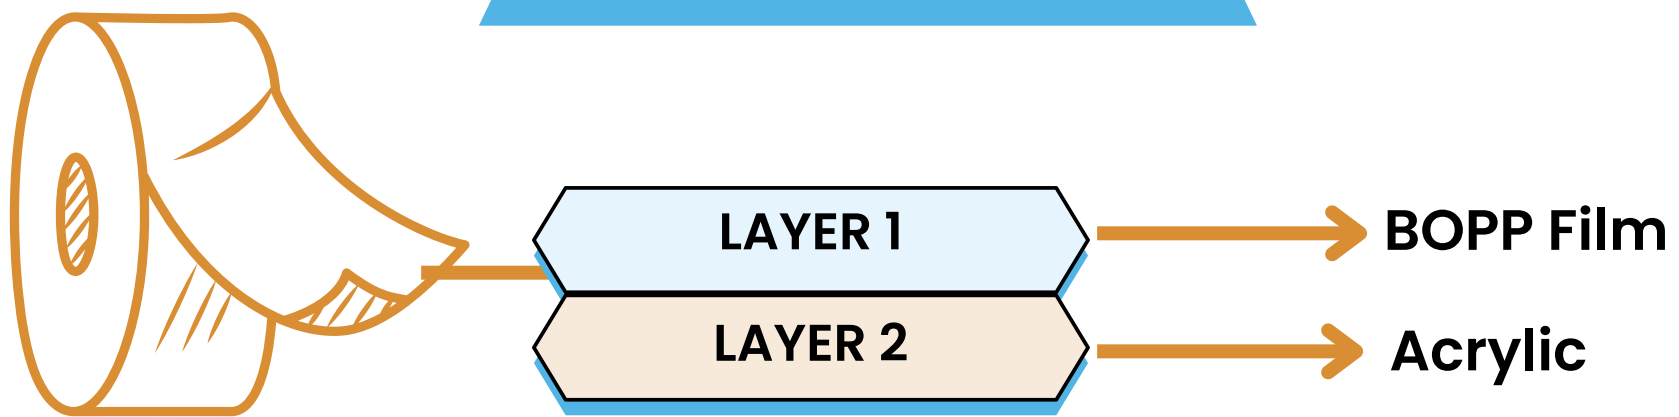

PERFORMANCE

***Performance parameters identical to Packaging Tapes, refer page no. 7**

Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 36 mm to 144 mm Length: 25 meters to 200 meters

FEATURES

- No Unwinding Noise 
- Easy Unwind
- Ideal for multiple packing stations
- Good Tensile Strength
- Very Long Shelf Life

APPLICATION



Bonding




Joining



Sealing



Heavy Duty Packaging



MACHINE ROLL


Specially designed for running on High Speed Auto Taping machines

Our Modified Acrylic adhesive Machine Tapes can be used as a substitute for traditional Hotmelt OPP Tapes

Machine Rolls can be customized for packaging, printed, high shear, & freeze grade



STRUCTURE

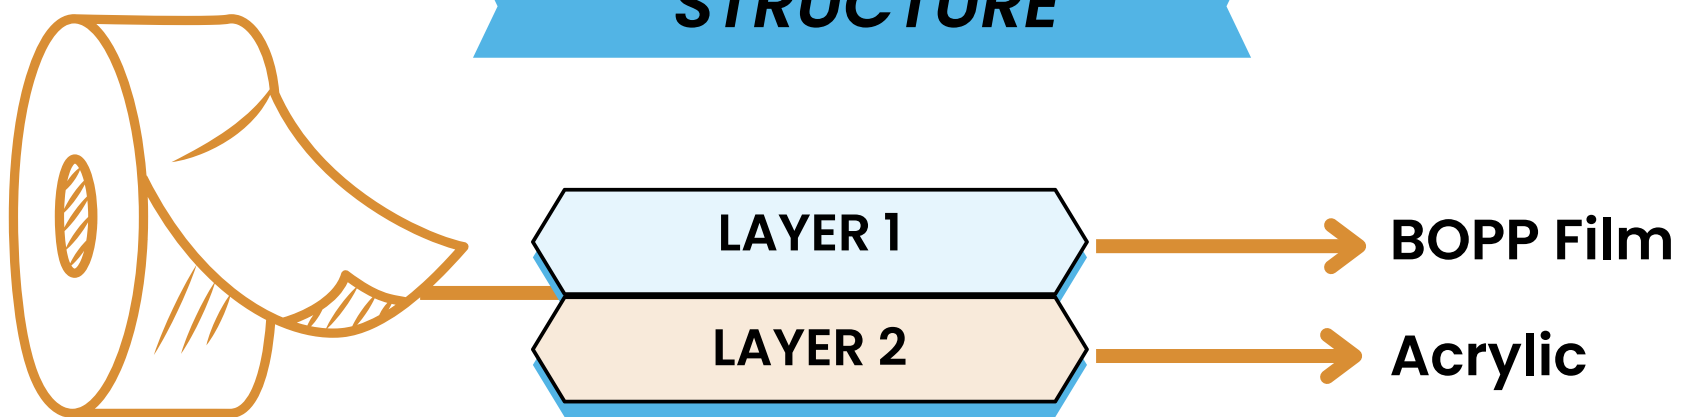

PERFORMANCE


***Performance parameters identical to Packaging Tapes, refer page no. 7**


Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 30 mm to 144 mm Length: 650 meters to 2000 meters

FEATURES

- Residue Free Operations
- High Speed Machine Operations
- High Tensile Strength
- Very Long Shelf Life

APPLICATION

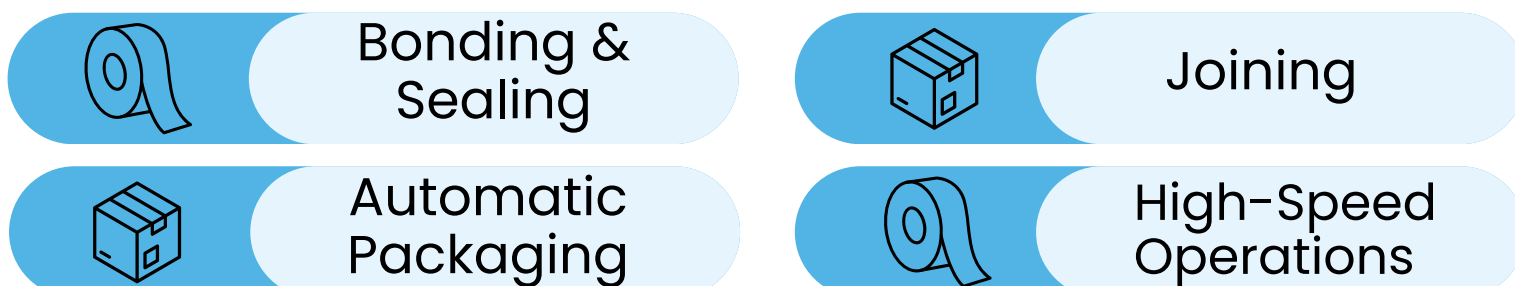




HIGH SHEAR TAPE

High Shear Tapes are used for packing Heavy duty or High strength kraft paper boxes



STRUCTURE

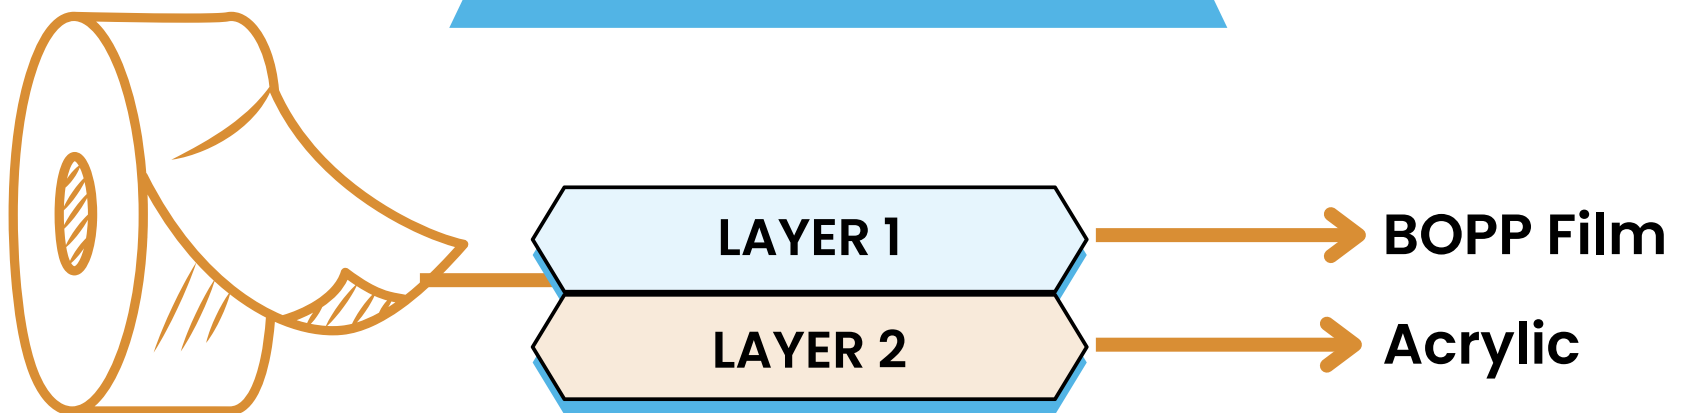

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2317	BOPP Film	23μ	40μ/1.6 mil	< 10 cm	> 3000 mins	> 400 g/in	> 3.2 kg/in
SABOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 10 cm	> 5000 mins	> 450 g/in	> 3.2 kg/in
SABOPP2520	BOPP Film	25μ	45μ/1.8 mil	< 8 cm	> 5000 mins	> 450 g/in	> 3.4 kg/in
SABOPP2921	BOPP Film	29μ	50μ/2 mil	< 8 cm	> 5000 mins	> 450 g/in	> 3.6 kg/in

Colours	Slit Material	Jumbo Rolls
Transparent/Brown/White/Custom Colours	Width: 36 mm to 144 mm Length: 25 meters to 2000 meters	Width: 1025 mm to 1610 mm Length: Up to 8000 meters

FEATURES

- Strong Adhesive
- Easy to apply on variety of surfaces
- Superior Tensile Strength
- Long Shelf Life


APPLICATION



Bonding



Heavy Duty Packaging




PACKAGING TAPE HOT MELT

Hot Melt BOPP Tapes have very aggressive tack & peel. It also has high-shear properties. Very good for high speed auto taping machines



STRUCTURE

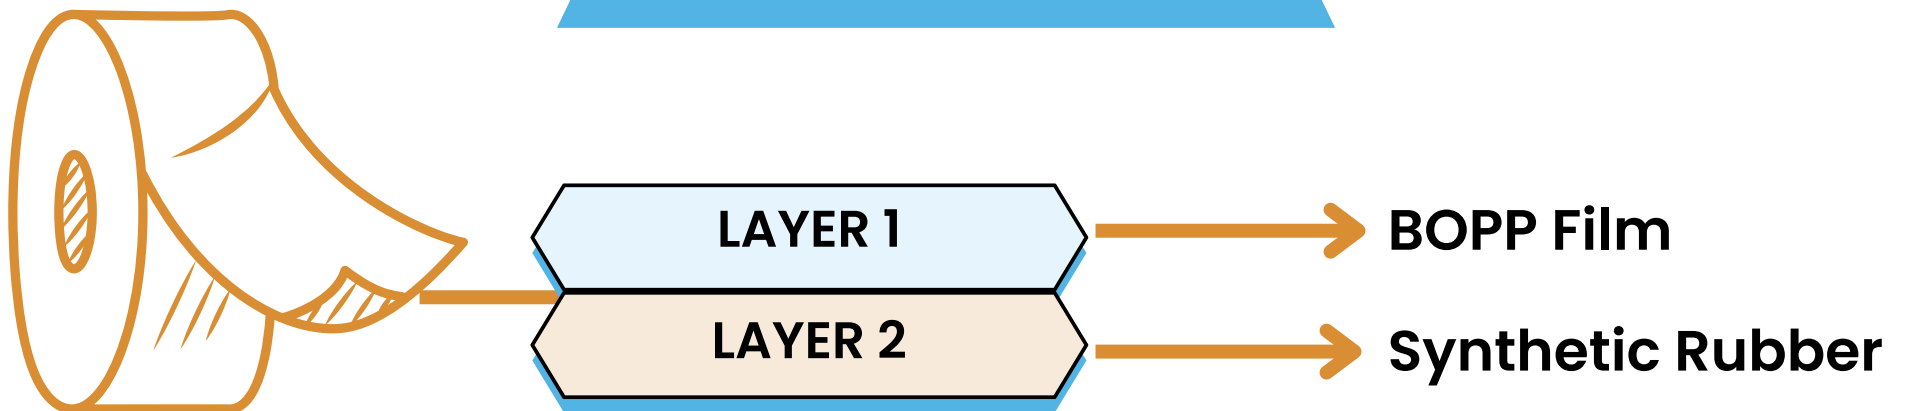

PERFORMANCE


Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
HMOPP2518	BOPP Film	25 μ	45 μ /1.8 mil	< 7cm	> 5000 mins	> 800 g/in	> 3.1 kg/in


Colours	Slit Material	Jumbo Rolls
Transparent/Brown/White/Custom Colours	Width: 24 mm to 144 mm Length: 25 meters to 2000 meters	Width: 1610 mm Length: 4000 meters

FEATURES

- Strong OPP Film
- Easy to apply on variety of surfaces
- Clear adhesive with high tack, peel and shear

APPLICATION

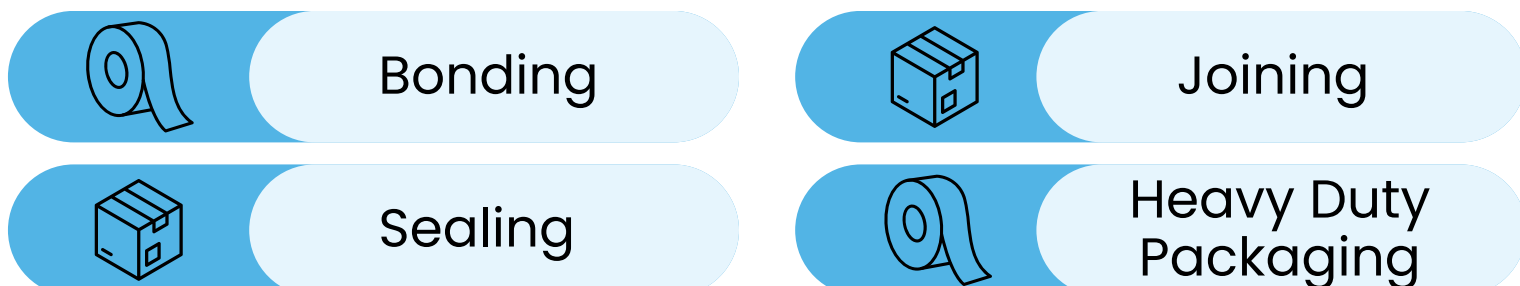




INVISIBLE TAPE

Invisible Tapes have a smooth finish which allows the tape to seamlessly blend with the paper



STRUCTURE

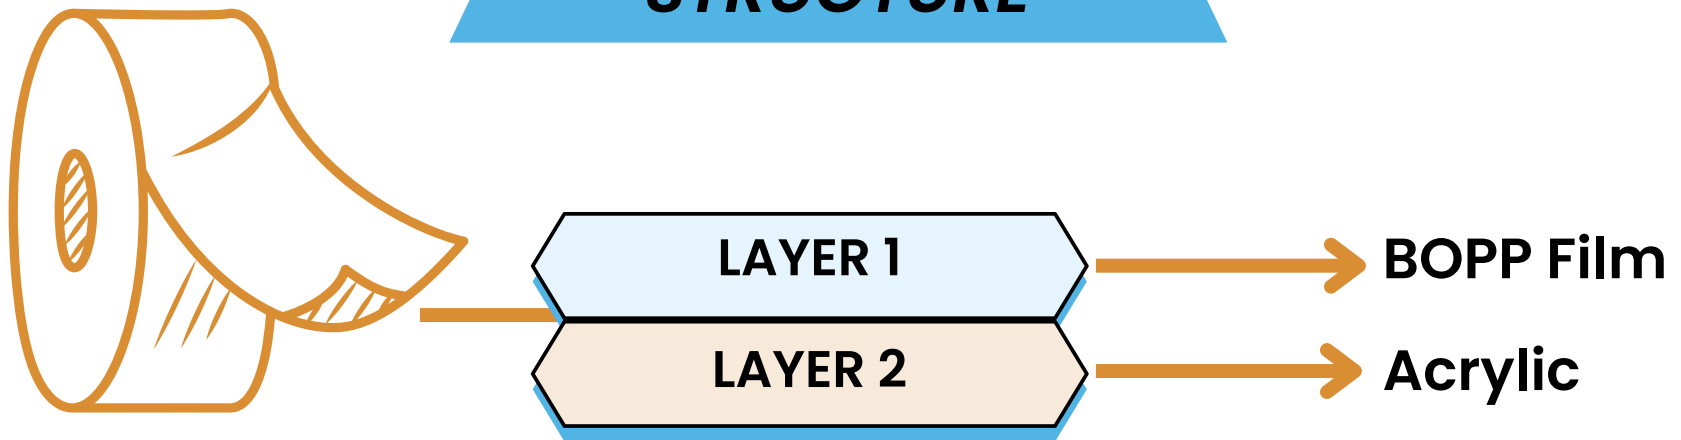

PERFORMANCE


Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2515	BOPP Film	25μ	40μ/1.6 mil	< 8.5 cm	> 700 mins	> 450 g/in	> 3.2 kg/cm

Colours	Slit Material	Jumbo Rolls
Matt White	Width: 12 mm to 100 mm Length: 25 meters to 100 meters	Width: 980 mm Length: 4000 meters


FEATURES

- Invisible / Low visibility when stuck on Paper
- Invisible under photocopy / scanners
- Smooth Finish & Writable
- Leaves no marks during photocopy


APPLICATION




Mending



Gift Packing



Sealing



Labeling




METALLIZED BOPP TAPE

Metallized BOPP Tapes are a good alternative to Aluminum Foil Tapes offering low vapour permeability and good barrier against UV, water & environmental elements



STRUCTURE

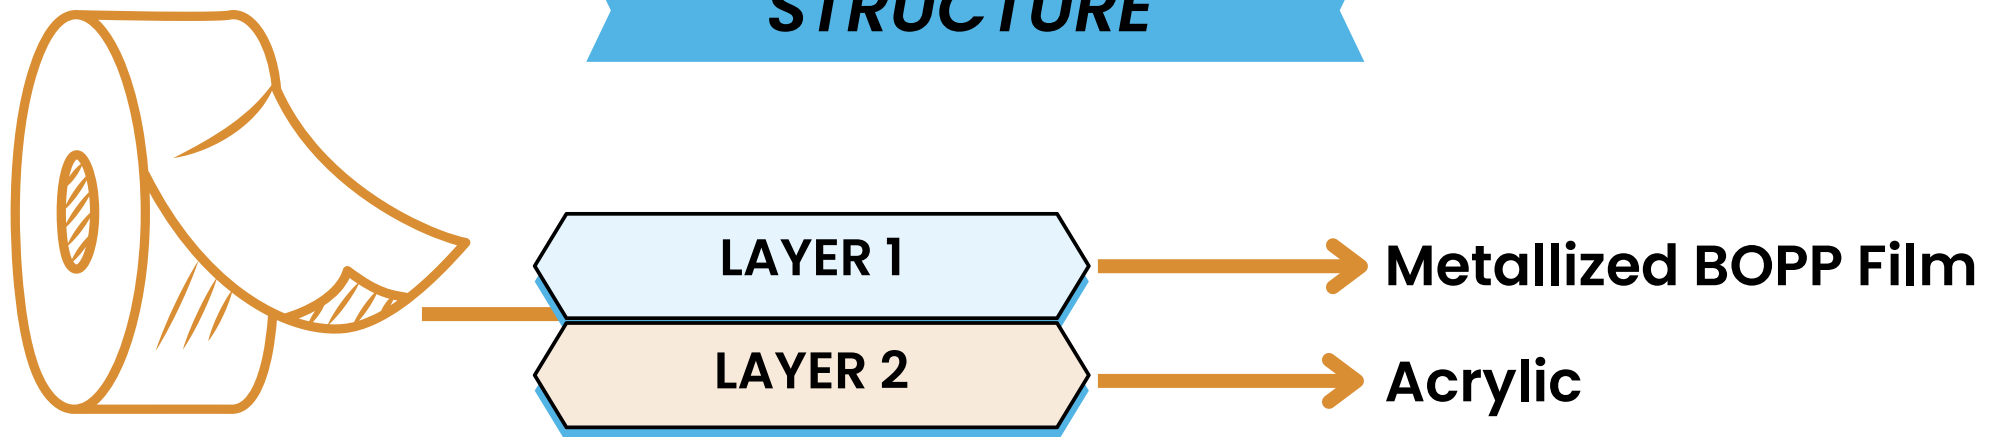

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
MPP25	BOPP Film	25 μ	45 μ /1.8 mil	< 10 cm	> 5000 mins	> 400 g/in	> 3.4 kg/cm
MPP28	BOPP Film	28 μ	55 μ /2.2 mil	< 8 cm	> 5000 mins	> 400 g/in	> 3.6 kg/cm

Colours	Slit Material	Jumbo Rolls
Silver	Width: 12 mm to 75 mm Length: 20 meters to 100 meters	Width: 1025 mm to 1315 mm Length: 4000 meters

FEATURES

- High Reflectivity of light
- High Barrier Properties
- Cost Effective
- Good Tensile Strength

APPLICATION



High Barrier HVAC Tape




Bonding



Sealing



Packaging




WATER RESISTANT TAPE

Made from a highly specialized grade of Acrylic Adhesive

These tapes do not have adhesion failure even when exposed to high levels of moisture and humidity. It is also referred to as Sheathing Tape



STRUCTURE

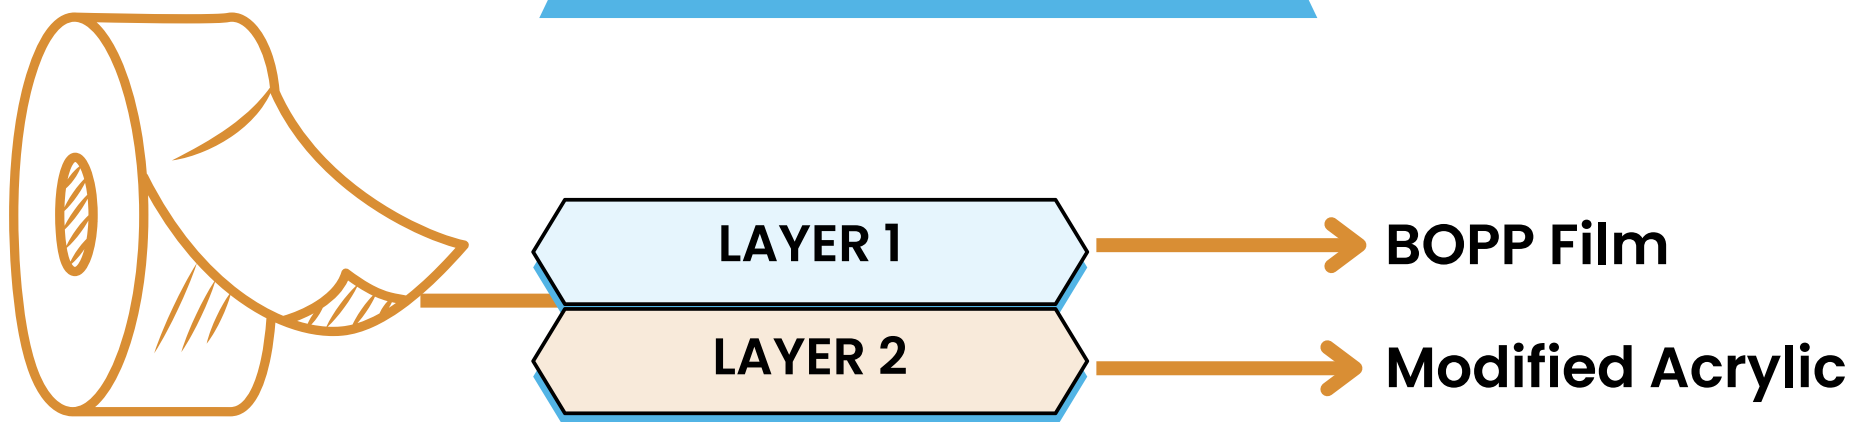

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SAWRBOPP2320	BOPP Film	23μ	43μ/1.72 mil	< 7 cm	> 1600 mins	> 720 g/in	> 2.8 kg/cm


Colours	Slit Material	Jumbo Rolls
Transparent & Custom Colours	Width: 36 mm to 100 mm Length: 25 meters to 200 meters	Width: 1025 mm to 1315 mm Length: 4000 meters

FEATURES

- Water Resistant Adhesive Formulation
- Strong Base Film
- Excellent Tensile Strength
- Long Shelf Life


APPLICATION

	Bonding		Joining
	Heavy Duty Packaging		Sealing



BOPP FREEZER TAPE

Freezer Tape can withstand up to -20° Celsius
Made from a specialized grade of Acrylic
Adhesive, the tape is developed to maintain its
performance at colder temperatures
This is a replacement to traditional rubber
solvent packaging tapes

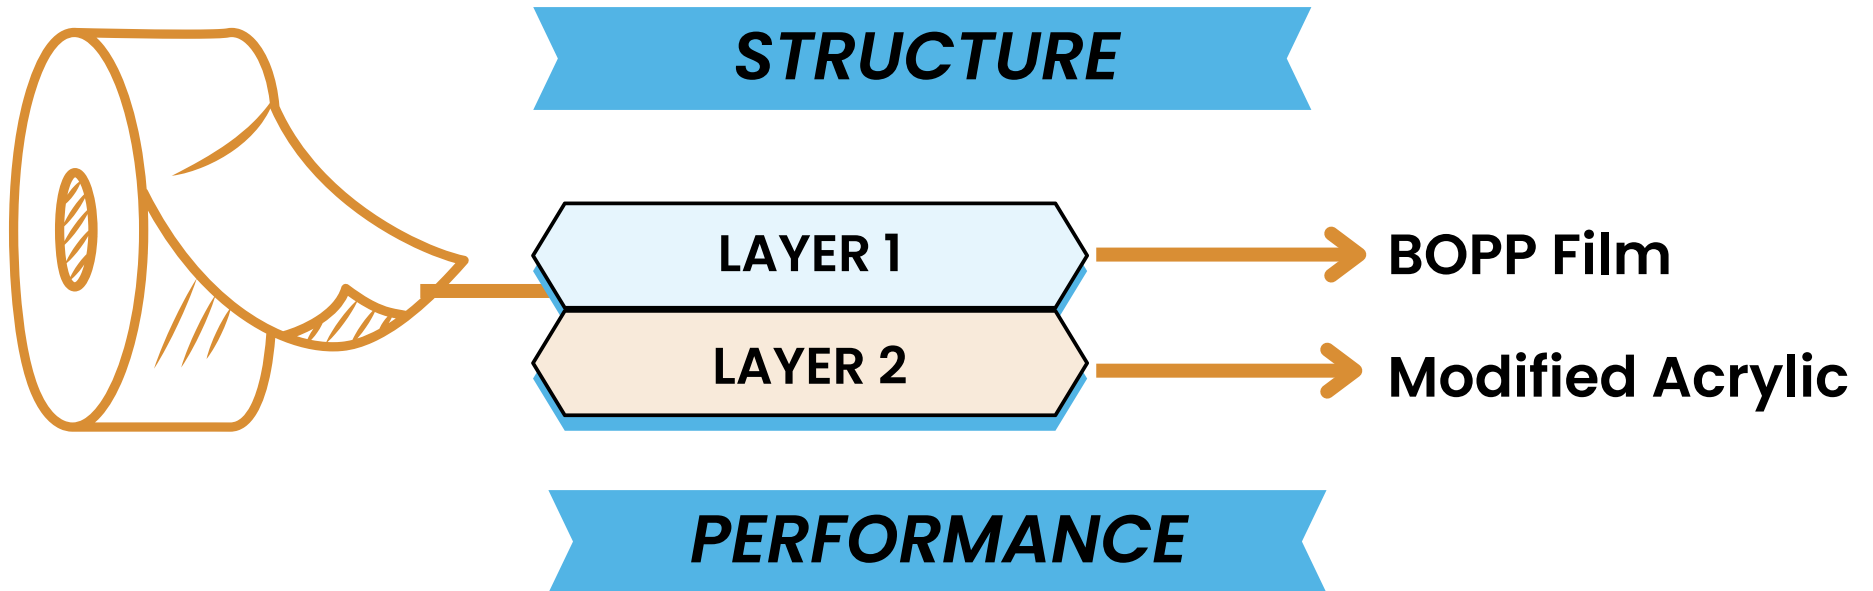

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SABOPP2520	BOPP Film	25 μ	45 μ /1.8 mil	< 8.5 cm	> 2200 mins	> 520 g/in	> 3.2 kg/in
SABOPP2525	BOPP Film	25 μ	50 μ /2 mil	< 8 cm	> 3000 mins	> 600 g/in	> 3.2 kg/in
SABOPP2926	BOPP Film	29 μ	55 μ /2.2 mil	< 7.5 cm	> 3200 mins	> 600 g/in	> 3.4 kg/in

Colours	Slit Material	Jumbo Rolls
Transparent/Brown/Blue/ Custom Colours	Width: 24 mm to 144 mm Length: 25 meters to 1000 meters	Width: 1025 mm to 1610 mm Length: Up to 8000 meters

FEATURES

- Service temperatures -20° C
 $+60^{\circ}$ C
- Application temperatures
 $+5^{\circ}$ C to $+40^{\circ}$ C
- Long Shelf Life
- Strong Adhesive with
high tack, peel & shear


APPLICATION



Bonding



Heavy Duty
Packaging




DOUBLE SIDED BOPP TAPE

Double-Sided BOPP Tapes are used for light to medium-duty splicing and mounting applications. We also provide custom peel/shear for both surfaces



STRUCTURE

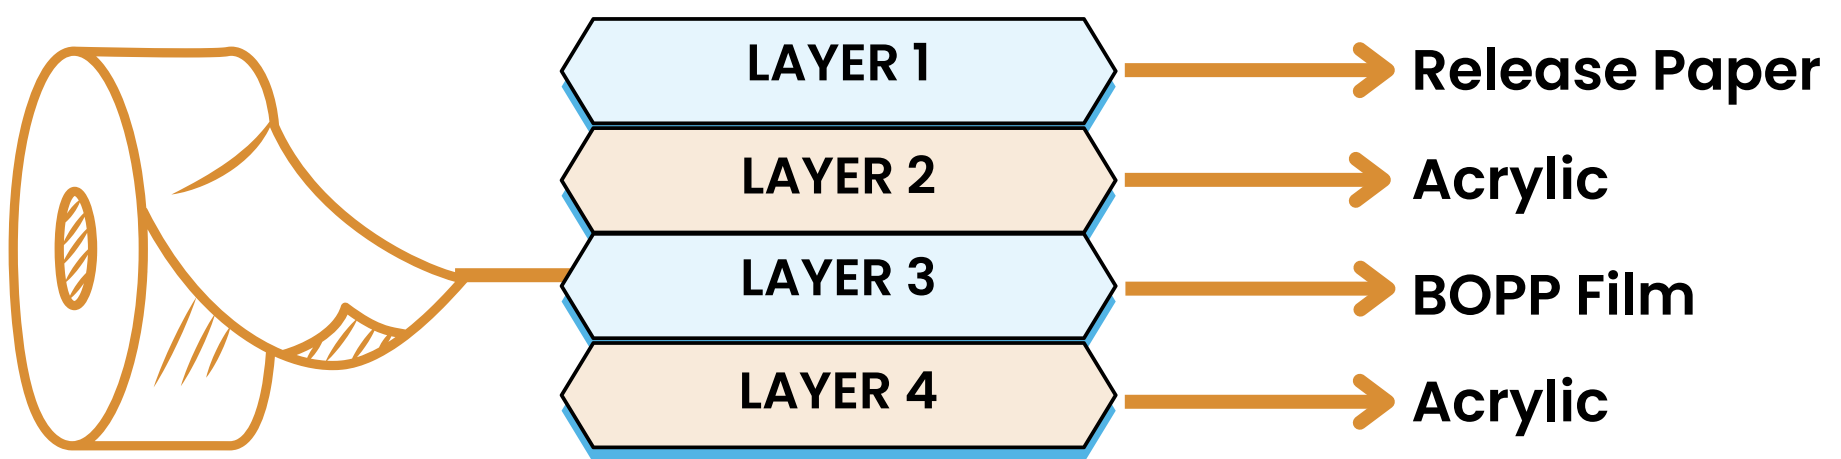

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
DSOPP252424	BOPP Film	25μ	75μ/3 mil	< 7.8 cm	> 2000 mins	> 580 g/in	> 3.4 kg/cm


Colours	Slit Material	Jumbo Rolls
White	Width: 36 mm to 100 mm Length: 25 meters to 2000 meters	Width: 1025 mm to 1315 mm Length: 4000 meters

FEATURES

- High Tack & Peel Adhesive
- Strong Base Film
- Permanent Bonding (non removable)
- Excellent Tensile Strength
- Long Shelf Life

APPLICATION

 Splicing
  Mounting




SHELF STRIP TAPE

Shelf Strip Tapes are custom printed marketing tapes for application on shopping shelves

It has a High Glossy finish, excellent opacity, and superb visibility of the printing, something essential for building a big brand



STRUCTURE

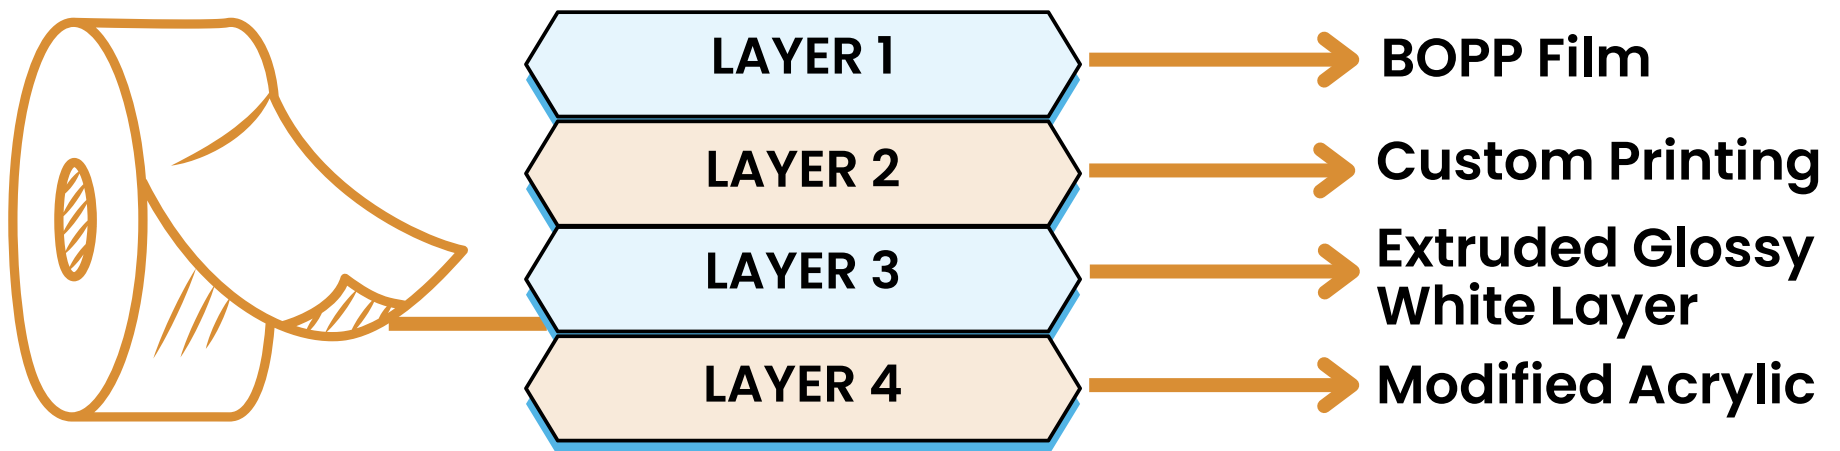

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SST23	BOPP Film	23μ	60μ/2.4 mil	< 12 cm	> 1200 mins	> 440 g/in	> 2.8 kg/cm
SST37	BOPP Film	37μ	75μ/3 mil	< 8 cm	> 1200 mins	> 480 g/in	> 4.2 kg/cm

Colours	Slit Material	Jumbo Rolls
Custom Colours	Width: 24 mm to 100 mm Length: 25 meters to 200 meters	Width: 980 mm Length: 4000 meters

FEATURES

- High Glossy Finish
- Excellent Opacity
- Excellent Tensile Strength
- Superb Visibility of Printing
- Premium Brand Look


APPLICATION



Branding



Packaging




NON ADHESIVE TAPE

These are Branding Tapes with No Adhesive, used for bundling soft fabrics

These are available in Clear, Coloured Films and Custom Printed options



STRUCTURE

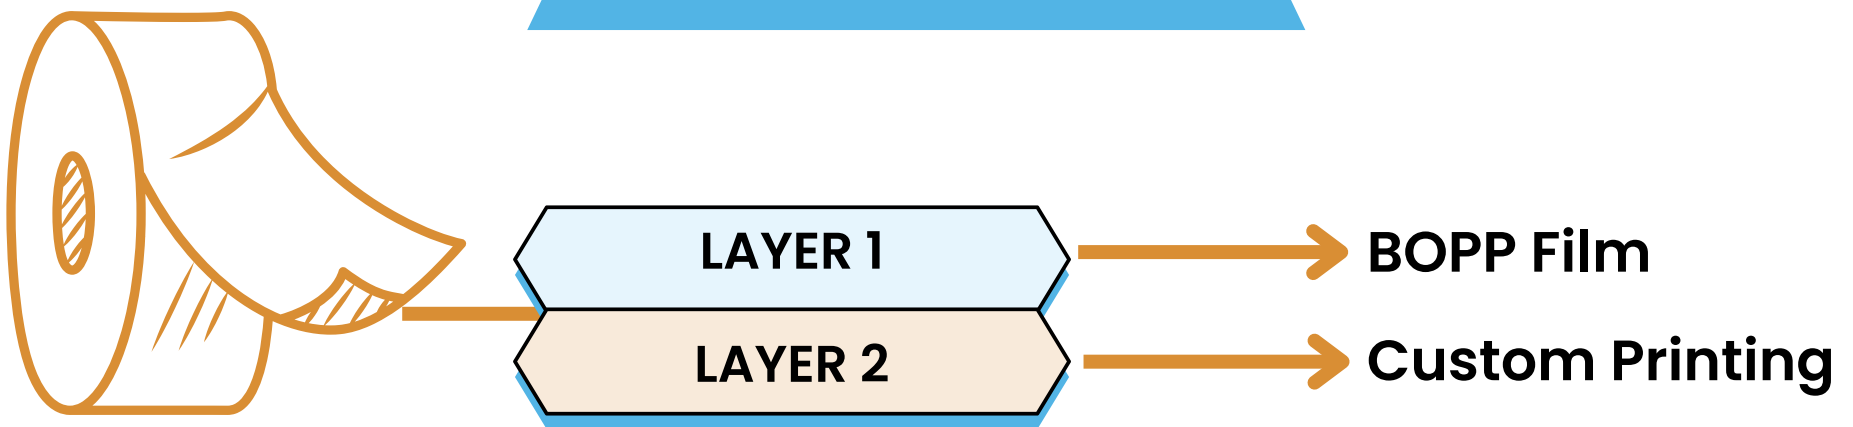

PERFORMANCE

Product Code	Backing	Backing Thickness
NABOPP23	BOPP Film	23 μ /0.92 mil
NABOPP25	BOPP Film	25 μ /1 mil
NABOPP29	BOPP Film	29 μ /1.16 mil
NABOPP37	BOPP Film	37 μ /1.48 mil

Colours	Slit Material	Jumbo Rolls
Custom Printing & Colours	Width: 24 mm to 100 mm Length: 25 meters to 200 meters	Width: 1025 mm to 1315 mm Length: 4000 meters

FEATURES

- Strong Base Film
- Excellent Tensile Strength
- Long Shelf Life
- Cost Effective


APPLICATION



Bundling



Branding




HOLOGRAPHIC TAPE

1) Security - Custom holograms are difficult to duplicate, ensuring your original product is not replicated

2) Stationery - for arts, crafts & decorative purposes



STRUCTURE

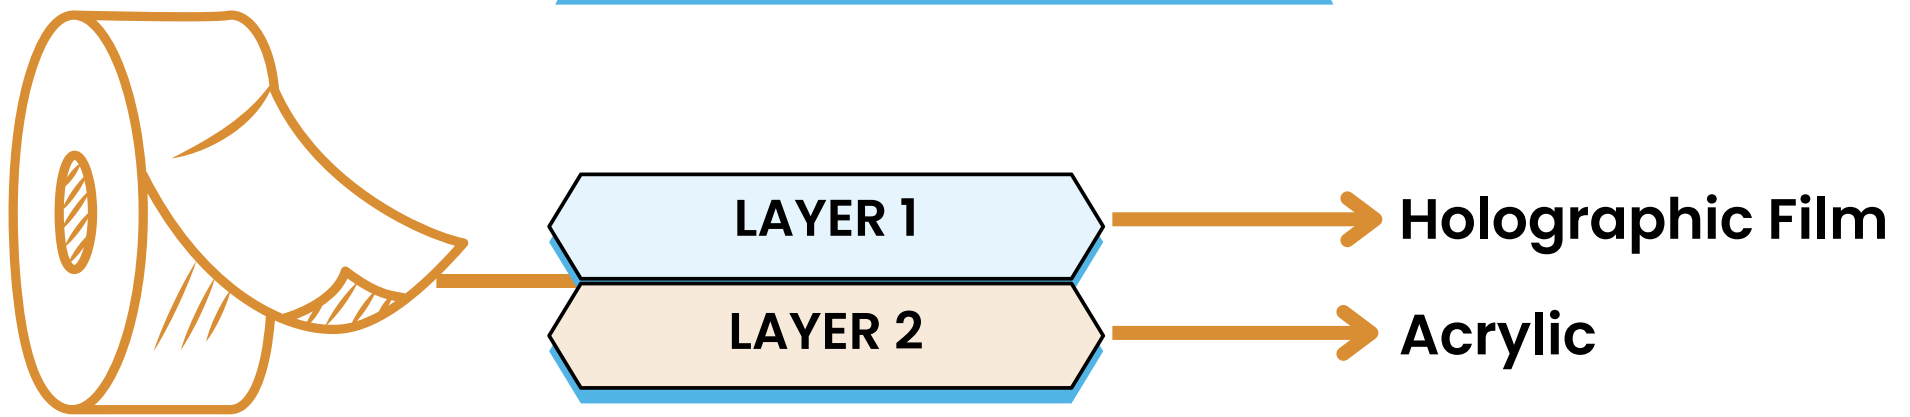

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
HOLO23	HOLO Film	23μ	38μ/1.52 mil	< 12 cm	> 400 mins	> 420 g/in	> 2.8 kg/cm

Colours	Slit Material	Jumbo Rolls
Silver/ Gold/ Green/ Blue/ Red/ Pink	Width: 12 mm to 100 mm Length: 25 meters to 100 meters	Width: 1024 mm Length: 2000 meters

FEATURES

- High Reflectivity
- Impossible to Duplicate
- Intricate and Detailed Patterns

APPLICATION




Arts & Crafts



DIY Applications



High Security Packaging




BOPP NECK SEALING TAPE

Neck or Bag Sealing Tape is used in grocery stores to seal bags of meat, fruit, vegetables & bread

Replacement to traditional bag sealing tapes



STRUCTURE

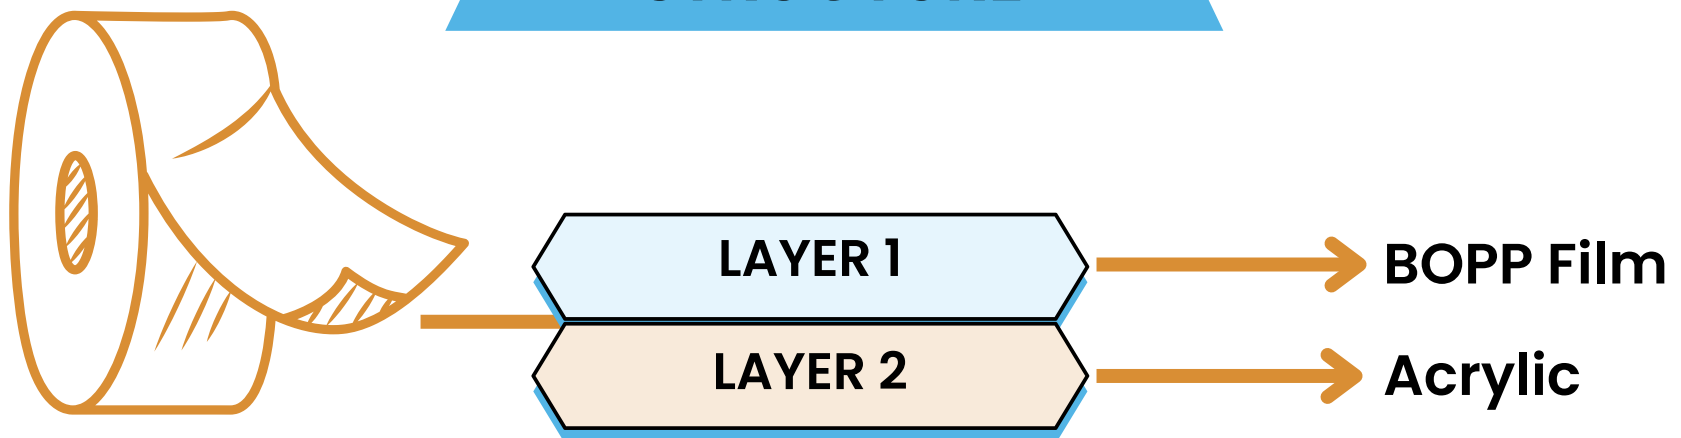

PERFORMANCE


Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
SATBOPPNST3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 750 g/in	> 3.8 kg/in	100%


Colours	Slit Material
Red/Blue/Green and Custom Colours	Width: 8 mm to 24 mm Length: 50 meters to 66 meters

FEATURES

- High Strength OPP Film
- Coloured tapes with high tack, peel, and shear
- PVC Free
- Cost Effective
- Moisture Resistant

APPLICATION

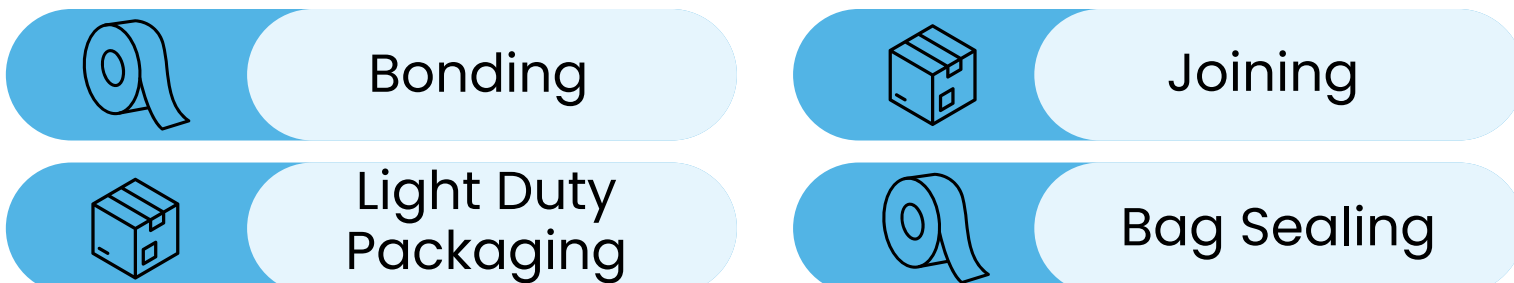




COLD LAMINATION FILM

Self Adhesive Lamination film for high speed label printing presses

These films provide protection from water and contaminants



STRUCTURE

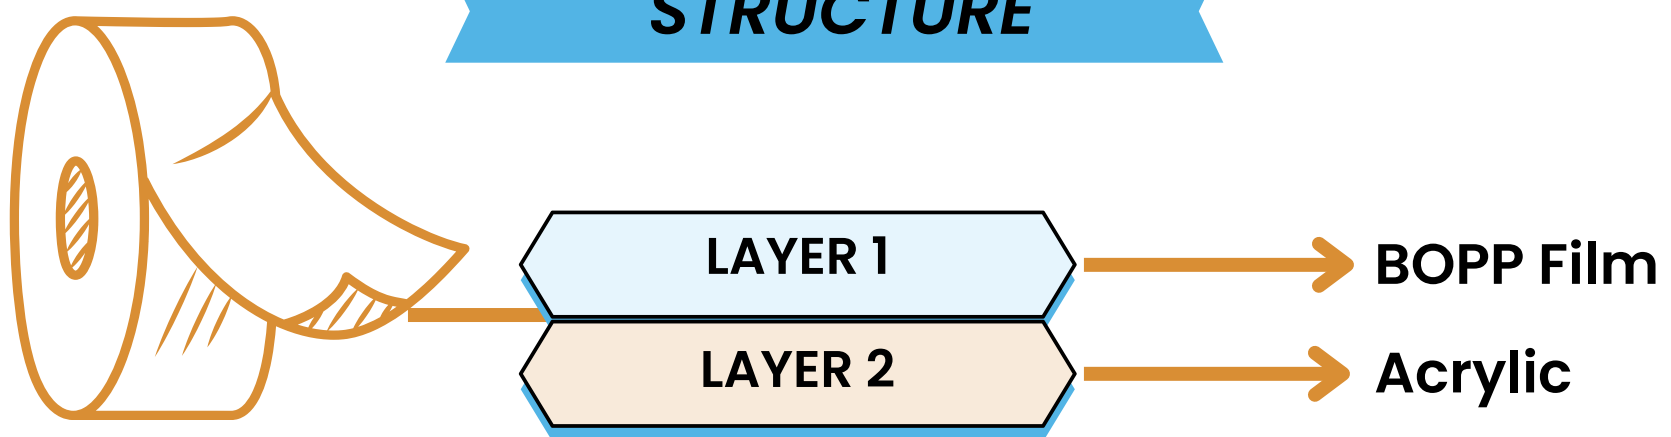

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
LAMIOPP2508	BOPP Film	25 μ	33 μ /1.32 mil	< 11 cm	> 250 g/in	> 3.4 kg/in	100%

Colours	Slit Material
Transparent	Width: 100 mm to 1024 mm Length: 1000 meters

FEATURES


- Provides protection from water and other contaminants
- Glossy & Matter finish both available

APPLICATION



High-speed online lamination on web-presses

TISSUE TAPES



Stick it Without any Issue.....

Double-sided Tissue Tape is a lightweight nonwoven tissue paper coated with adhesive on both sides and laminated to a release paper

Double-sided Tissue Tape is available with Synthetic rubber, Rubber Solvent & Acrylic Adhesive coatings




DS TISSUE TAPE HOT MELT

Double Side Tissue Tapes coated with a Synthetic rubber based adhesive have a high tack and are suitable for lightweight splicing & holding applications



STRUCTURE

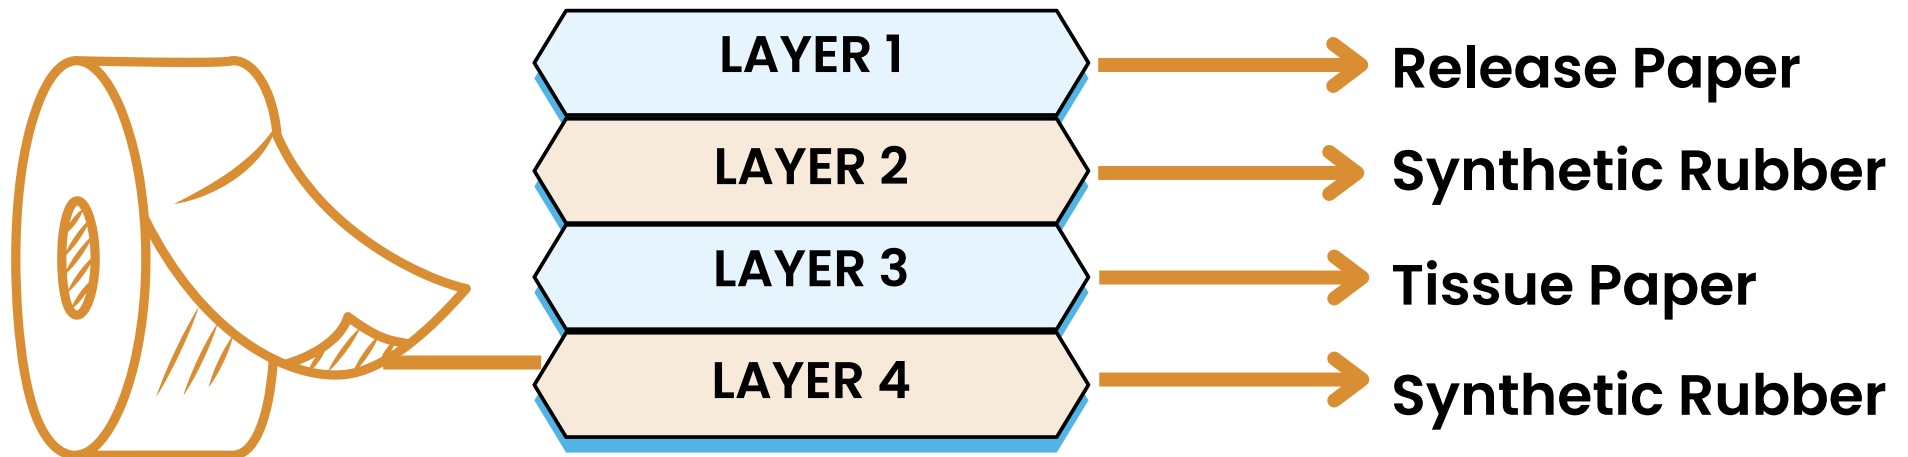

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTHM60	Tissue Paper	60 μ /2.4 mil	< 6 cm	> 600 g/in	> 40 g/in	-10 C to 60 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1020 mm Length: 1000 meters

FEATURES

- High Tack Synthetic Rubber Adhesive
- Easy to apply on smooth surfaces
- Non-Stretchable
- Easy to Handle

APPLICATION



Light Mounting Applications



Joining & Splicing Operation




Arts & Craft




DS TISSUE TAPE SOLVENT BASED

Double Side Tissue Tapes coated with a Rubber Solvent adhesive have a very high tack and are suitable for medium to heavy weight splicing & holding applications

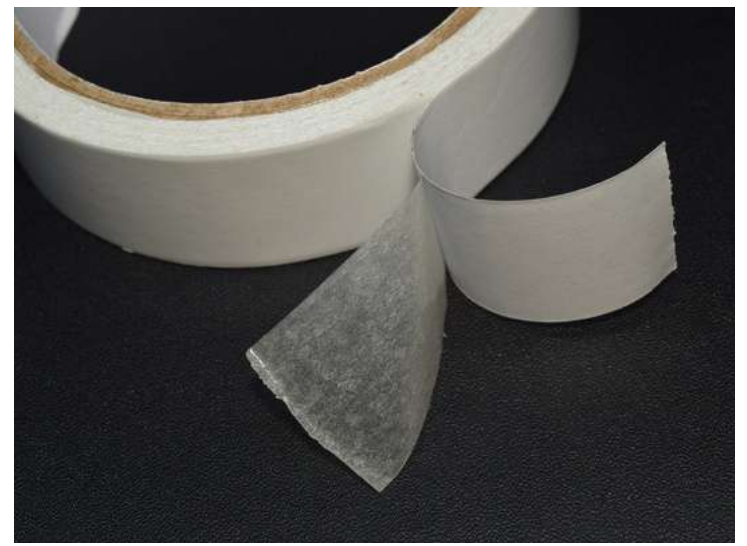

STRUCTURE

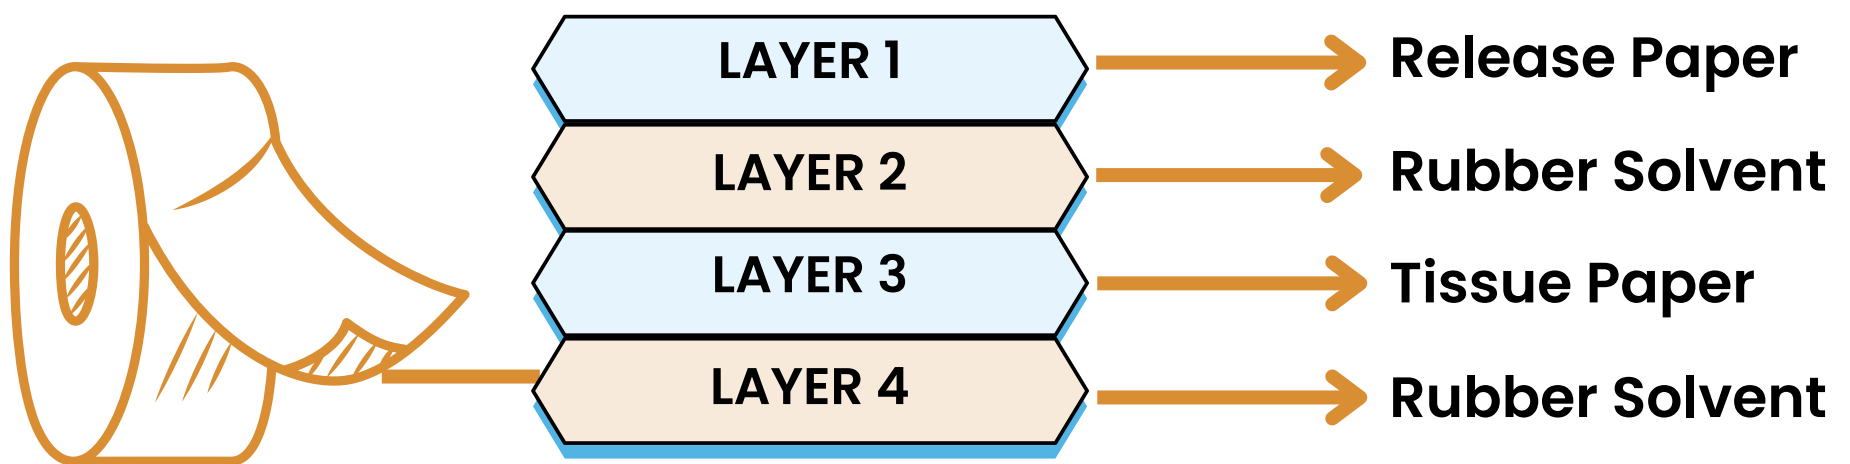

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTSB70	Tissue Paper	70µ/2.8 mil	< 5 cm	> 800 g/in	> 40 g/in	-10 C to 60 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1260 mm Length: 1000 meters

FEATURES

- High Tack Solvent Based Adhesive
- Easy to apply on smooth surfaces
- Non-Stretchable
- Easy to Handle


APPLICATION



Mounting Applications




Joining & Splicing Operation




DS TISSUE TAPE ACRYLIC

Double Side Tissue Tapes coated with acrylic adhesive provides good results at medium to heavy weight splicing applications.

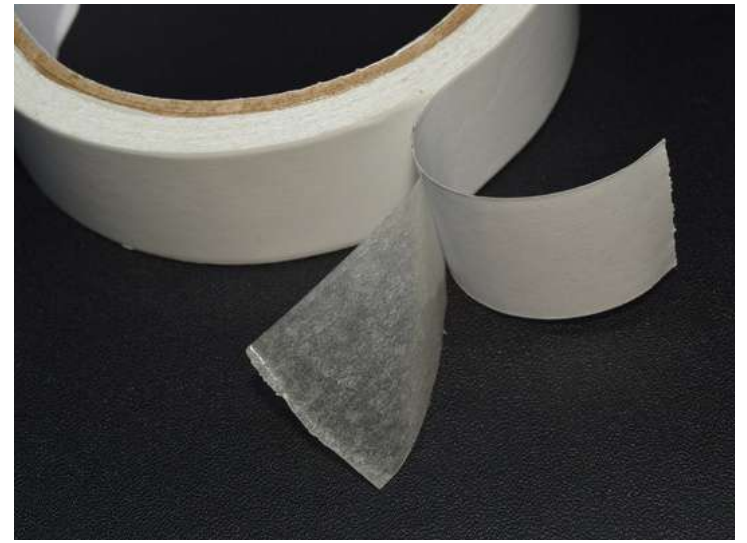

The tapes are UV resistant and are ideal for long lasting applications.

STRUCTURE

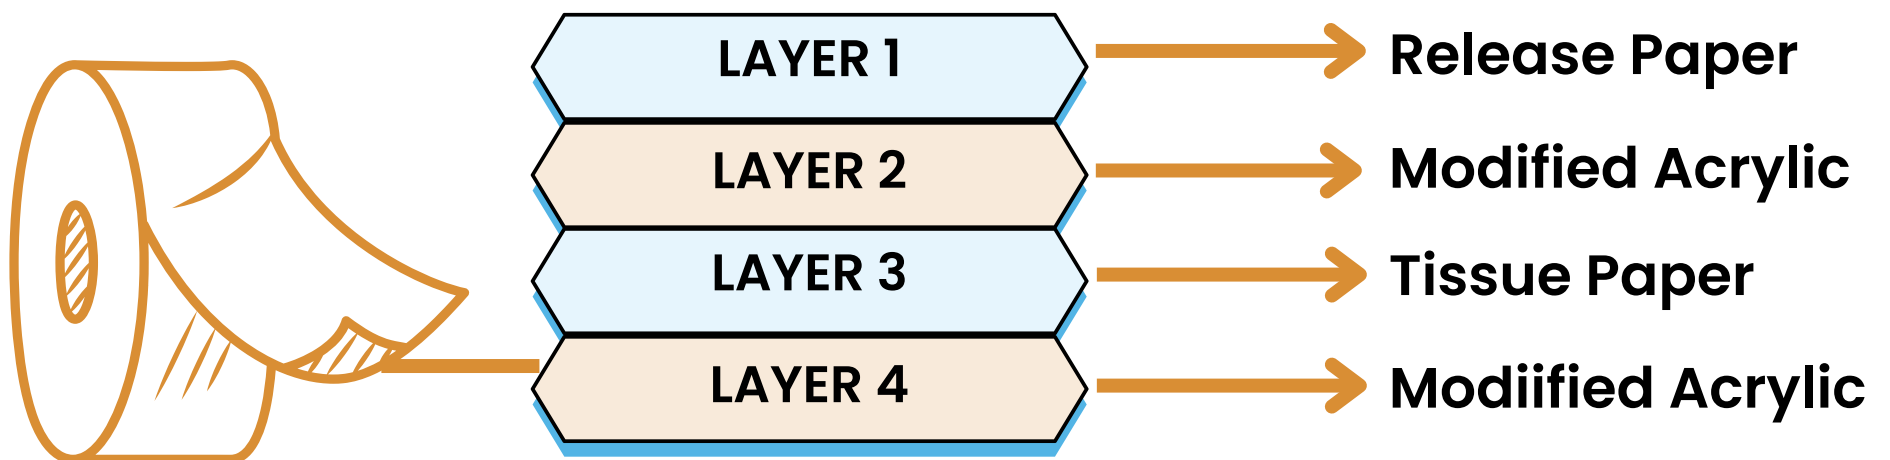

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTWB105	Tissue Paper	105µ/4.2 mil	< 4.5 cm	> 1000 g/in	> 40 g/in	-20 C to 100 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1220 mm Length: 1000 meters

FEATURES

- Easy to apply on smooth surfaces
- Easy to Handle
- Eco-Friendly, 100% Recyclable
- Non-Stretchable
- Re-Pulpable

APPLICATION



Mounting Applications



Joining & Splicing Operation


PAPER PACKAGING

TAPES



The environmental perspective is becoming an increasingly important aspect in packaging

We offer Self Adhesive Kraft Paper Tapes, Water Activated Tape, Reinforced Water Activated Tape & Self Adhesive Crepe Paper Tape




SELF ADHESIVE KRAFT PAPER TAPE

Self-Adhesive Kraft Paper Tapes are made of high-strength & 100% recycled Kraft paper having fantastic durability

The tapes are 100% recyclable / compostable / bio-degradable



STRUCTURE

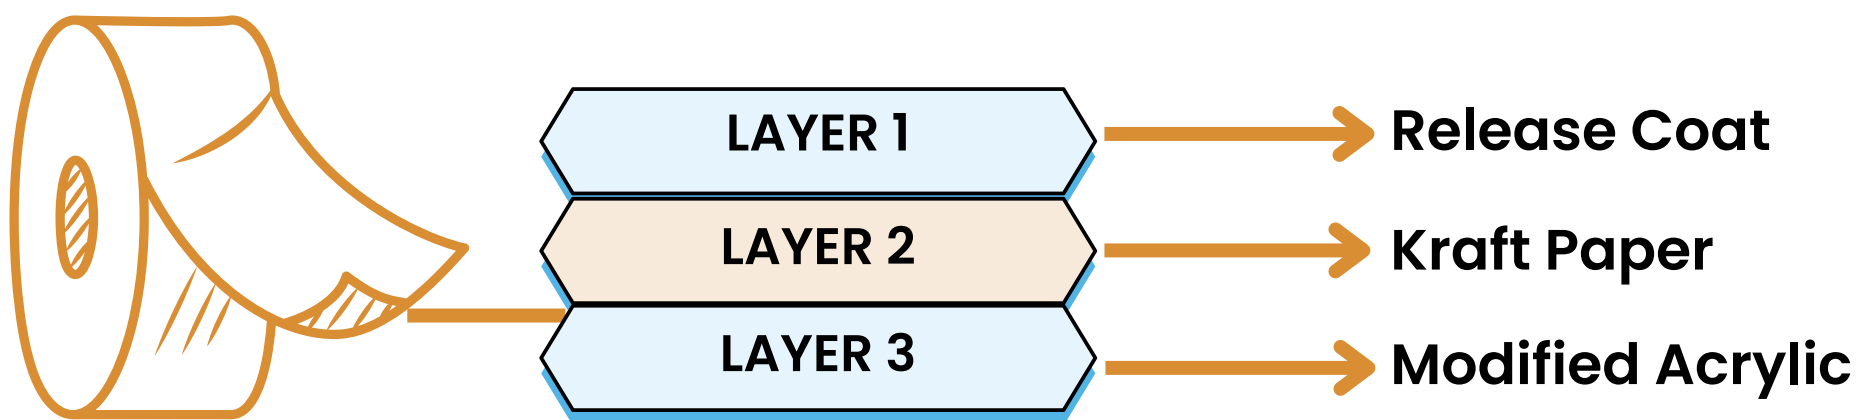

PERFORMANCE

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Peel	Tensile	Service Temperature
SAK70	Kraft Paper	70 GSM	120 GSM	> 1500 mins	> 900 g/in	> 7 kg/in	-20° C to 80° C

Colours	Slit Material	Jumbo Rolls
Brown & White	Width: 18 mm to 96 mm Length: 25 meters to 500 meters	Width: 1060 mm Length: 500 meters

FEATURES

- High durability and tear resistance
- Easy to handle & apply
- Eco-Friendly, 100% Recyclable, Compostable & Re-pulpable


APPLICATION



Light-Heavy Duty Packaging




General Bonding & DIY Applications




WATER ACTIVATED TAPE

Water-Activated Paper Tape or Gummed Paper Tape is an economic solution for sustainability and security

Once applied the tapes bond permanently with Kraft paper cartons

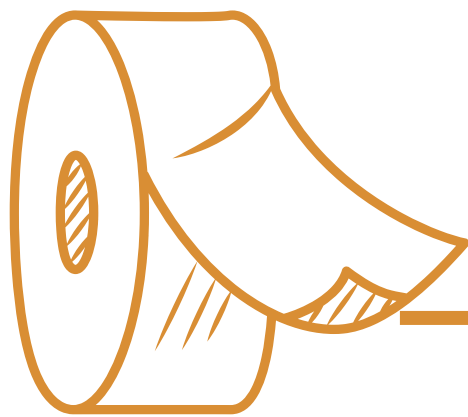

STRUCTURE

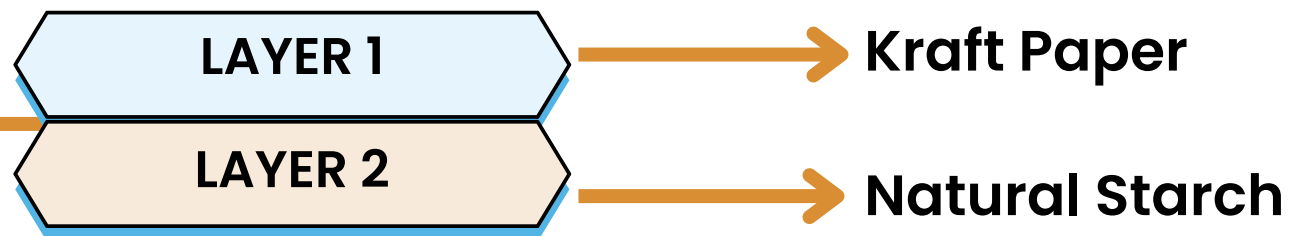

PERFORMANCE

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Bonding to Paper	Tensile	Service Resistance
KRA70WAT	Kraft Paper	70 GSM	95 GSM	> 10000 mins	Permanent	> 7 kg/in	-30° C to 80° C

Colours	Slit Material	Jumbo Rolls
Brown & White	Width: 18 mm to 96 mm Length: 25 meters to 500 meters	Width: 1060 mm Length: 500 meters

FEATURES

- High durability and tear resistance
- Cost Effective
- Eco-Friendly, 100% Recyclable, Compostable & Re-pulpable
- Permanent Bond with the surface


APPLICATION



Light-Heavy Duty Packaging



Tamper Proof Packaging




REINFORCED WATER ACTIVATED TAPE

Reinforced Water-Activated Paper Tape is tri-way reinforced with fiber-glass thread for high tear resistance

Once applied the tapes bond permanently with Kraft paper cartons



STRUCTURE

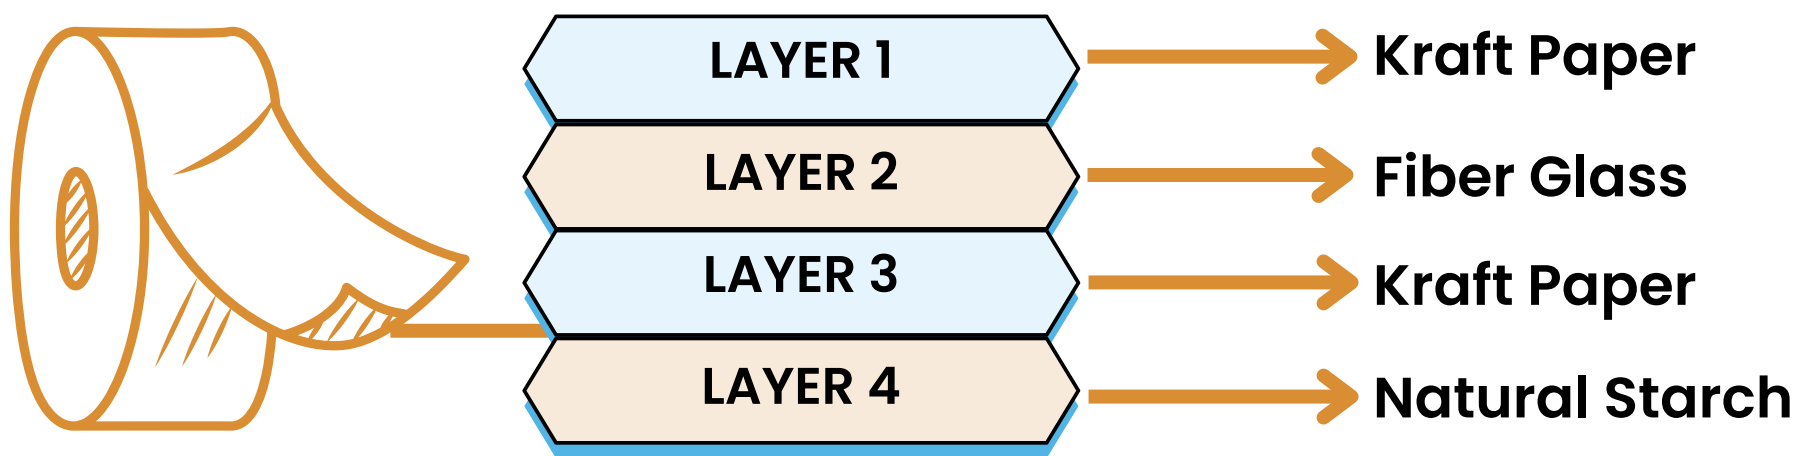

PERFORMANCE

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Bonding to Paper	Tensile	Service Resistance
REIN140WAT	Reinforced Kraft Paper	100 GSM	140 GSM	>10000 mins	Permanent	> 19 kg/in	-30° C to 80° C

Colours	Slit Material	Jumbo Rolls
Brown	Width: 18 mm to 96 mm Length: 25 meters to 500 meters	Width: 1060 mm Length: 1000 meters

FEATURES

- High durability and tear resistance
- Permanent Bond with the surface
- Reinforced Fiber Glass for increased Strength

APPLICATION




Tamper Proof Packaging



Heavy Duty Packaging


MASKING TAPES



***Masking is what
Everyone is Asking....***

Masking tape is an easy-to-unwind, and easy-to-tear paper tape, that can be applied on many different surfaces and removed without leaving any residue or causing any damage

We offer our Masking Tape P6030 for Automotive applications and P6035 & K6143 for General Purpose usages



GENERAL PURPOSE MASKING TAPE K6143

Grade K6143 is a versatile masking tape, with a natural rubber-based adhesive. It has a high holding power, and easily removable without residue or breaking



STRUCTURE



PERFORMANCE

Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
K6143MASK	Crepe Paper	55 GSM	85 GSM	125μ/5 mil	> 1500 mins	> 750 g/in	7 kg/in	60° C x 60 mins

Colours	Slit Material	Jumbo Rolls
Off White	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters

FEATURES

- Strong Crepe Paper
- Clean Removability
- Good Holding Power
- Residue Free
- Temperature resistance 60 degrees x 60 minutes

APPLICATION



Painting Jobs




Furniture Holding



Labelling Supplies



Decoration Purposes




AUTOMOTIVE MASKING TAPE P6030

Grade P6030 is a versatile masking tape, with modified acrylic adhesive. It has a good peel, high holding power, and is easily removable without residue or breaking. The tapes are also UV resistant



STRUCTURE

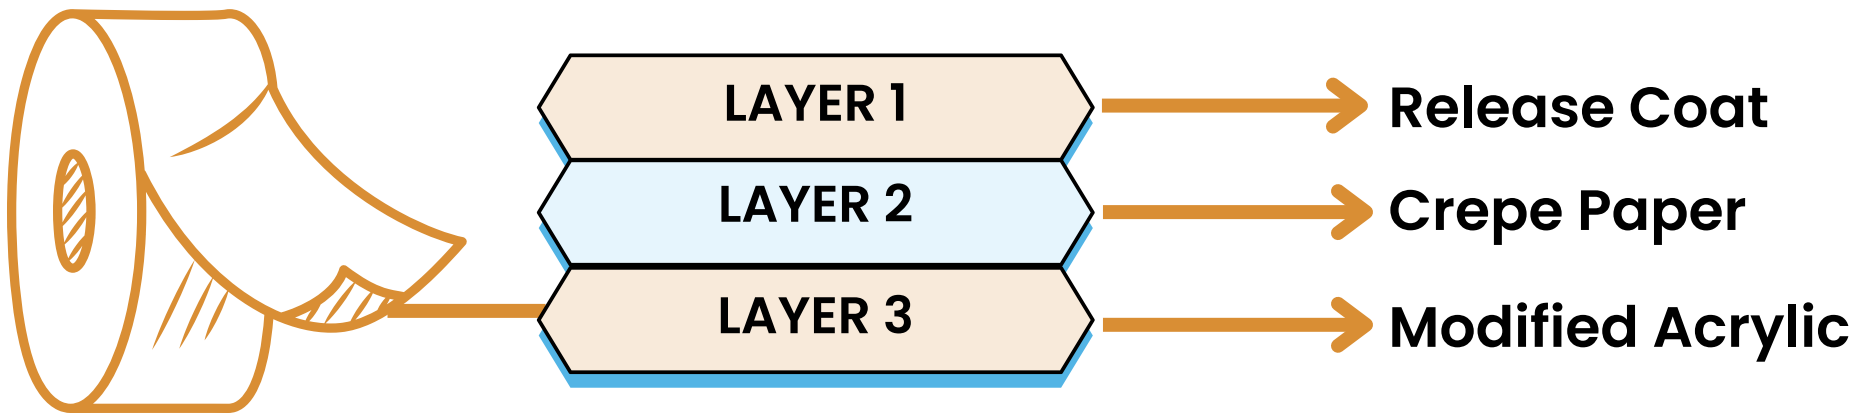

PERFORMANCE


Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
P6030MASK	Crepe Paper	60 GSM	90 GSM	125µ/5 mil	> 600 mins	> 400 g/in	6 kg/in	80° C x 60 mins

Colours	Slit Material	Jumbo Rolls
White	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters


FEATURES

- Strong Crepe Paper
- Clean Removability
- 30 day residue free removal guaranteed
- UV Resistant
- Temperature resistance 80 degrees x 60 minutes


APPLICATION




Painting Jobs



Temporary Holding



Labelling Supplies




GENERAL PURPOSE MASKING TAPE PXL6030

Grade PXL6030 is a versatile masking tape, with modified acrylic adhesive. It has a moderate peel, high holding power, and is easily removable without residue or breaking. The tapes are also UV resistant



STRUCTURE

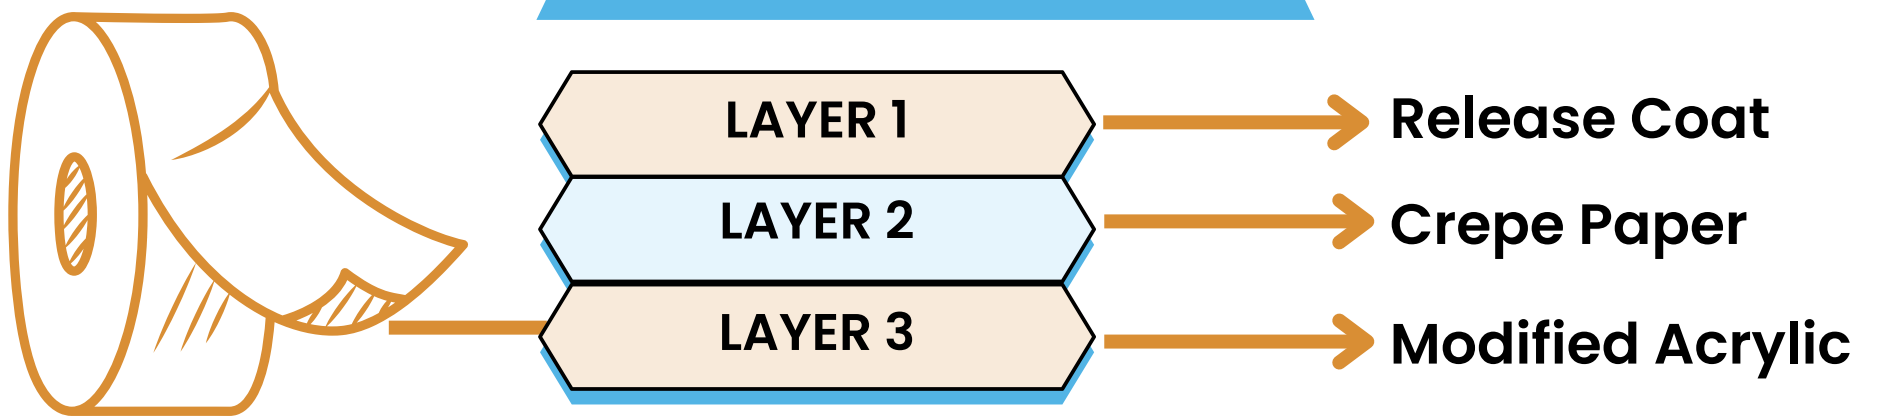

PERFORMANCE





Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
PXL6030MASK	Crepe Paper	60 GSM	95 GSM	125µ/5.2 mil	> 1440 mins	> 450 g/in	6 kg/in	80° C x 60 mins

Colours	Slit Material	Jumbo Rolls
White	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters


FEATURES

- Strong Crepe Paper
- Clean Removability
- 30 day residue free removal guaranteed
- UV Resistant
- Temperature resistance 80 degrees x 60 minutes

APPLICATION

 Painting Jobs	 Furniture Holding
 Labelling Supplies	 Decoration Purposes


FOAM TAPES

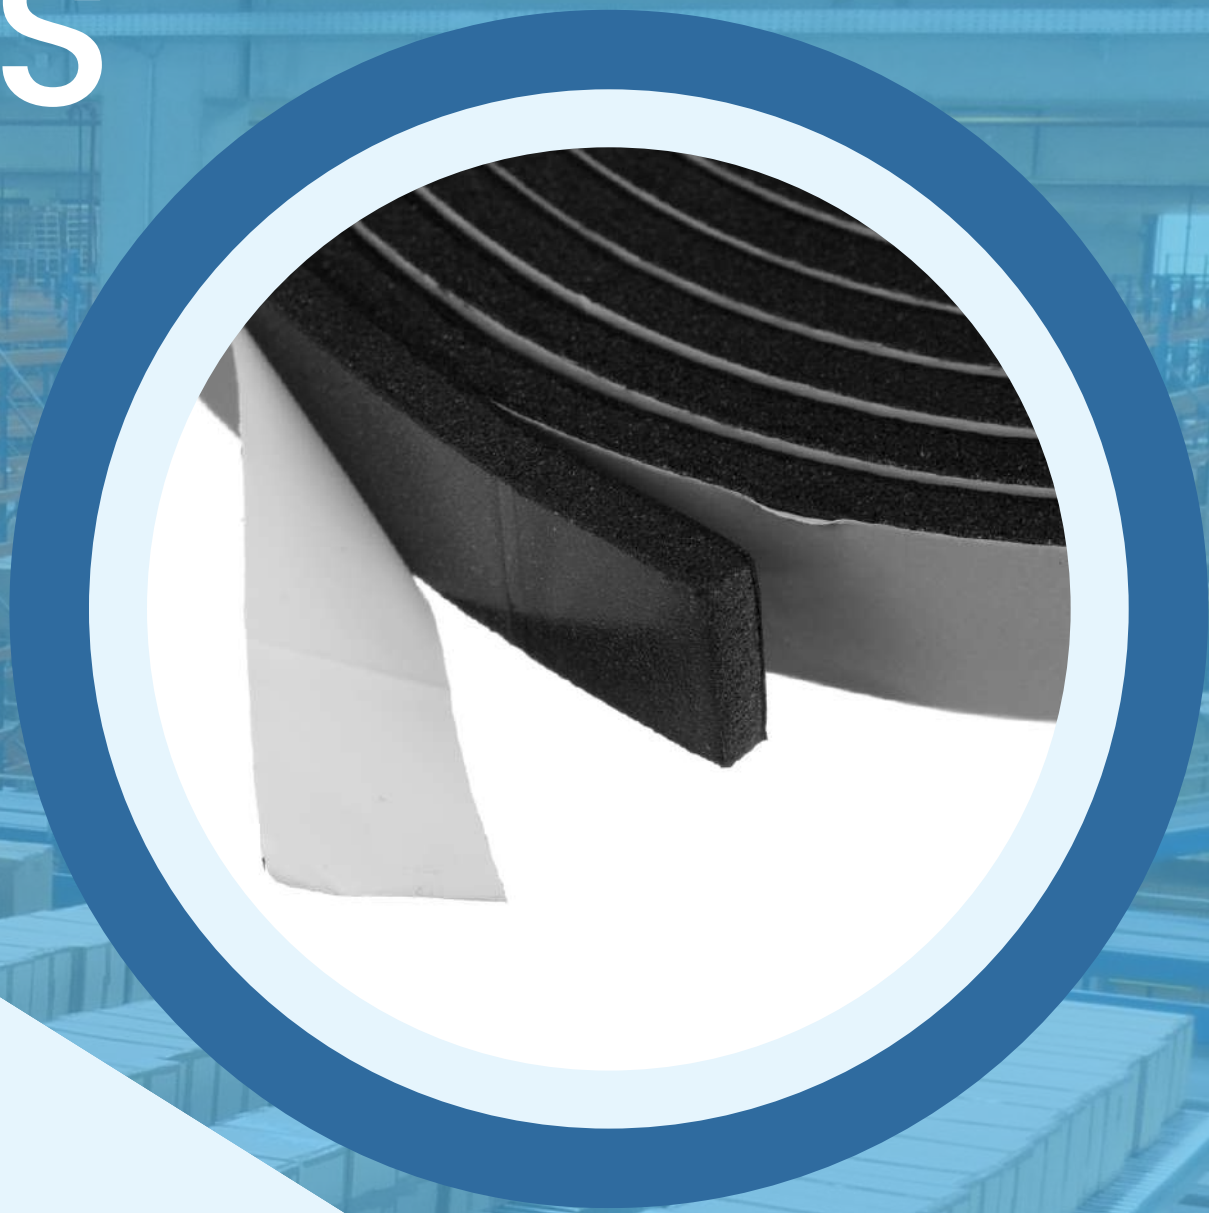

Why Roam? When you have Foam....

Our range of EVA Foam Tapes are used in insulation, light weight mounting and sound proofing industry. It is a superior alternative to PE Foam Tapes, as they have high strength, substantial density & greater moisture resistance.

Can be offered in Single Side & Double Sided Adhesives




GASKET TAPE

Gasket Tape are used in sealing Electrical panels in industrial units and automobile units

These tapes are commonly made of EVA Foam as a substrate, coated with acrylic adhesive



STRUCTURE

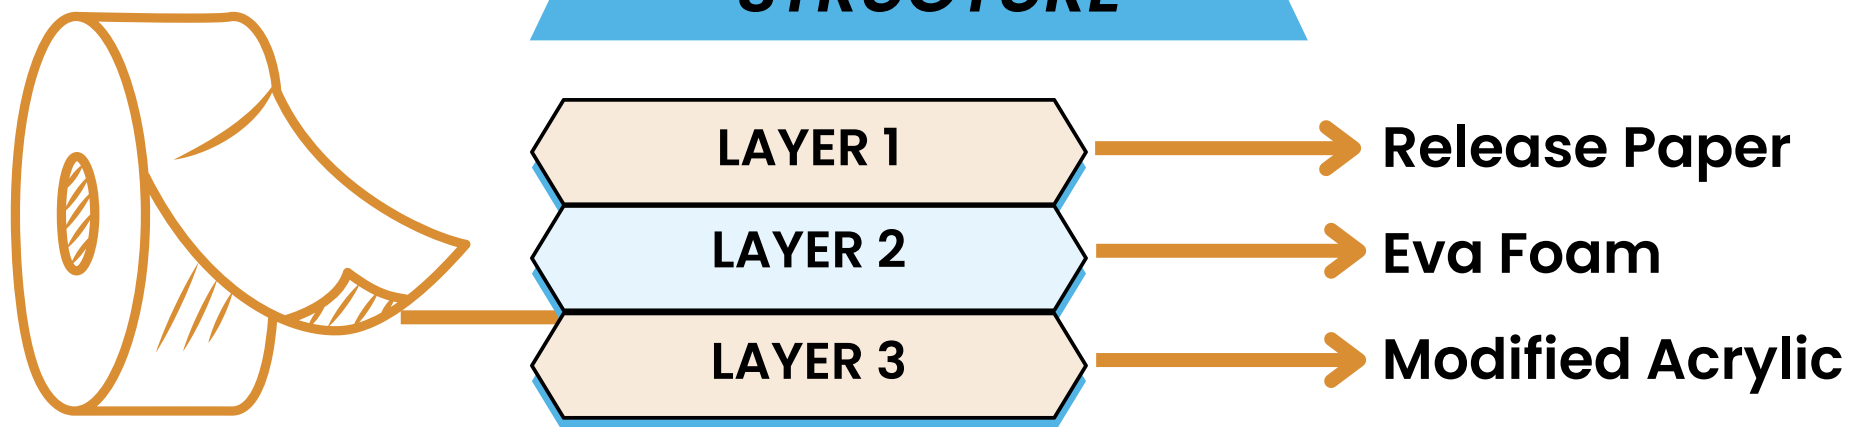

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFBC2MM	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFBC3MM	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFBC4MM	EVA Foam	4mm	< 8 cm	> 700 mins	> 800 g/in	> 2.2 kg/in	20%
SSFBC5MM	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%
SSFBC6MM	EVA Foam	6mm	< 8 cm	> 700 mins	> 800 g/in	> 3.2 kg/in	20%
SSFBC8MM	EVA Foam	8mm	< 8 cm	> 700 mins	> 800 g/in	> 4.2 kg/in	20%
SSFBC10MM	EVA Foam	10mm	< 8 cm	> 700 mins	> 800 g/in	> 5.2 kg/in	20%

Colours	Slit Material	Jumbo Rolls
Black	Width: 10 mm to 100 mm, Length: 10 meters	Width: 1020 mm, Length: 100 meters

FEATURES

- High strength acrylic adhesive for superior bonding
- Elastic foam for great cushioning
- Easy to apply on variety of surfaces


APPLICATION



Gasketing / Insulation of Electrical Panels



Protection from Sharp Edges




EVA FOAM INSULATION TAPE

White EVA foam tape are used for heat insulation

These tapes are coated with modified acrylic adhesive for wide heat resistance. Service temperatures between -10°C to 70°C



STRUCTURE

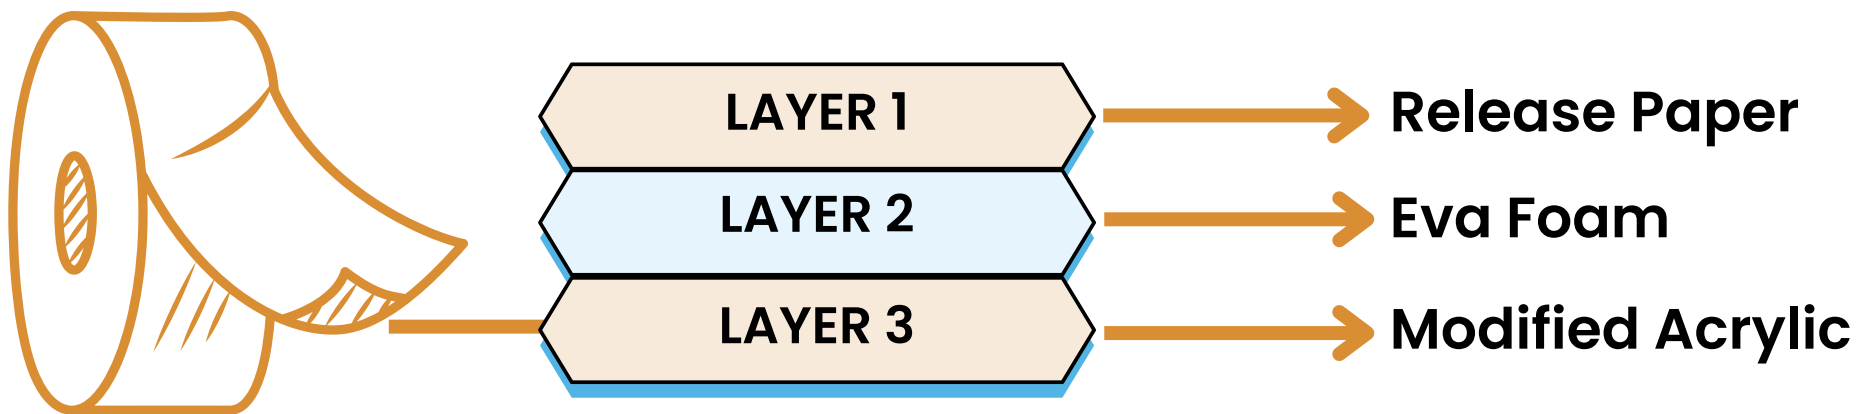

PERFORMANCE


Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFWB2MM	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFWB3MM	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFWB5MM	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%

Colours	Slit Material	Jumbo Rolls
White	Width: 10 mm to 100 mm Length: 10 meters	Width: 1020 mm Length: 100 meters

FEATURES

- Elastic foam for great cushioning
- High strength acrylic adhesive for superior bonding
- Easy to apply on variety of surfaces


APPLICATION



Light-Duty Electrical Insulation Applications



Light-Duty Heat Insulation Applications




DOUBLE SIDED MOUNTING TAPE

EVA Double Side Foam tapes are used in lightweight mounting applications.

Our tapes are typically designed to hold 1/2 kg load per square inch of tape.



STRUCTURE

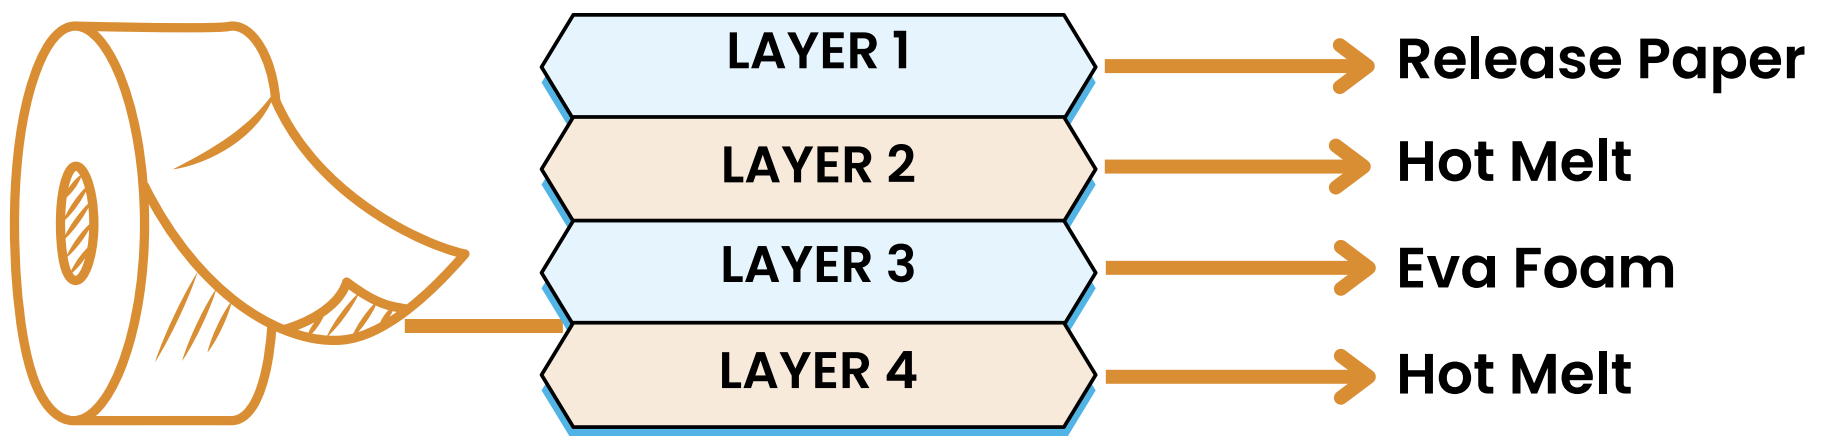

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
DSFHM2MM	EVA Foam	2mm	< 7 cm	> 1000 mins	> 1500 g/in	> 2 kg/in	20%

Colours	Slit Material	Jumbo Rolls
White	Width: 6 mm to 50 mm Length: 0.7 meters to 10 meters	Width: 1020 mm Length: 100 meters

FEATURES

- Elastic foam for great cushioning
- Strong adhesive for superior bonding
- Easy Unwind
- Easy to apply on variety of surfaces

APPLICATION



Light Mounting



DIY & Stationery



Cushioning


SURFACE PROTECTION TAPES



Safeguard...
Protect...Shield...

Surface Protection Tapes are engineered to protect the toughest surfaces from scratches, chemicals, and UV damage

Apart from custom solutions, we have a wide standard product range for different surfaces.




GENERAL PURPOSE SURFACE PROTECTION TAPE

Suitable for low gloss or low matt surfaces like glass, steel, wood, laminates, polycarbonate sheets etc.



STRUCTURE

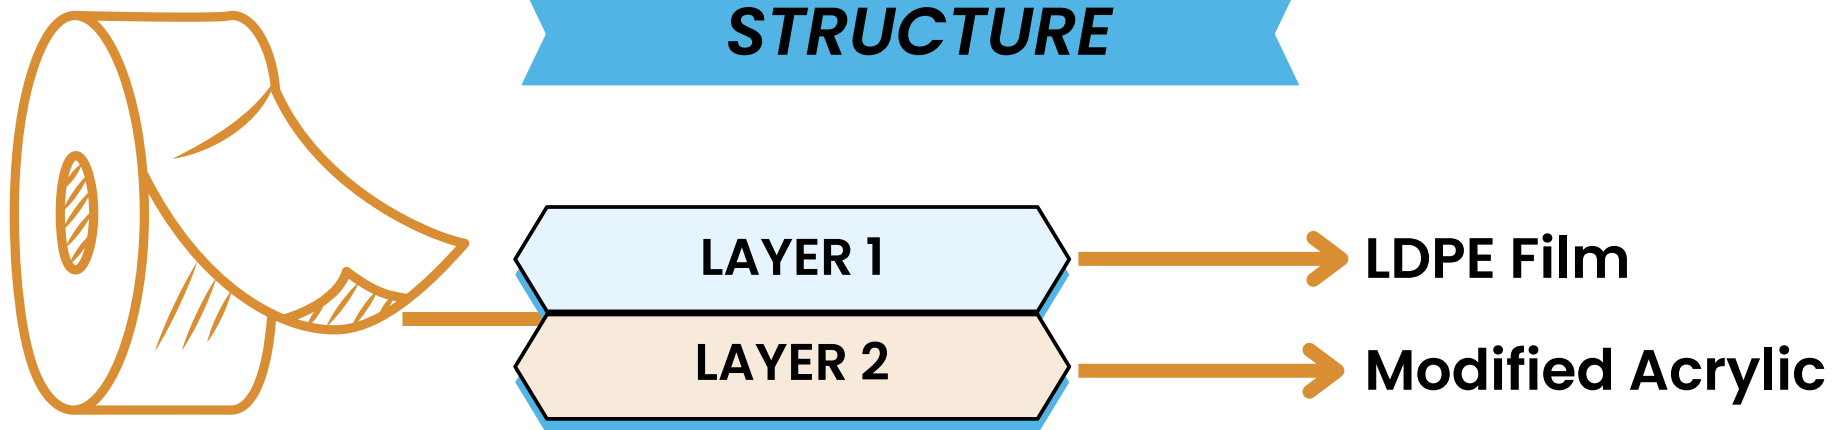

PERFORMANCE


Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
30NAT120P	Multi-Layer LDPE Film	31μ/1.24 mil	100-120 g/in	< 20 cm	2.3 kg/in	6 months
40NAT120P	Multi-Layer LDPE Film	41μ/1.64 mil	100-120 g/in	< 20 cm	3.1 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Transparent / Custom Colours	Width: 24 mm to 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters


FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION



Usable on multiple surfaces like Metal, Laminates, Glass, Ceramics and, Plastics




FLOOR GUARD TAPE

Mexim Floor Guard can be applied to any surface. It provides protection from mechanical damage, chemical resistance, and most importantly resistance from scratches during construction activities



STRUCTURE

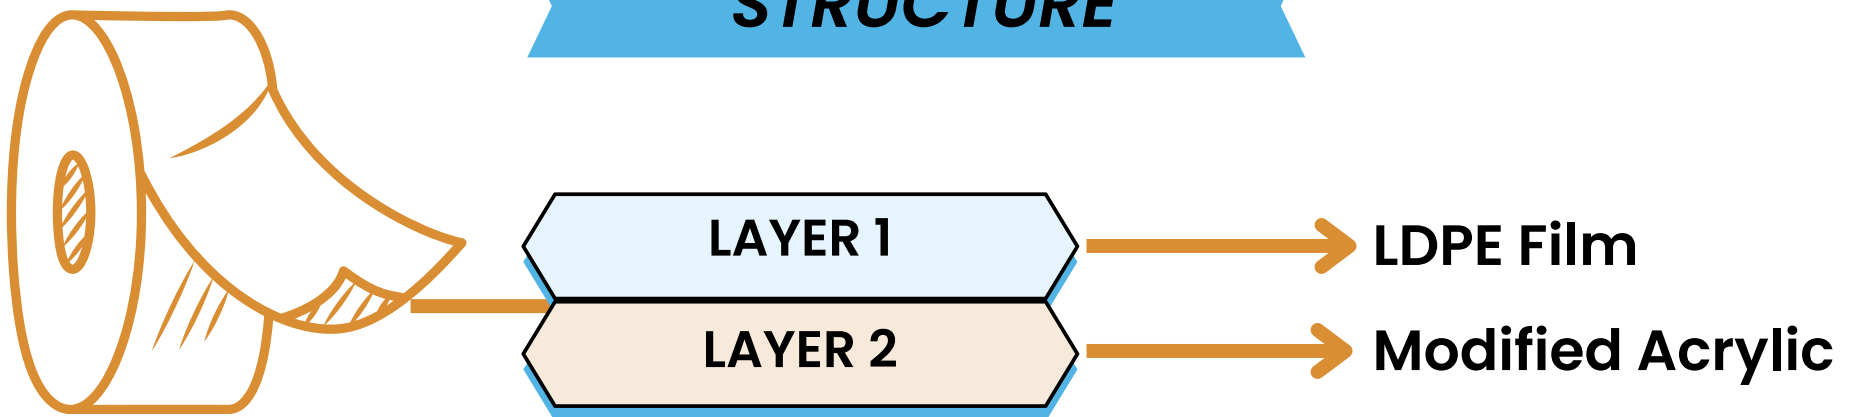

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
95NAT120P	Multi-Layer LDPE Film	95µ/3.8 mil	100-120 g/in	< 20 cm	7.8 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Transparent / Custom Colours	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters

FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off


APPLICATION



For construction sites & interior works



Suitable for Marble, Ceramics, Wood




CARPET PROTECTION TAPE

Carpet Protection Tape prevent carpets from gathering dirt and getting worn-out during manufacturing or transit

Special care has been taken to ensure carpet fabric threads do not come off when pulling the tape



STRUCTURE

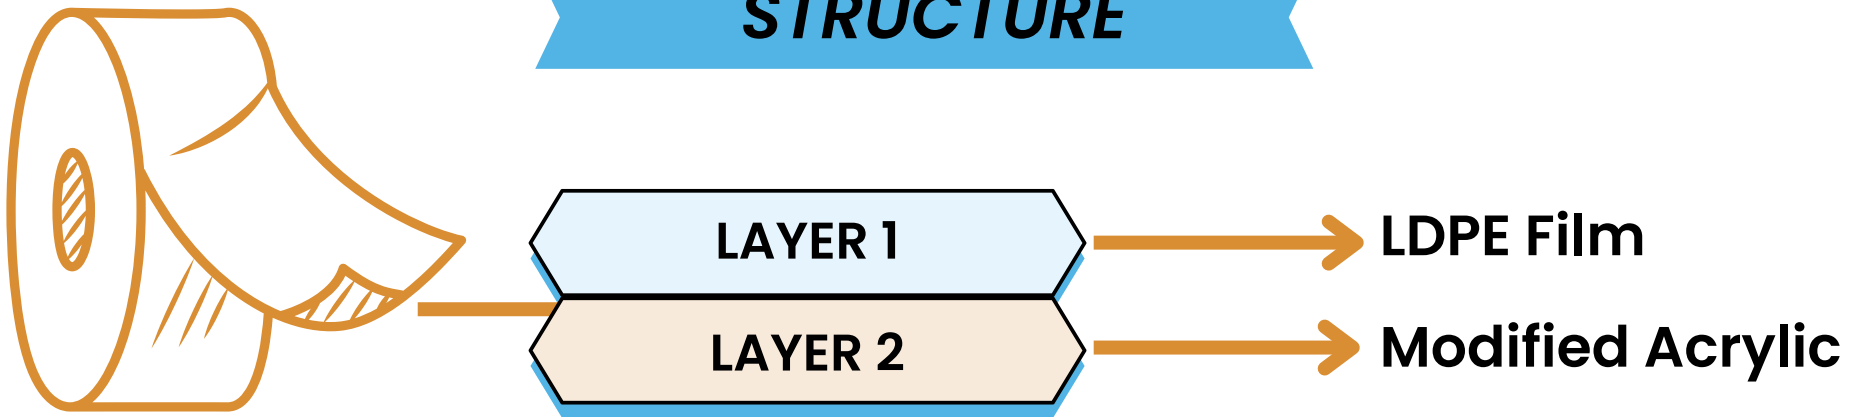

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
65NAT180P	Multi-Layer LDPE Film	66μ/2.64 mil	180-200 g/in	< 20 cm	5.05 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Transparent	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters


FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION



Protection of Carpets




ALUMINIUM PANEL PROTECTION TAPE

AL panel protection films are designed for UV resistance & weathering to protect sensitive surfaces during construction activities



STRUCTURE

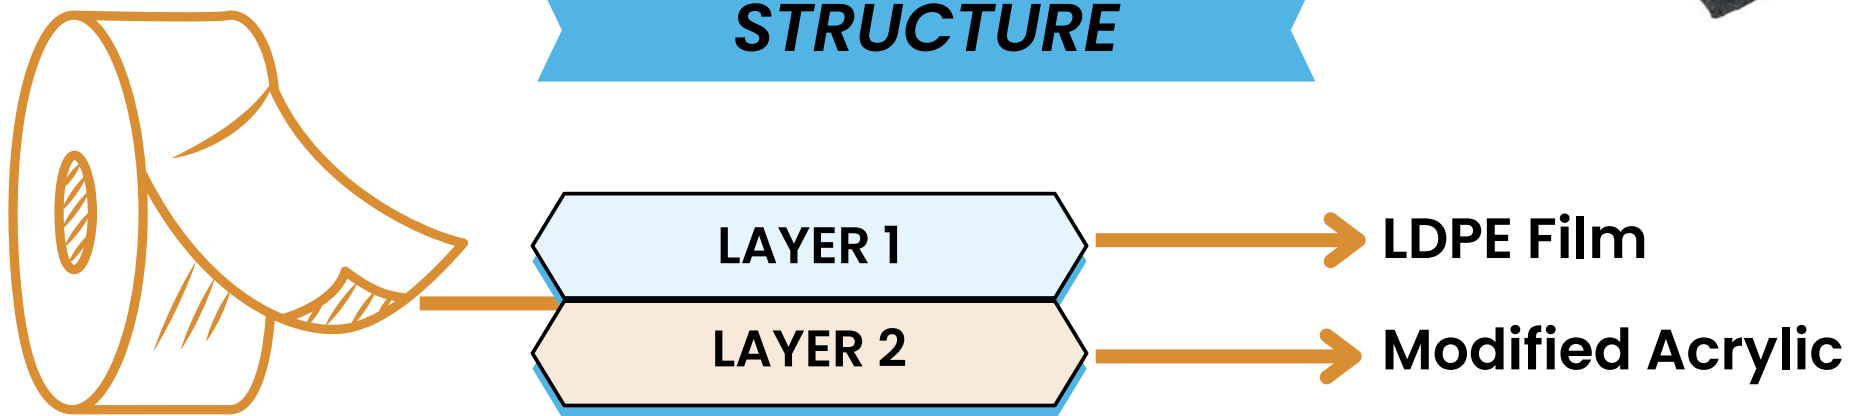

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40BW120P	Multi-Layer LDPE Film	41μ/1.64 mil	100-120 g/in	< 24 cm	3.1 kg/in	3 moths
40BW80P	Multi-Layer LDPE Film	41μ/1.64 mil	60-80 g/in	< 24 cm	3.1 kg/in	3 moths
65BW120P	Multi-Layer LDPE Film	66μ/2.64 mil	100-120 g/in	< 20 cm	5.05 kg/in	6 months
65BW80P	Multi-Layer LDPE Film	66μ/2.64 mil	60-80 g/in	< 20 cm	5.05 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Black & White	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters


FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION



Designed for use on anodized or powder-coated aluminum surfaces




LOW PEEL PROTECTION TAPE

Low Peel Protection Tape is developed for highly reactive metal and high gloss surfaces. They are generally applied high pressure to adhere to the surface easily



STRUCTURE

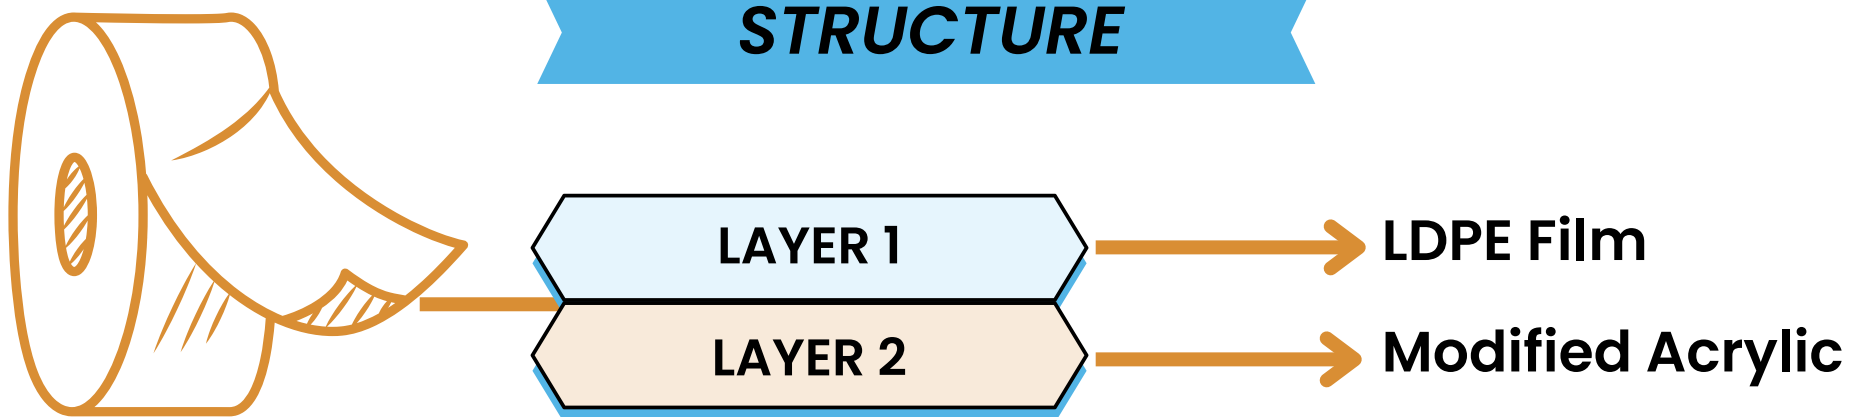

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40NAT40P	Multi-Layer LDPE Film	41μ/1.64 mil	40-60 g/in	< 24 cm	3.1 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Transparent or Custom Colours	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters


FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION



Used on coated surfaces where the tape is applied with very high pressure




LAMINATE PROTECTION TAPE

Laminate Protection Tape is used to protect Veneer, Ply, and Laminates

They are subjected to a lot of processing and transit, during which the surface must be protected from scratches and damages



STRUCTURE

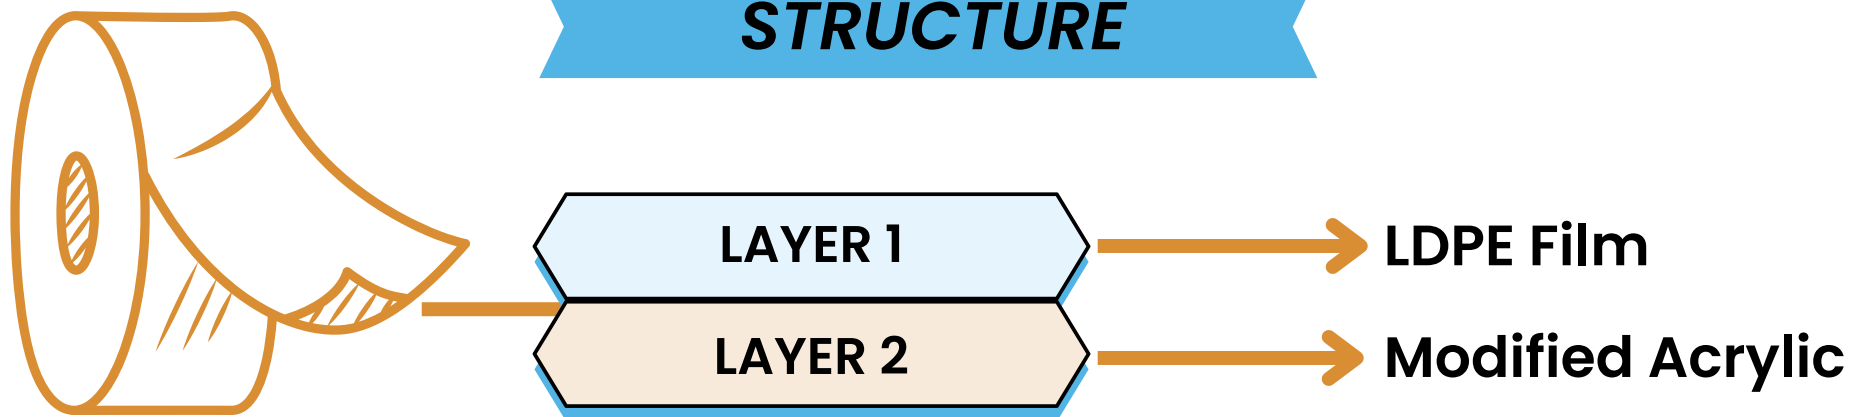

PERFORMANCE


Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40NAT120P	Multi-Layer LDPE Film	41μ/1.64 mil	100-120 g/in	< 20 cm	3.1 kg/in	6 months
50NAT120P	Multi-Layer LDPE Film	51μ/2.04 mil	100-120 g/in	< 20 cm	3.4 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Transparent or Custom Colours	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters

FEATURES


- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION




Used for protection of Veneer/Ply/Laminates

REINFORCED TAPES




Strong...Unbreakable...
Versatile...

Engineered for various applications, these tapes have high strength backings that can be used in Sealing, Packing and Bundling of the heaviest substances




DUCT TAPE

Duct Tape or Cloth Tape is a durable tape with sturdy backing. It is water resistant, strong, easy to tear, & a flexible tape. Very useful for quick repairs and fixes, that require a strong adhesive bonding.

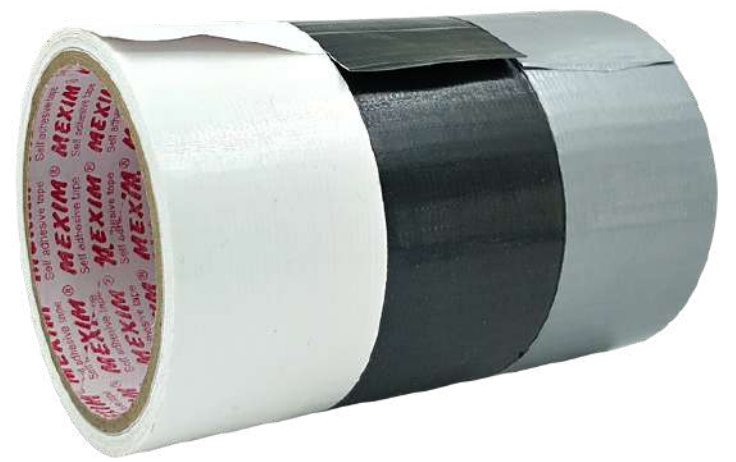

STRUCTURE

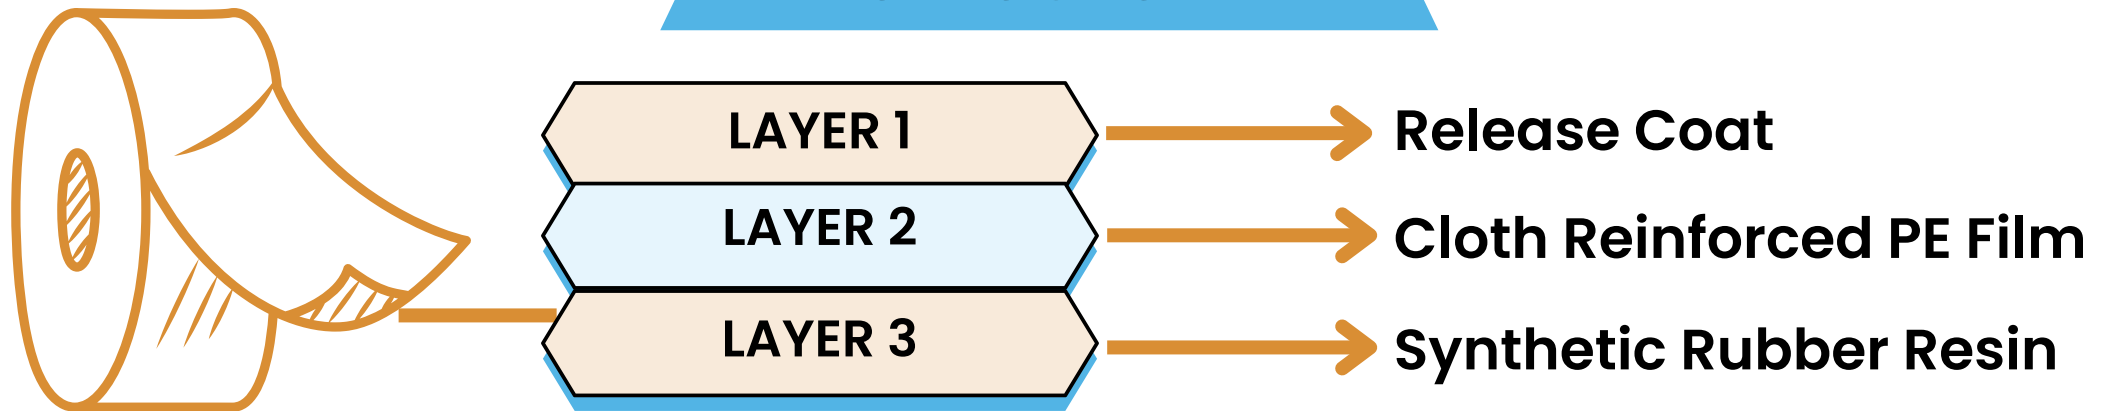

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DT130	PE Film + Reinforced Woven Cloth	130μ/5.2 mil	> 1500 mins	> 1200 g/in	12%	> 30 N/in	- 20° C to 60° C
DT150	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 1500 mins	> 1200 g/in	12%	> 55 N/in	- 20° C to 60° C
DT170	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 2000 mins	> 1500 g/in	12%	> 75 N/in	- 20° C to 60° C
DT230	PE Film + Reinforced Woven Cloth	150μ/5.6 mil	> 3000 mins	> 2000 g/in	12%	> 80 N/in	- 20° C to 60° C

Colours	Slit Material	Jumbo Rolls
Silver, Black, White, Red, Green, Dark Blue, Yellow	Width: 24 mm to 96 mm Length: 10 meters to 50 meters	Width: 1060 mm Length: 1500 meters

FEATURES

- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance

APPLICATION



Bundling & Packing of Heavy Objects



Pipe Wrapping & Carpet Fixing



HVAC Ducting – Seam and Joints sealing




CROSS FILAMENT TAPE

Cross Filament is a high tensile, cross-weaved reinforced tape. PET film is backed with fiberglass and coated with a synthetic rubber adhesive

The tapes have high adhesion, excellent resistance to break, and high safety in application



STRUCTURE

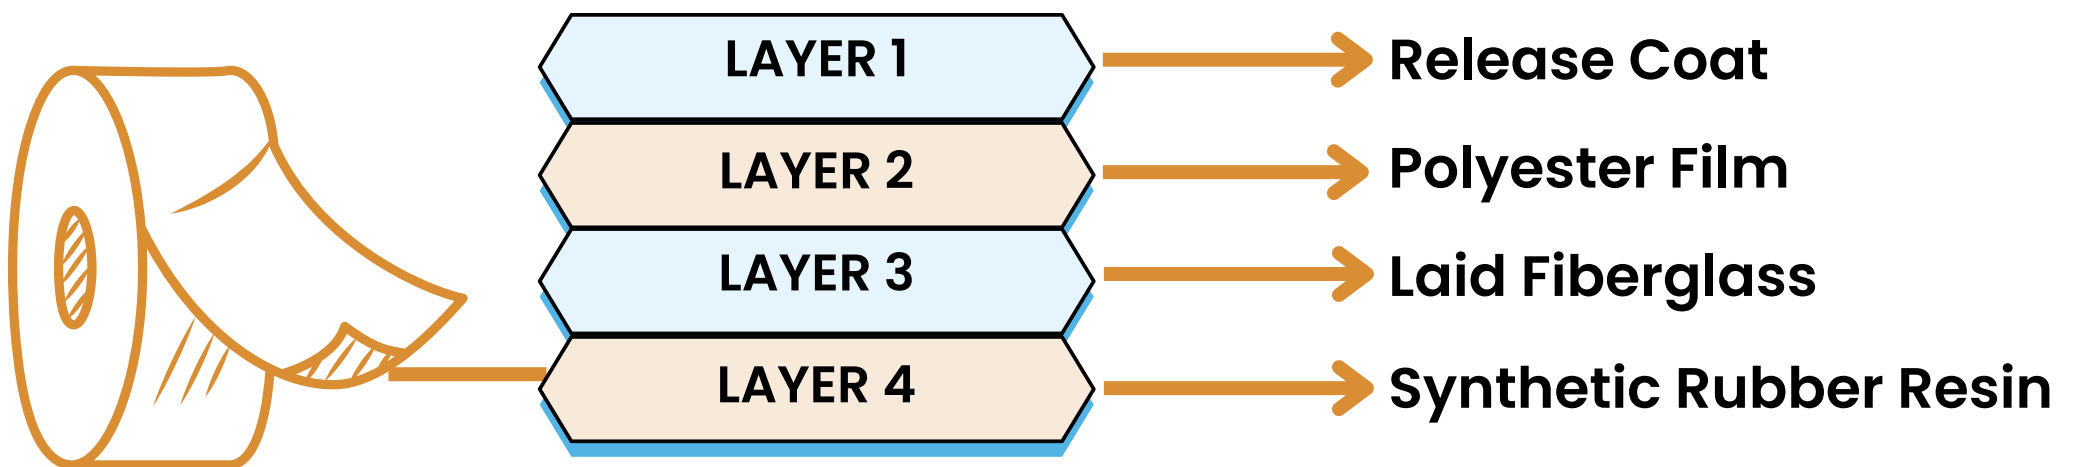

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
CFT140PTGF	Reinforced PET Film	140μ/5.6 mil	> 1500 mins	> 1850 g/in	12%	> 40 kg/in	- 5° C to 70° C

Colours	Slit Material	Jumbo Rolls
Transparent	Width: 24 mm to 72 mm Length: 20 meters to 50 meters	Width: 1060 mm Length: 1000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength


APPLICATION



Bundling of Heavy Objects like Pallets & Steel Coils



As a Bag-Tearing Tape




MONO FILAMENT TAPE

Mono Filament is a high tensile strength, mono-directional reinforced tape. PET film is backed with fiberglass and coated with a synthetic rubber adhesive.

The tapes have high adhesion, excellent resistance to break, and high safety in application



STRUCTURE

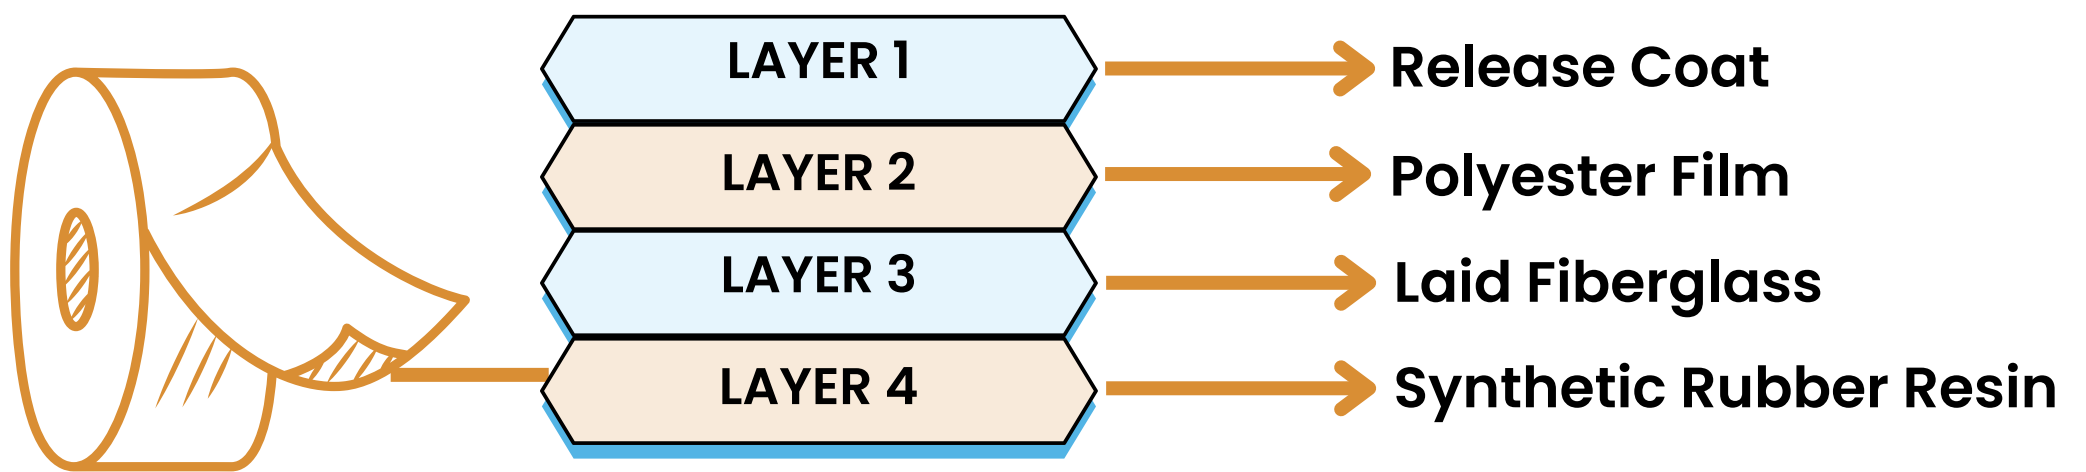

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
MFT120PPGF	Reinforced PET Film	120μ/4.8 mil	> 1500 mins	> 2350 g/in	5%	> 36 kg/in	- 5° C to 70° C

Colours	Slit Material	Jumbo Rolls
Transparent	Width: 24 mm to 72 mm Length: 20 meters to 50 meters	Width: 1060 mm Length: 1000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength

APPLICATION



Bundling of Heavy Objects like Pallets & Steel Coils



As a Bag-Tearing Tape




WOVEN HDPE FABRIC TAPE

HDPE Fabric Tape is made of cross-weaved fabric with a special grade of synthetic rubber adhesive



The tape adheres well to all surfaces and offer excellent strength

STRUCTURE

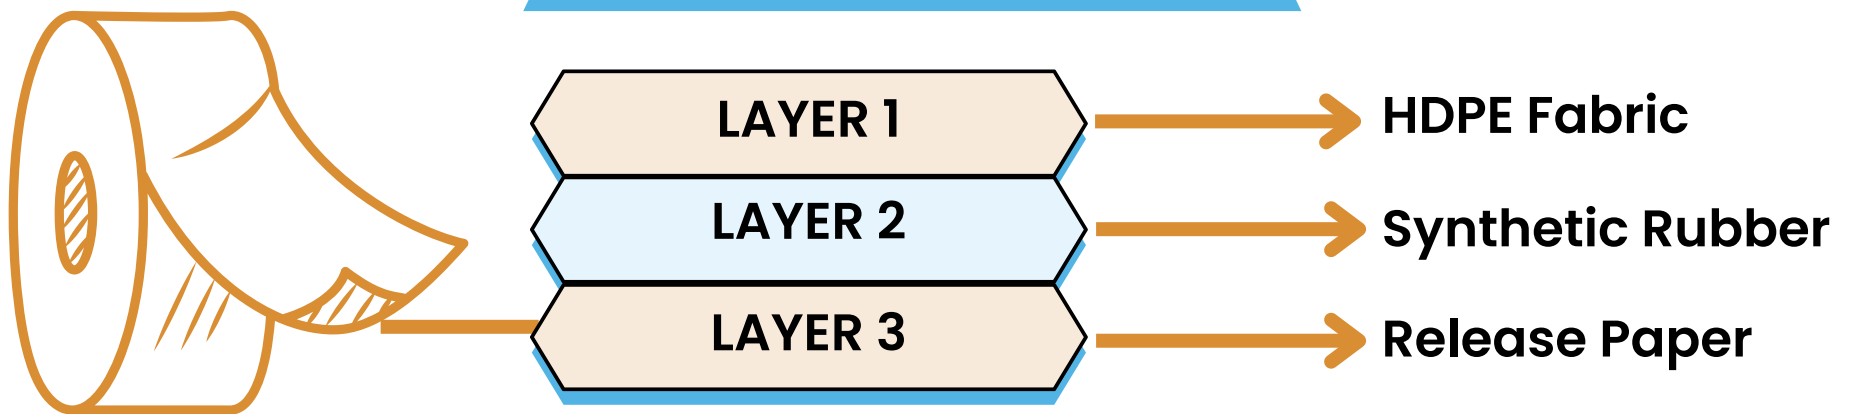

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
HDPE170	HDPE Fabric	170 μ /6.8 mil	> 1500 mins	> 2300 g/in	< 5%	> 70 N/in	- 20° C to 60° C

Colours	Slit Material	Jumbo Rolls
Black/White/Blue	Width: 24 mm to 96 mm Length: 20 meters to 50 meters	Width: 1010 mm Length: 750 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength

APPLICATION




Bundling & Packing of Heavy Objects & Cartons



Packing & Sealing HDPE Sacks


POLYESTER TAPES



***Any Time... Any Place...
Polyester Tape...***

Polyester Tapes (PET) are suited to various applications which require minimal thickness, high tensile strength, and resistance to aging and temperature

PET tape is used for technical and general-purpose splicing, bonding, protection, and masking applications




PET HOLDING TAPE

Polyester Holding Tape with a strong film and adhesive strength has easy applicability and removability

It can be used at room temperature and low to medium temperature holding applications



STRUCTURE

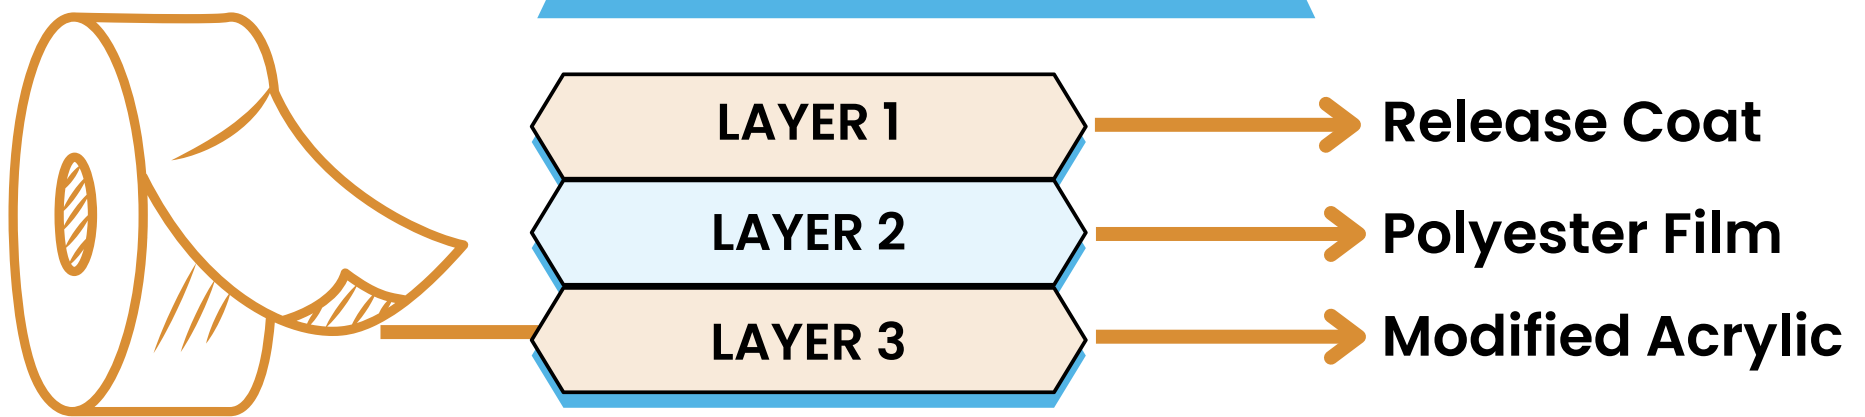

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
SSPETHT	PET Film	45µ/1.8 mil	> 3000 mins	> 6500 g/in	100%	> 6 kg/in	- 10° C to 60° C


Colours	Slit Material	Jumbo Rolls
Clear & Custom Colour	Width: 24 mm to 72 mm Length: 30 meters to 65 meters	Width: 1220 mm Length: 2000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Conformity on Irregular Surfaces
- High Resistance
- It has fast stick and good Tensile Strength

APPLICATION






DOUBLE SIDED POLYESTER TAPE

Double-Sided Polyester Tape is used for Medium to heavy duty splicing and mounting applications. Custom peel/shear available on both surfaces



STRUCTURE

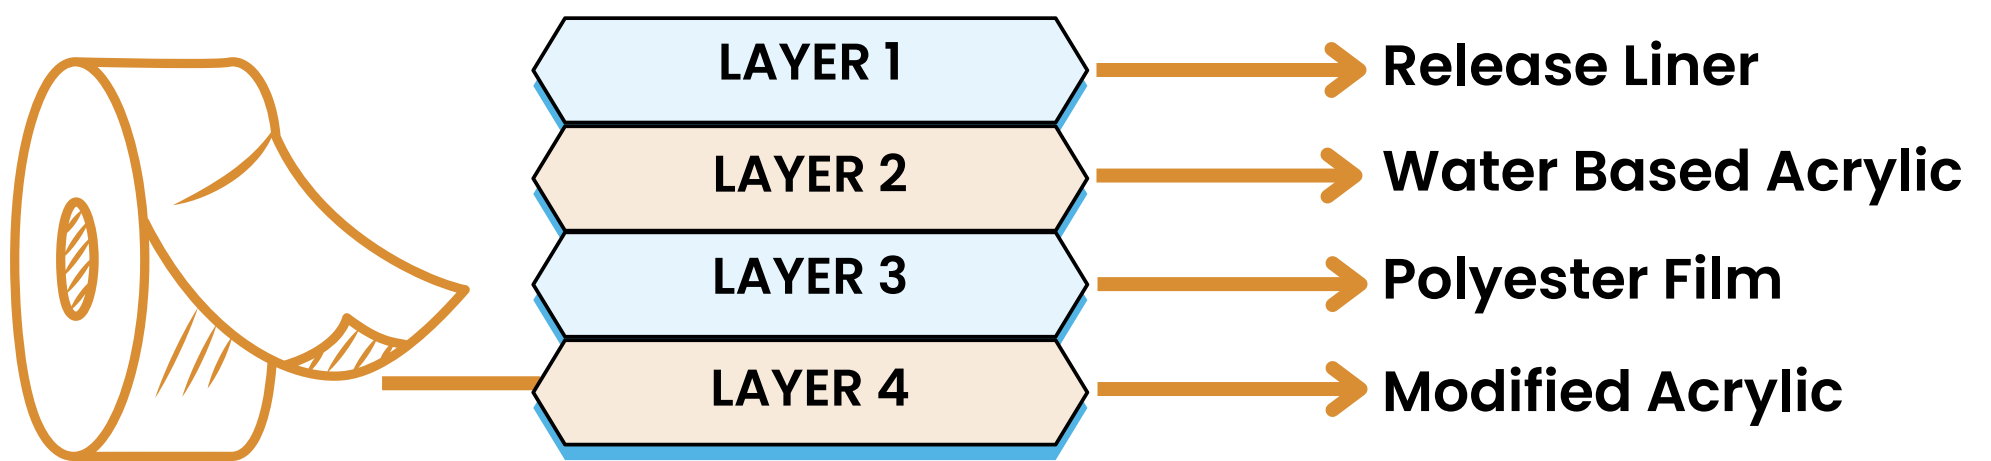

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DSPET254040	PET Film	110 μ /4.4 mil	> 2000 mins	> 1300 g/in	100%	> 6 kg/in	-10° C to 100° C

Colours	Slit Material	Jumbo Rolls
Clear & Red	Width: 24 mm to 72 mm Length: 30 meters to 65 meters	Width: 1220 mm Length: 2000 meters


FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Conformity on Irregular Surfaces
- High Resistance
- It has fast stick and good Tensile Strength

APPLICATION



Heavy Duty Splicing & Mounting Applications




RECYLED PLASTIC TAPE

Recycled PET tape contains over 85% Polyester from recycled PET bottles, creating a demand for recycling, which otherwise would spend 100s of years in landfills



Thinner tapes with increased strength and up to 20% lower plastic use per tape

STRUCTURE

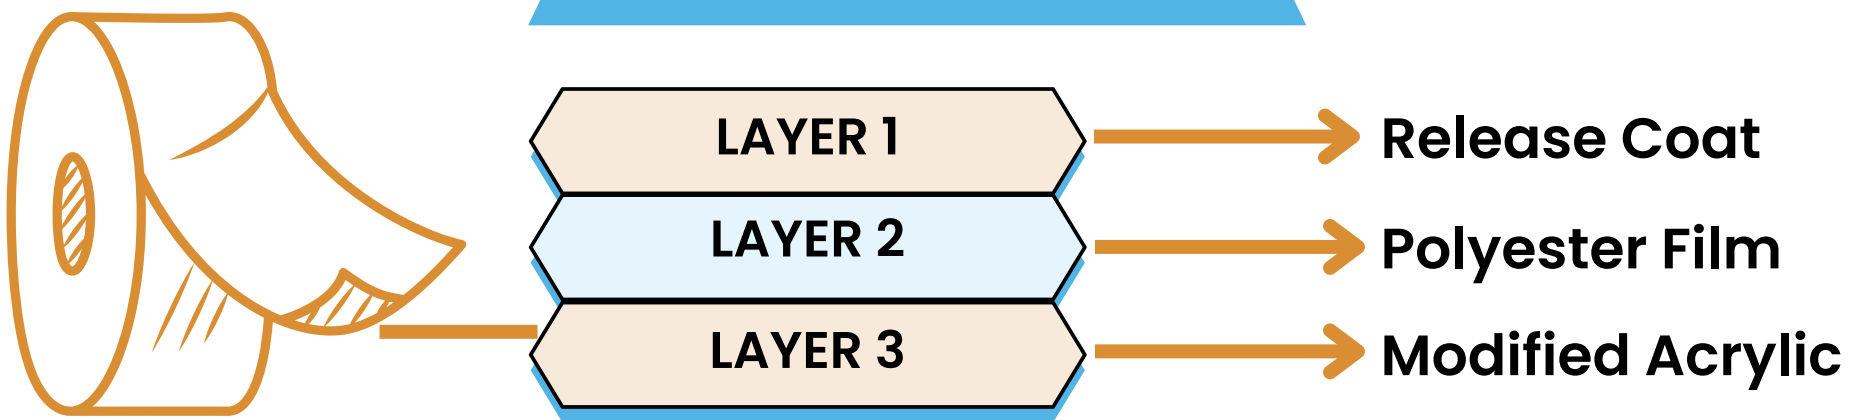

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
PCR12	PET Film	32µ/1.28 mil	> 2000 mins	> 600 g/in	100%	> 4 kg/in	- 10° C to 100° C
PCR18	PET Film	38µ/1.52 mil	> 2000 mins	> 600 g/in	100%	> 4.6 kg/in	- 10° C to 100° C

Colours	Slit Material	Jumbo Rolls
Clear & Custom Colour	Width: 24 mm to 72 mm Length: 30 meters to 2000 meters	Width: 1220 mm Length: 2000 meters

FEATURES

- 85% Post-Consumer Recycled (PCR) PET backing
- Offers excellent printability
- Suitable for manual and automatic dispensing

APPLICATION



Light-Medium Duty Packaging




General Bonding & Sealing

ALUMINIUM

FOIL


T A P E



Let the Aluminium Foil Tape do the Working!

Aluminum Foil Tapes perform marvelously under extreme cold or hot temperatures. They provide an excellent vapor barrier and easily conform to irregular surfaces

It is ideal for heat shielding, heat reflecting, chemical masking & HVAC operations




ALUMINIUM FOIL TAPE

Aluminum Foil Tape uses Aluminium Foil as backing material and is composed of one side with Acrylic Adhesive.

The tape possesses excellent Electric and Heat Conductivity



STRUCTURE

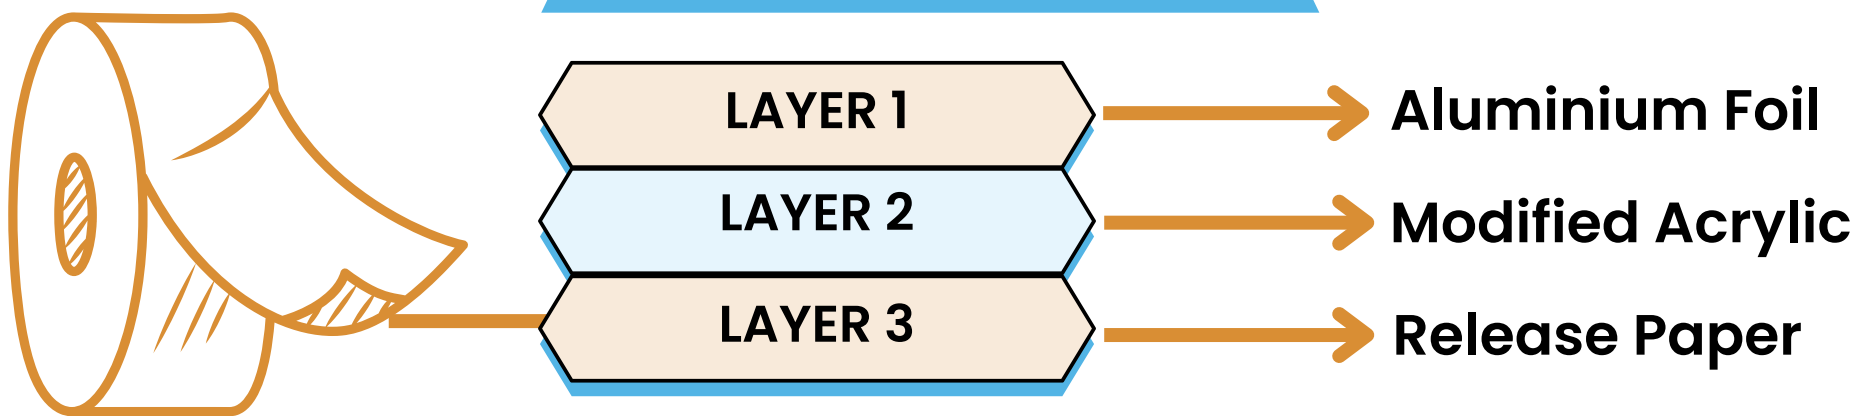

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Peel	Tensile	Temperature Resistance
ALU20LIN	Aluminium Foil	20μ	45μ/1.8 mil	> 550 g/in	> 3.6 kg/in	-10° C to 90° C
ALU30LIN	Aluminium Foil	30μ	55μ/2.2 mil	> 550 g/in	> 4.5 kg/in	-10° C to 90° C
ALU40LIN	Aluminium Foil	40μ	65μ/2.6 mil	> 550 g/in	> 6 kg/in	-10° C to 90° C

Colours	Slit Material
Silver	Width: 24 mm to 72 mm Length: 15 meters to 50 meters

FEATURES

- Very High Vapor Barrier
- Good Heat Conductivity
- Easy to Unwind and Tear
- Good Electrical Conductivity
- UV Resistant

APPLICATION



Sealing joints and seams of irregular metal surfaces



HVAC, refrigerator industry and metal patching



Shielding application for motors, cables, cabinets, antennae

MARKING & WARNING


TAPES



Marking & Warning Tape, Stays On & On & On....

Marking or Warning Tape is used across many industries in demarking areas & to catch the attention of the passersby

We offer our PVC Floor Marking Tape, Ultra Floor Marking Tape & PE Warning Tape




PVC FLOOR MARKING TAPE

Floor Marking Tapes are used for demarking areas in industrial and warehouse complexes

Designed to last long without damaging the floor, unlike paints. Can withstand heavy industrial movement



STRUCTURE

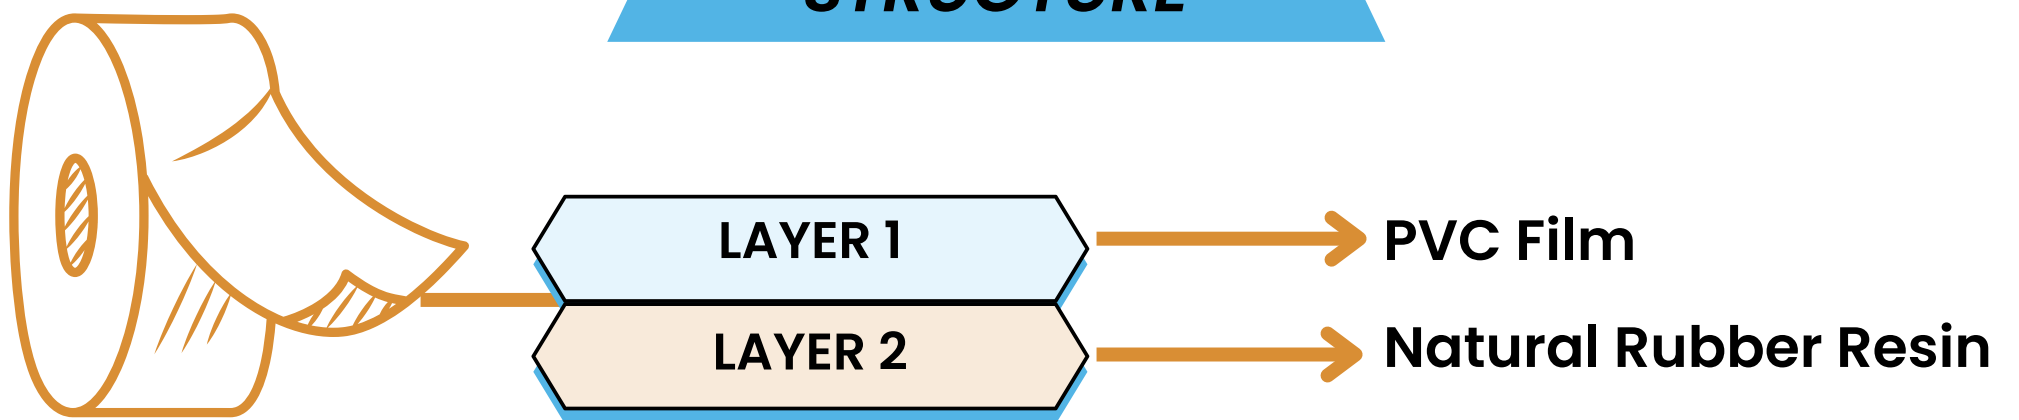

PERFORMANCE

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
FMT25150	PVC Film	150µ/6 mil	> 1100 gms	> 400 g/in	> 4.5 kg/in	100%	1 Year

Colours	Slit Material
Red, Yellow, Green, Blue, Blue, White, Red & White and Black & Yellow	Width: 36mm to 72 mm Length: 18 meters to 33 meters


FEATURES

- Can withstand heavy industrial movement
- Flexibility: Ultimate versatility
- No lifting or curling

APPLICATION



Demarking areas in industrial and warehouse complexes




ULTRA FLOOR MARKING TAPE

uFMT is 5x times stronger and 10x long-lasting. It is used for demarking areas in industrial and warehouse complexes

Designed to last long without damaging the floor, unlike paints. Can withstand heavy forklift traffic and industrial movements



STRUCTURE

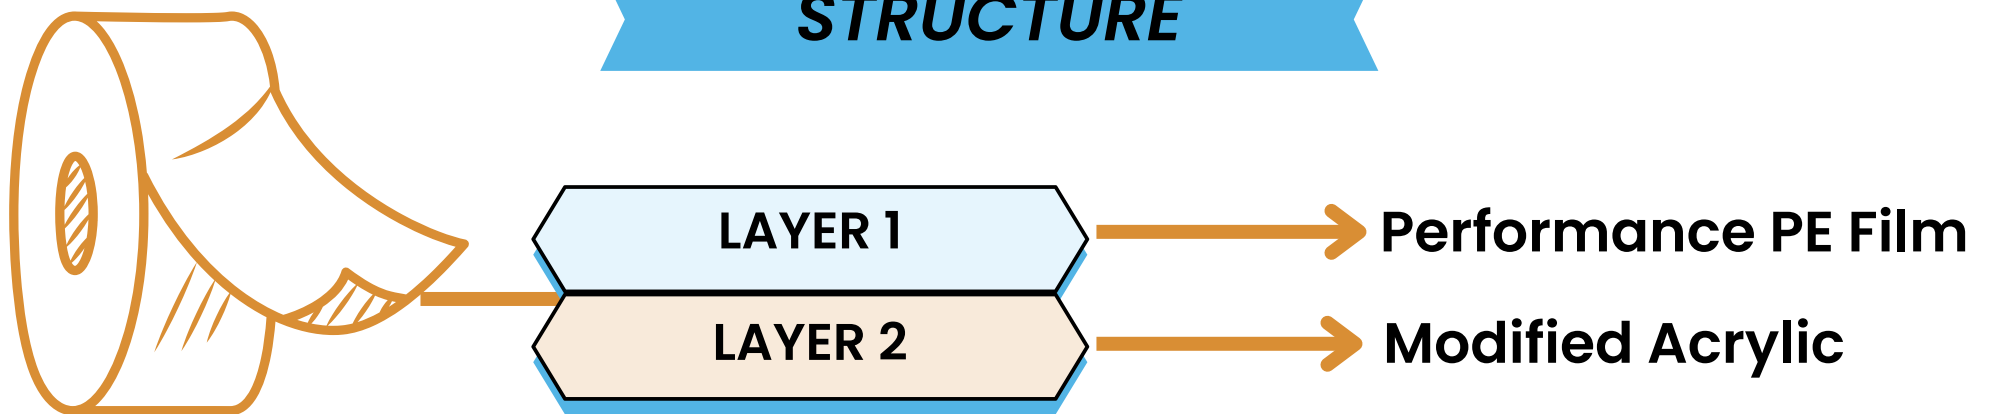

PERFORMANCE

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
uFMT12525	Performance PE Film	150µ/6 mil	> 1400 gms	> 500 g/in	> 5.5 kg/in	500%	10 Years


Colours	Slit Material
Red, Yellow, Green, Blue, Blue, White, Red & White and Black & Yellow & Custom Colours	Width: 36mm to 144 mm Length: 18 to 33 meters

FEATURES

- 5x times stronger & 10x long-lasting
- Can withstand heavy industrial movement
- UV Resistant
- Flexibility: Ultimate versatility
- No lifting or curling
- PVC Free

APPLICATION






WARNING TAPE

Warning tapes or Caution Tapes are used to warn or to catch the attention of passersby of an area possibly bearing danger or the situation containing any possible hazard to life



STRUCTURE

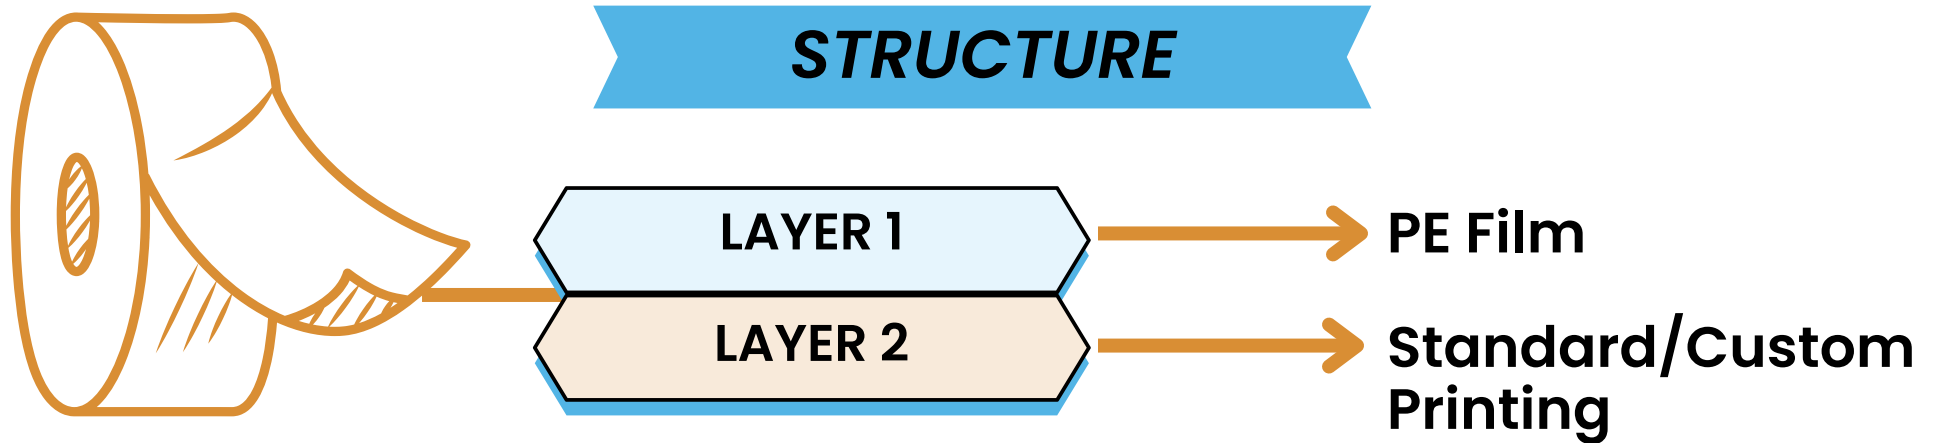

PERFORMANCE


Product Code	Backing	Total Thickness
PEWT25	PE Film	25µ/1 mil
PEWT30	PE Film	30µ/1.2 mil
PEWT40	PE Film	40µ/1.6 mil
PEWT70	PE Film	70µ/2.8 mil

Colours	Slit Material
Red & White, Black & Yellow & Custom Colours	Width: 70 mm to 100 mm Length: 100 meters to 1000 meters


FEATURES

- Warns and alerts pedestrians of danger in both small and large areas
- Signifies restricted access to hazardous areas
- Difficult to tear, hence providing additional security


APPLICATION




Marking at Construction Sites



Maintenance & Repair Operations



Irrigation and Mining Areas



Solar & Wind Power Facilities


ELECTRICAL INSULATION TAPES



***Safety First...Avoid the
Worst!***

Our Insulation Tapes guarantee high safety barrier for wires.

We offer PE Insulation Tape both in FR & Non-FR grades




inVOLT *Plus* PE Insulation Tape

World's first PE-based electric insulation tapes, have high elasticity, extreme elongation & higher electrical resistance (than pvc)



The tapes have a wide service temperature. They are ROHS-compliant, and are Fire Retardant!

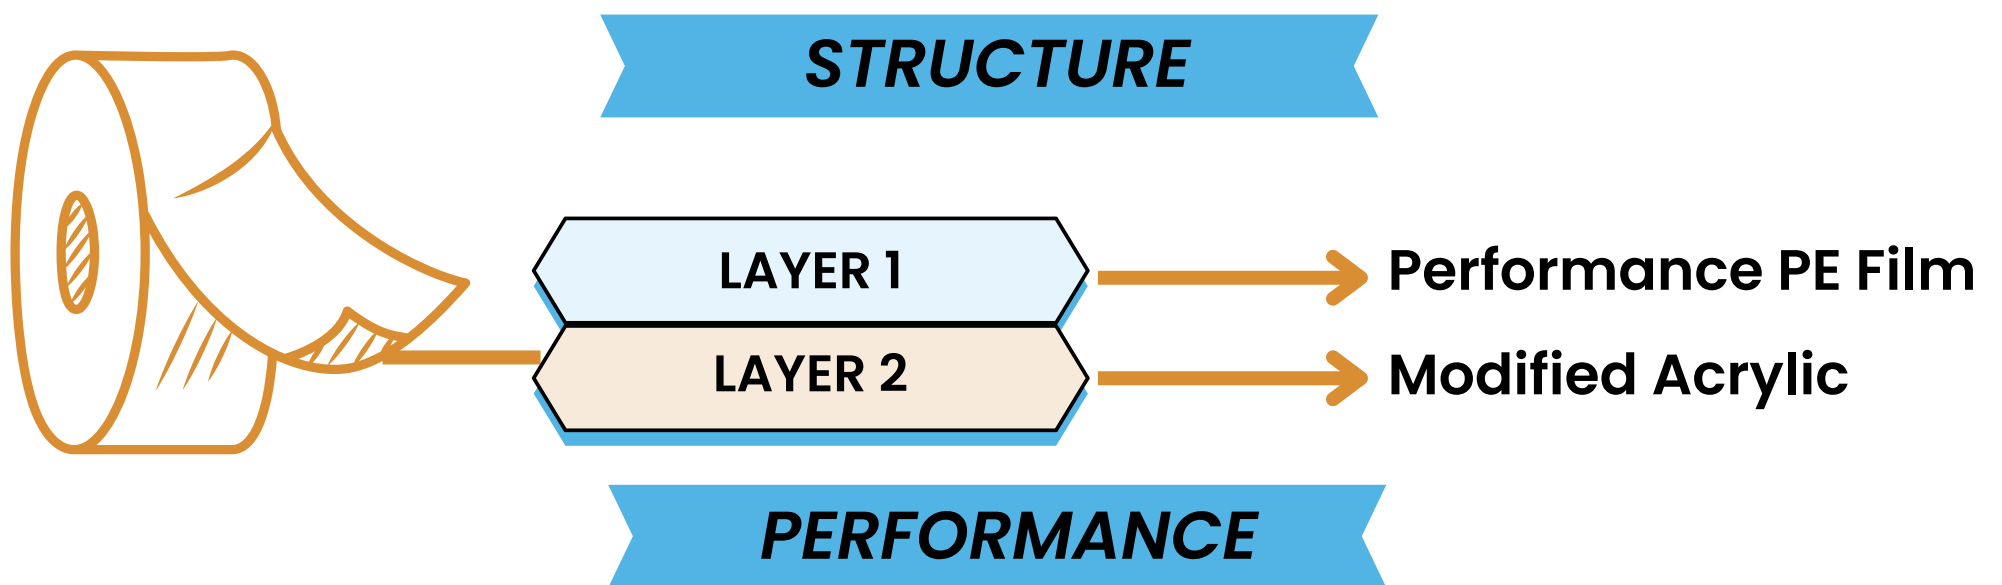

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Service Temperature
inVOLTPlus110	PE Film	110μ	> 8000	500%	5 Years	-20° C to 80° C

Colours	Slit Material	Log Roll
Black / Red / Green / Blue / Yellow / White & Orange	Width: 12 mm to 72 mm Length: 4 meters to 66 meters	Width: 1030 mm Length: 4 meters to 66 meters

FEATURES

- PVC Free
- High Conformability
- UV Resistant
- Strong Adhesion & Holding Power
- Excellent electrical and insulation properties


APPLICATION



For permanent joining/bonding for Wires and Cables



For protecting loose electrical wire ends




MX WONDER PE INSULATION TAPE

World's first PE-based electric insulation tapes, have high elasticity, extreme elongation & higher electrical resistance (than pvc)



The tapes have a wide service temperature. They are ROHS-compliant.

STRUCTURE

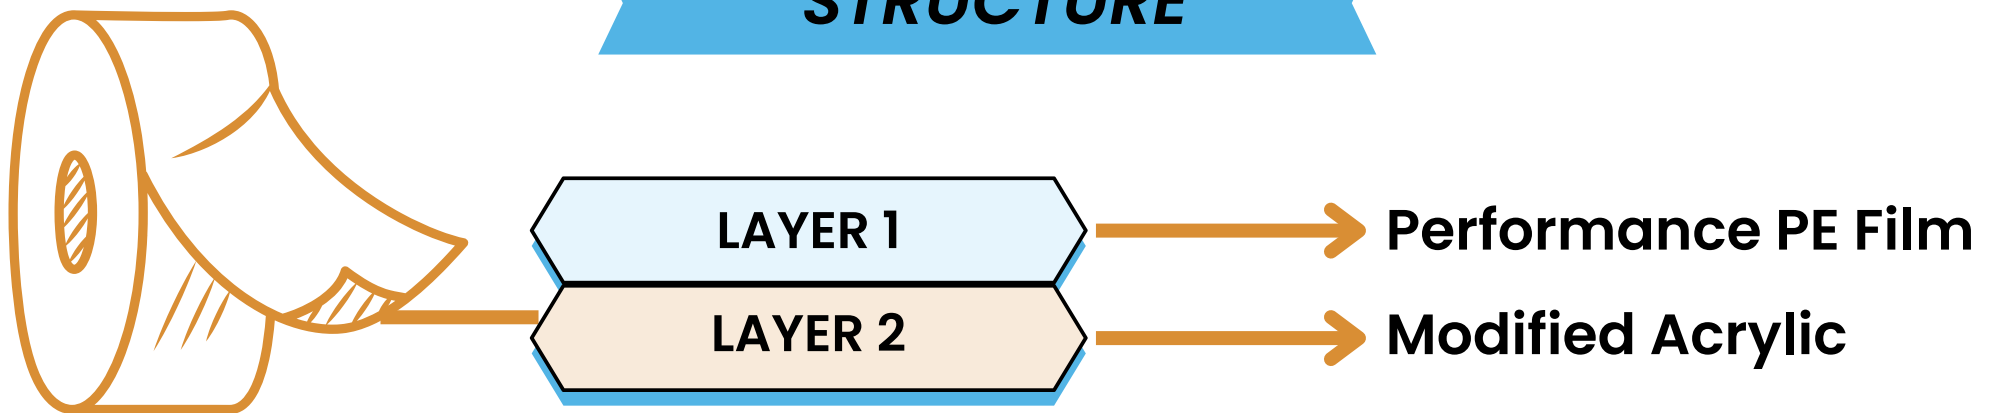

PERFORMANCE

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Service Temperature
Mxwon110	PE Film	110μ	> 8000	500%	1 Year	-20° C to 80° C

Colours	Slit Material	Log Roll
Black / Red / Green / Blue / Yellow / White & Orange	Width: 12 mm to 72 mm Length: 4 meters to 66 meters	Width: 1030 mm Length: 4 meters to 66 meters

FEATURES

- PVC Free
- High Conformability
- UV Resistant
- Strong Adhesion & Holding Power
- Excellent electrical and insulation properties
- Non FR Grade

APPLICATION



For permanent joining/bonding for Wires and Cables



For protecting loose electrical wire ends

SPECIAL APPLICATION TAPES



Special Application Tape! The Only Solution....

Our range of specialty tapes has been specially designed to provide the best results and performance for niche applications

The tapes are made with the finest quality backing material and adhesive for superior bonding and longevity




AIR VENTILATION TAPE

Air Ventilation Tapes are used during Foam Forming in Sandwich Panels of Metals, Composites, and Plastics

When applied on air-vents of a panel under which PU, PIR are being formed, it allows the hot air to pass through, providing a barrier to the foam liquid and solid



STRUCTURE

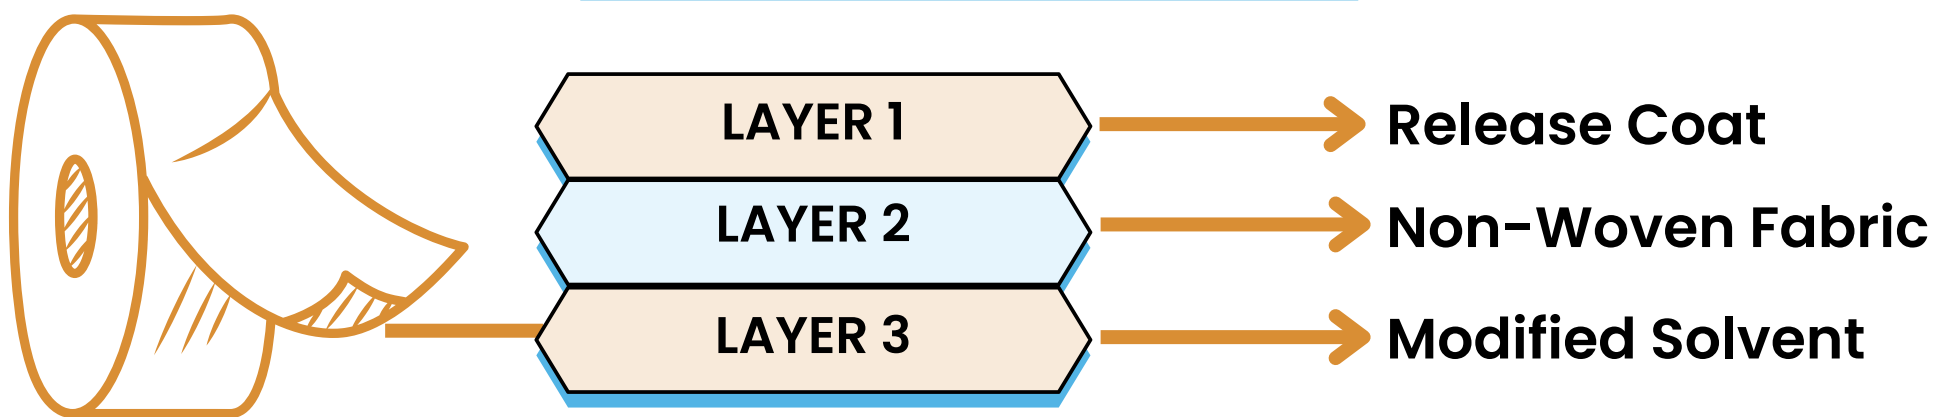

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Holding Power	Peel	Tensile
AVT160	Non-Woven Fabric	160 μ	< 12 cm	> 1000 mins	> 400 g/in	> 4 kg/in

Colours	Slit Material
White	Width: 12 mm to 300 mm Length: 33 meters to 66 meters

FEATURES

- Special porous backing allowing excellent permeability of high air/gases
- Pressure sensitive adhesive holds strong to a wide variety of surfaces

APPLICATION




PUF Panel Manufacturing



Insulated Doors/Cabinet



Coolers/Refrigerator Manufacturing




ALUMINIUM FLASHBAND BITUMEN TAPE

The ultimate solution for waterproofing and vapour barrier requirements

Ideal for application on concrete/brick/shingle roofing



STRUCTURE

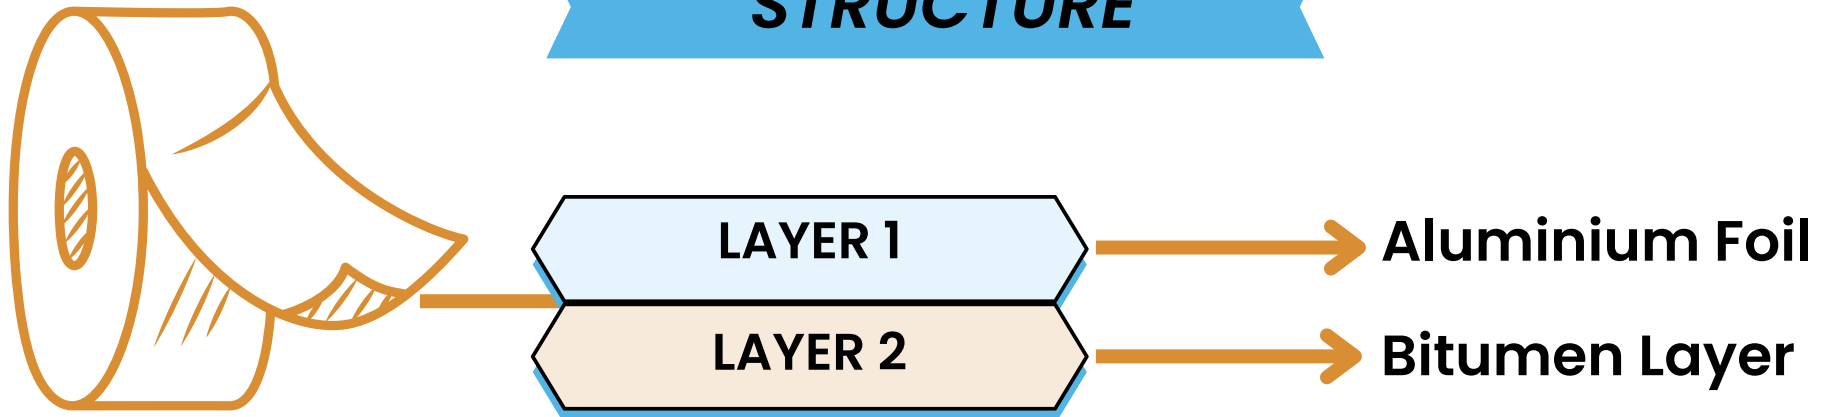

PERFORMANCE


Product Code	Backing	Total Thickness	Holding Power	Peel	Tensile
ALUFLASH	Bitumen	1.2 mm	> 6000 mins	> 2000 g/in	> 3.4 kg/cm

Colours	Slit Material	Jumbo Rolls
Black	Width: 36 mm to 320 mm Length: 5 meters to 15 meters	Width: 320 mm Length: 15 meters


FEATURES

- Glossy Aluminum backing – to reflect UV-radiation and provide low permeance
- High Resistance to Breaking Loads
- Excellent Heat Resistance
- Self Sealing
- Cold Application – No Flame, Heat, Primer Required
- Excellent Resistance to Acids, Mineral Salts & Corrosive Chemicals


APPLICATION




Shingle Roofing & Terraces




Terrace Underlayment



Renovation Work



Bathroom & Kitchen Underlayment




ABHEDYA BITUMEN TAPE

The ultimate solution for waterproofing and vapour barrier requirements

Ideal for application on concrete/brick/shingle roofing



STRUCTURE

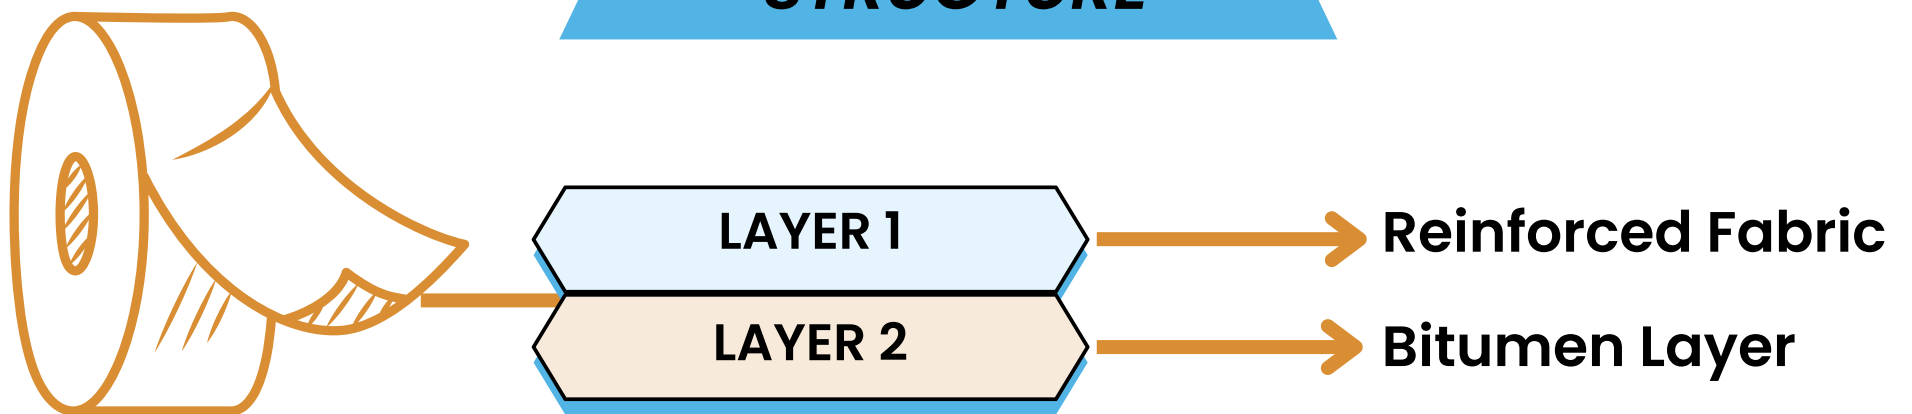

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Tensile
ABHEDYA	Bitumen	1.2 mm	> 6000 mins	> 2000 g/in	> 3.4 kg/cm

Colours	Slit Material	Jumbo Rolls
Black	Width: 36 mm to 300 mm Length: 5 meters to 15 meters	Width: 320 mm Length: 15 meters

FEATURES

- High Resistance to Breaking Loads
- Excellent Heat Resistance
- Self Sealing
- Cold Application – No Flame, Heat, Primer Required
- Excellent Resistance to Acids, Mineral Salts & Corrosive Chemicals

APPLICATION



Shingle Roofing & Terraces




Terrace Underlayment



Renovation Work



Bathroom & Kitchen Underlayment




PIPE WRAPPING TAPE

Pipe Wrapping Tapes are produced with our performance PE film and modified acrylic adhesive

The tapes are weatherproof, have good conformability, and are suitable for wrapping different kinds of pipes, both over ground and underground



STRUCTURE

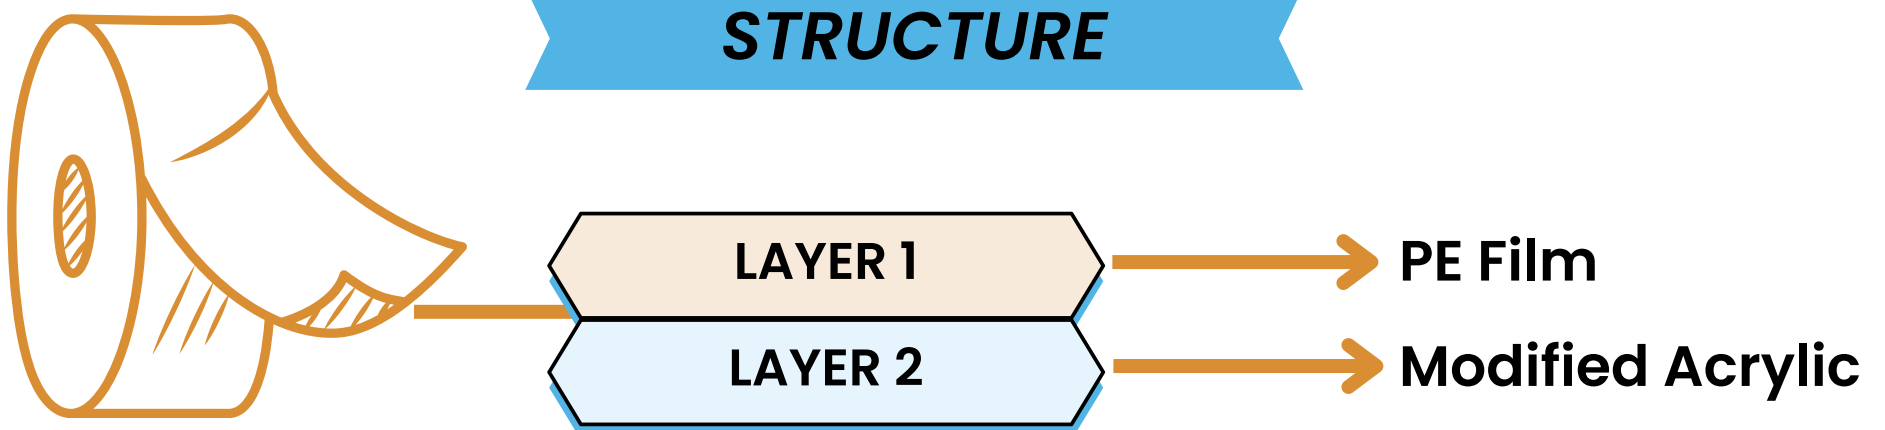

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Tensile	Elongation	Shelf Life
PWT	Performance PE Film	150μ	> 500 g/in	> 5.5 kg/in	> 500%	10 Years

Colours	Slit Material
Black, White & Multiple Colours	Width: 24 mm to 100 Length: 25 meters to 1000 meters

FEATURES

- Weatherproof and Corrosion resistance
- UV Resistant
- REACH/ RoHS compliant
- Superb Flexibility
- Strong Adhesion & Holding Power
- Excellent electrical and insulation properties

APPLICATION




To Protect Iron & Steel Pipe from Corrosion




To Protect electrical conduit & fittings from corrosion

NEW PRODUCT LINE

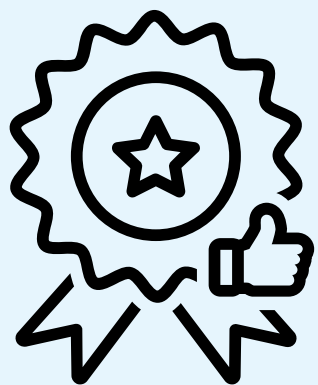

Expanding Horizons!!


Our competency in handling coating lines has encouraged us to introduce a new line of products which, is a step forward to becoming a single-point sourcing company for all your coating needs




POLYCOATED RELEASE LINERS

Mexim offers Poly-coated release liner solutions based on your specific applications. We offer upto 1300 mm width seamless release liners.

The silicone formulation is chosen based on the specific properties suitable to your applications. We develop the correct solution to match your production processes and end-uses

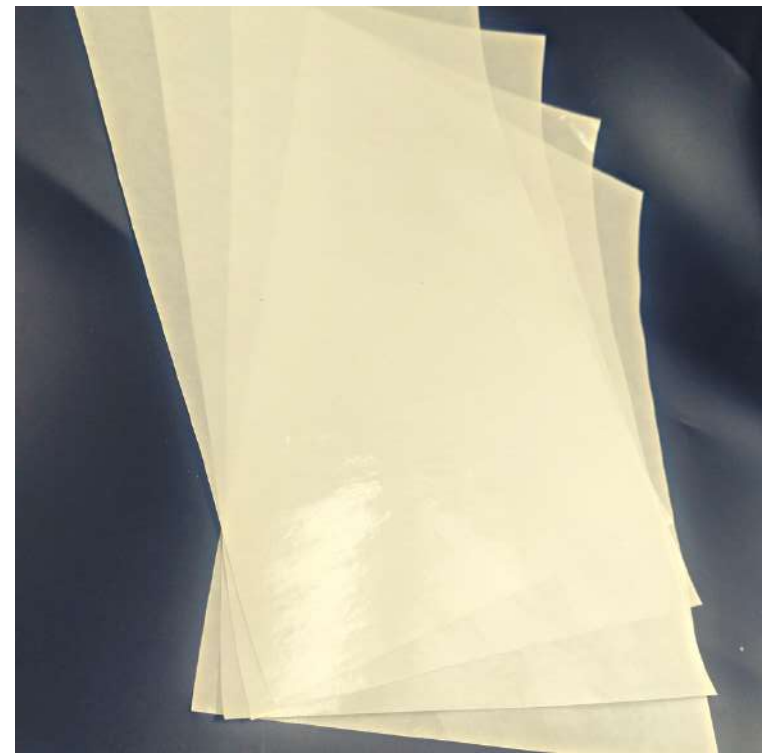

STRUCTURE

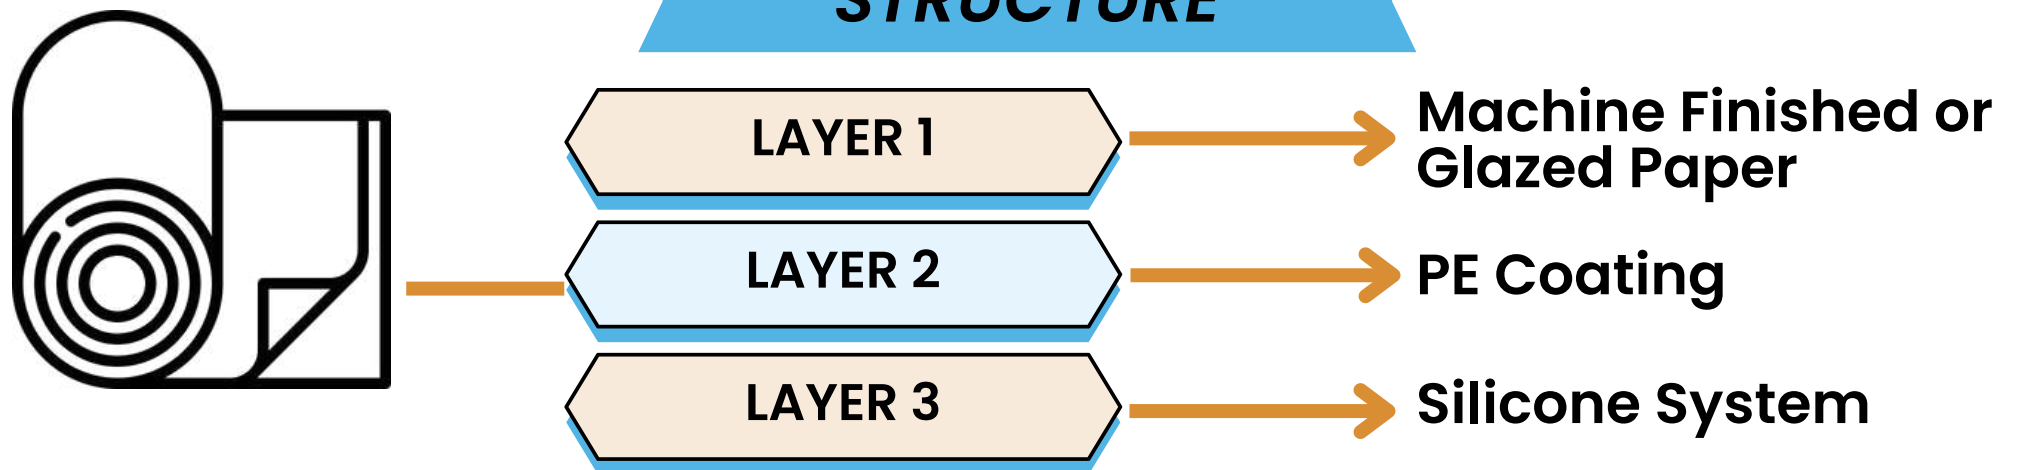

RELEASE COATING

- Premium, Easy and Modified release
- Single side and both Sides coating options

FEATURES

- Consistent release value
- Dimensional stability
- Surface smoothness
- Strong moisture barrier extrusion layer
- Good Lay flat performance under critical climatic conditions
- Comprehensive in-house printing up to 6 colours
- High strength

SPECIFICATIONS

Basic Weight	Width	Colour	Polymer
45 to 150 GSM	1300 mm / Slit coils	Custom (Backing Colour)	Low Density Polyethylene

APPLICATION

Graphic Art | Labels | Tapes | Envelops

PROTECTIVE PACKAGING



Protective Packaging..!! The Clever Way.....

Our Protective Packaging range protect your goods during transit and storage

It ensures that your product arrives in pristine condition without any damage or related problems.



GreenWrap



GreenWrap is a fantastic replacement for plastic bubble wrapping films. It cushions & protects fragile items during transit

Available Sizes:

380 mm x 100 meters (Expandable up-to 70%)
500 mm x 250 meters (Expandable up-to 70%)

Thickness: 80 GSM **Colours:** Brown & White

GreenFill




GreenFill is used for filling void spaces in shipping box. It prevents the items inside the box from moving or breaking

Available Size:

380 mm (Perforated Side) x 280 mm
Standard Length: 260 meters

Thickness: 80 GSM **Colours:** Brown



Stretch Film



Made from LDPE, Stretch Film is used to protect and secure furniture, boxes & pallets


Thickness: 9µm - 70µm

Widths: 50 mm to 2000 mm

Colours: Clear & Custom Colours

Grades: Manual & Machine Grade

DISPENSERS

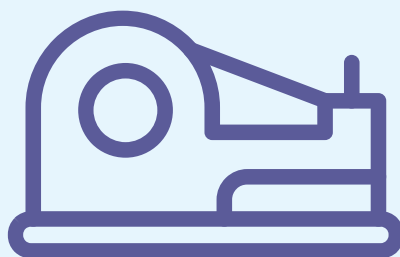

Things go Faster with Dispensers.....

Dispensers are used in several sectors, especially in industry and packaging

Dispensers improve efficiency across the assembly, manufacturing, and packaging lines, saving companies time and money


Mini Tape Desktop Dispenser

Features:

- Easy to Use
- Cost Effective

Applications:

- For general sealing at home & offices



Colours: Yellow, Red, Blue, Green, White



Handy Tape Dispenser

Features:


- Easy to Use
- Sturdy Design

Applications:

- For box sealing at offices and industries



Colours: Yellow, Red, Blue, Green, White

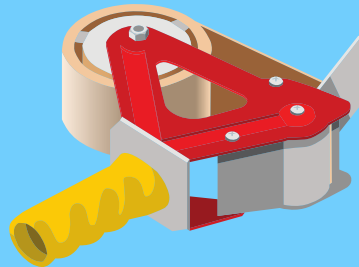


GreenWrap Dispenser

Features:

- Compatible with up to 500 mm rolls
- Suitable for all core ID's
- Adjustable tension mechanism for a smoother usage

Applications:

- For easy dispensing and stretching of honeycomb paper



GreenFill Dispenser

Features:

- Adjustable knob at the bottom to fix the dispenser on any tabletop
- Easy to assemble and carry
- A simple to pull and use dispenser


Applications:

- For easy & effortless dispensing of the greenfill paper

MAKE IT EASY



WATER ACTIVATED TAPE DISPENSERS

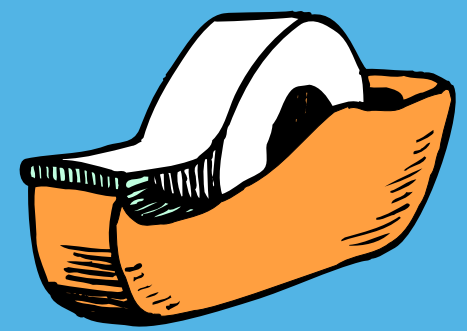

Manual Table-Top Dispenser



PROPERTIES:

- Compatible tape widths: 24 mm to 75 mm
- Suitable with both plain & reinforced tapes
- Compact Size & Easy Mobility
- Cost Effective

Dimensions (L x W x H) – 33 cm x 10 cm x 13 cm, Weight – 0.58 Kgs

Semi-Automatic Dispenser



PROPERTIES:

- Compatible tape widths: 40 mm to 75 mm
- Tape length:
- Suitable with both plain & reinforced tapes
- Hand lever for smooth & quick dispensing
- Increased efficiency & productivity

Dimensions (L x W x H) – 45 cm x 27 cm x 24 cm, Weight – 9.5 Kgs







Fully-Automatic Dispenser



PROPERTIES:

- Compatible tape widths: 40 mm to 75 mm
- Tape length: 38 cm to 270 cm
- Suitable with both plain & reinforced tapes
- Automatic buttons for quickest dispensing
- Provides best efficiency & productivity

Dimensions (L x W x H) – 50 cm x 33 cm x 30 cm, Weight – 13 Kgs



CONTACT US

Reach us at



www.mexim.in



marketing@mexim.in
sales@mexim.in



Domestic:

+91 9377705962 / +91 9574745962




International:

+91 9904099007 / +91 9324210120

Follow us on Social Media



[meximadhesivetapes](#)



[meximadhesivetapes](#)



[Mexim Adhesive Tapes](#)



[meximadhesive](#)

Locations

Head Office:

309/3, Gokul
Arcade-A, Subhash
Road, Vile Parle
East, Mumbai
400057, India

Unit 1:

Survey No 351/1,
D & E, Kachigam
Village, Daman -
396210, India

Unit 2:

Plot No.1, Survey No.
215/1
Dadra- 396230,
India





MEXIMM