

MEXIM

ADHESIVE TAPES PVT. LTD.

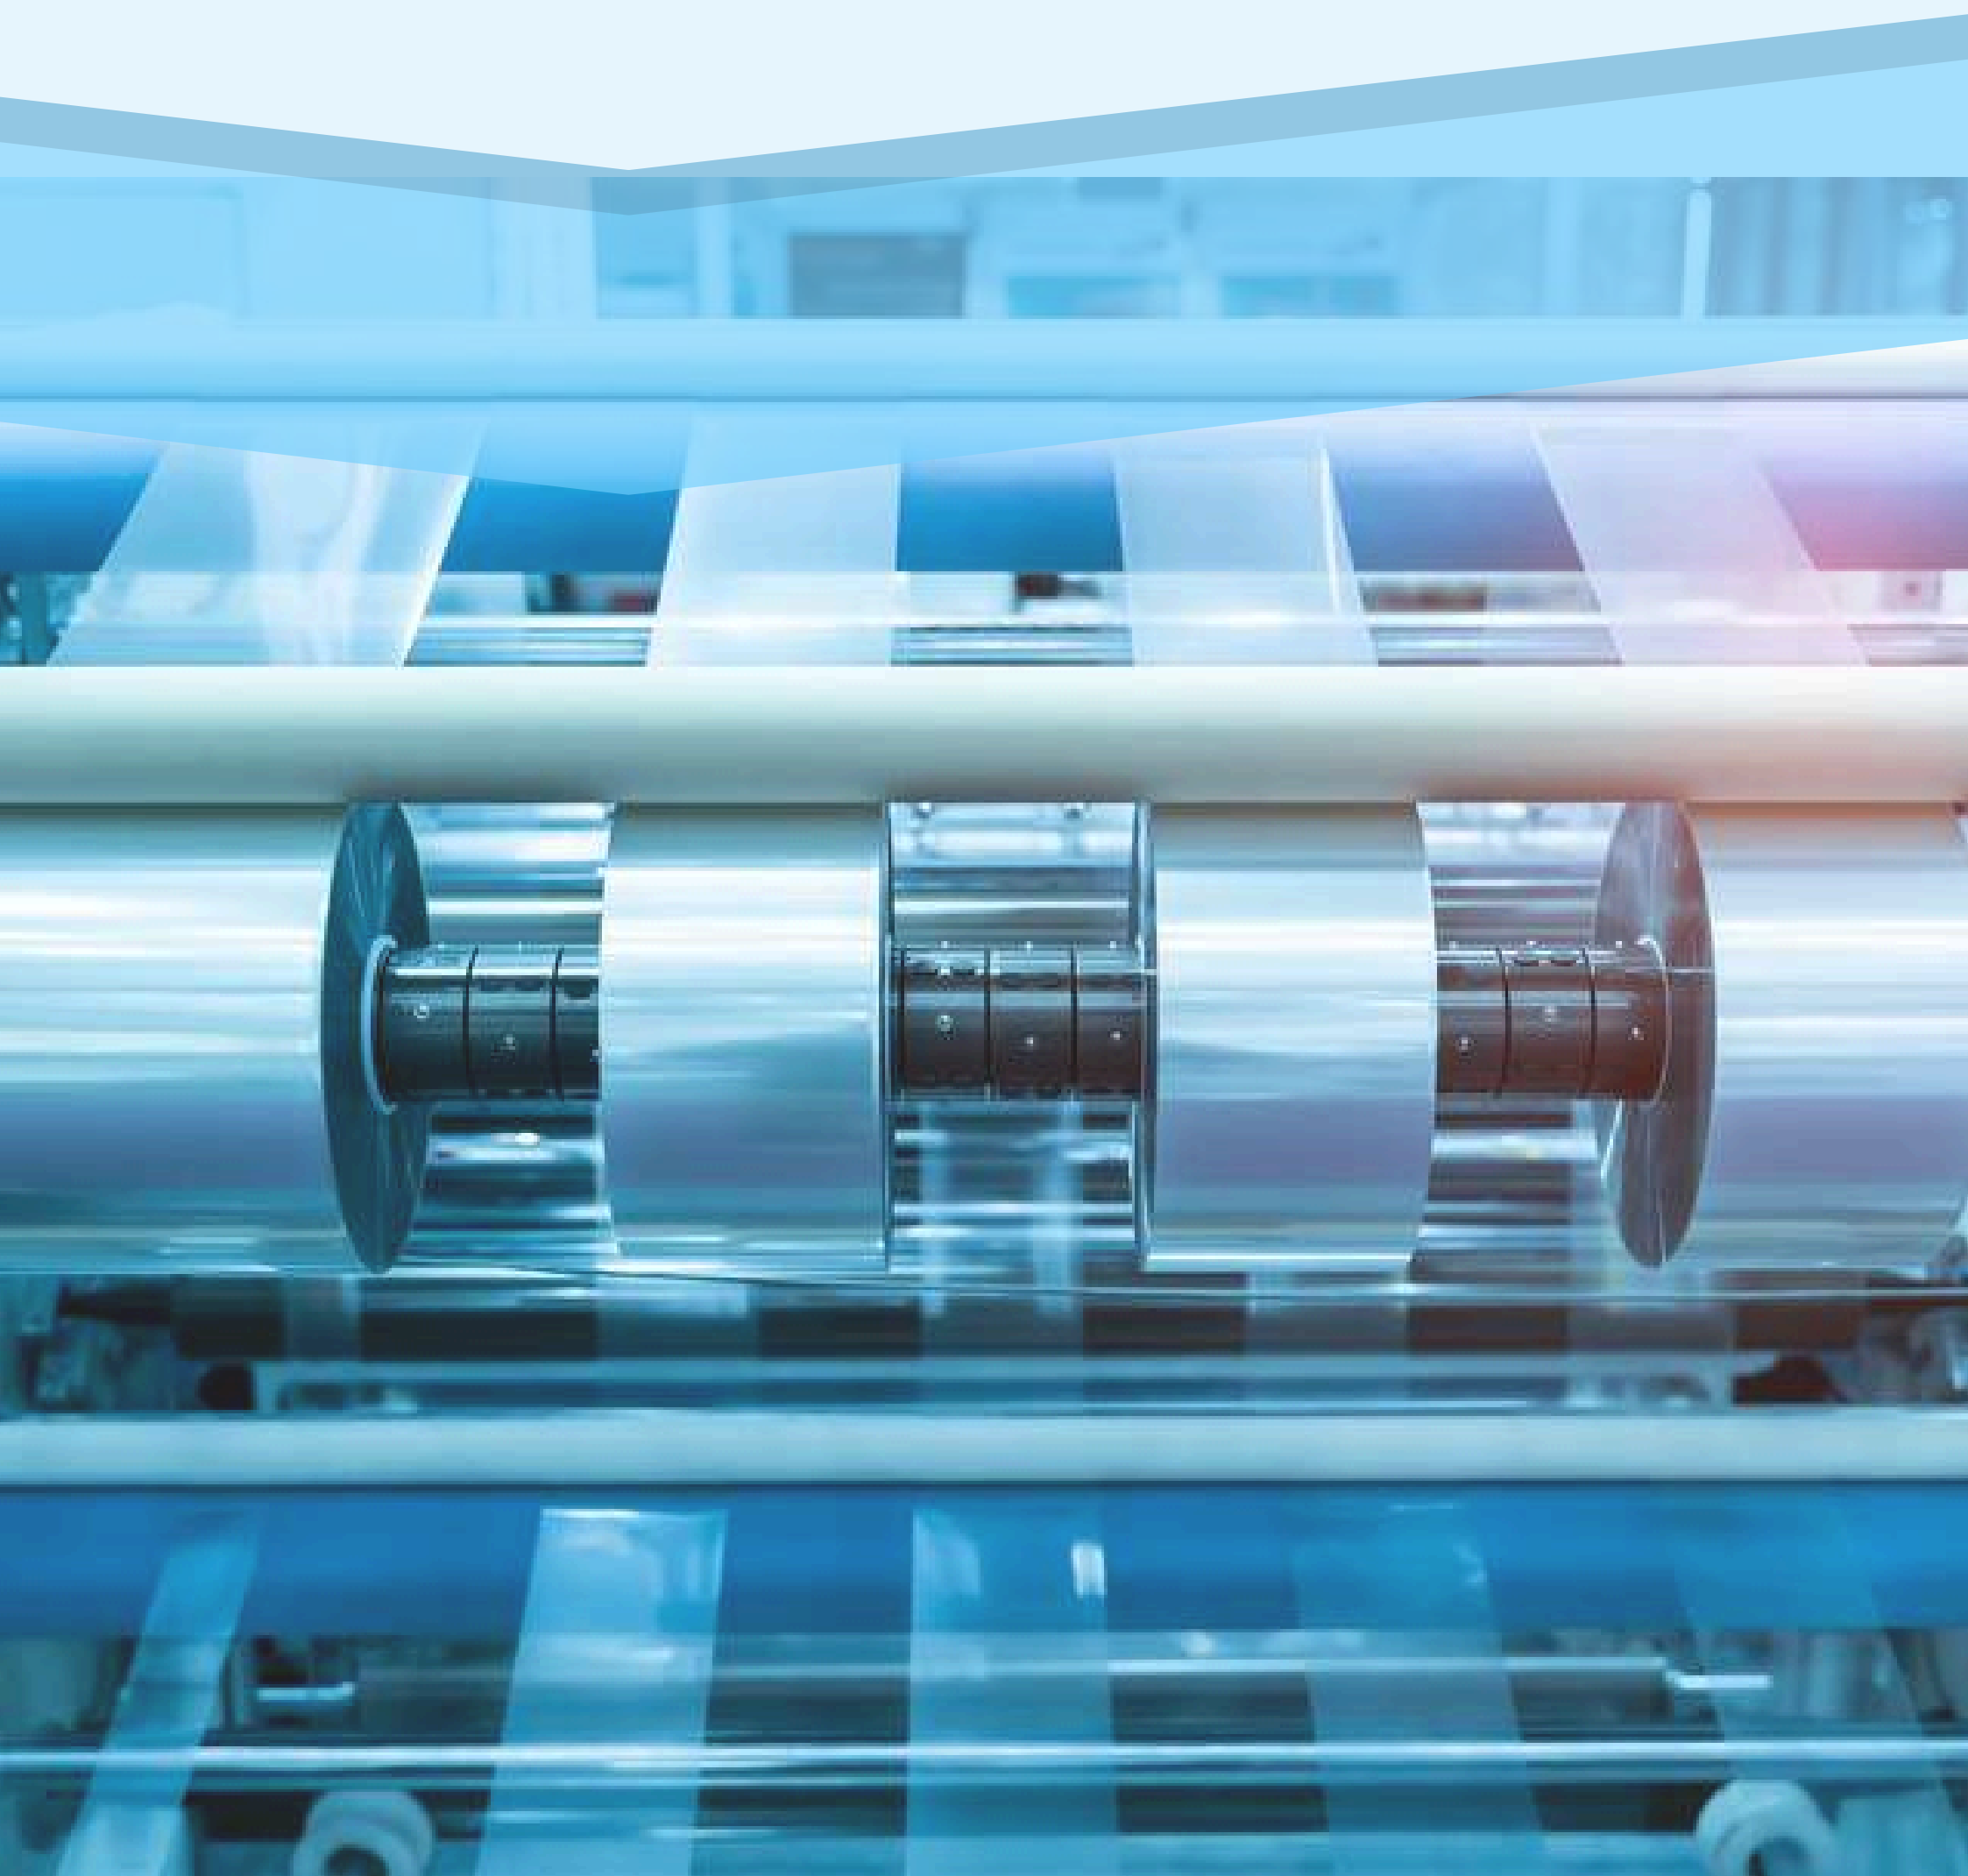


TABLE OF CONTENTS

I. INTRODUCTION

About Us	5
Milestones	6

II. BOPP TAPES

Packaging Tape	8
Printed BOPP Tape	10
Low & No Noise Tape	11
Machine Roll	12
Packaging Tape Hot Melt	13
Super Clear BOPP Tape	14
Invisible Tape	15
Metallized BOPP Tape	16
BOPP Freezer Tape	17
Shelf Strip Tape	18
Neck Sealing Tape	19
PP Book Binding Tape	20
Finger Lift Tape	21
Clean Removal BOPP Tape	22
Self Adhesive Lamination Film	23

III. TISSUE TAPES

DS Tissue Tape Hot Melt	25
DS Tissue Tape Solvent Based	26
DS Tissue Tape Acrylic	27

IV. PAPER PACKAGING TAPES

Self Adhesive Kraft Paper Tape	29
Reinforced Self Adhesive Paper Tape	30
Crepe Paper Packaging Tape K6142	31
Standard Water Activated Tape	32
Reinforced Water Activated Tape	33

TABLE OF CONTENTS

<u>V. MASKING TAPES</u>	34
General Purpose Masking Tape K6143	35
Outdoor Masking Tape PXL6035	36
Automotive Masking Tape PXL7515	37
Fine Line Masking Tape P5030	38
PE Fine Line Masking Tape	39
<u>VI. FOAM TAPES</u>	40
Gasket Tape	41
Spacer Foam Tape	42
Eva Foam Insulation Tape	43
Double Sided Mounting Tape	44
Double Sided Acrylic Foam Tape	45
<u>VII. SURFACE PROTECTION TAPES</u>	46
Surface Protection Tape - Full Range	47
Aluminium Panel Protection Tape	49
SPF Printing Grid	50
<u>VIII. REINFORCED TAPES</u>	51
Duct Tape	52
Cross Filament Tape	53
Mono Filament Tape	54
HDPE Fabric Tape	55
<u>IX. POLYESTER TAPES</u>	56
PET Holding Tape	57
Double Sided Polyester Tape	58
Polyimide Tape	59
Mylar Tape	60
Recycled Plastic Tape	61

TABLE OF CONTENTS

<u>X. ALUMINIUM FOIL TAPE</u>	62
Aluminium Foil Tape	63
Alu-PET Tape	64
FSK Tape	65
Alu-Glass Tape	66
<u>XI. MARKING & WARNING TAPES</u>	67
Ultra Floor Marking Tape	68
PVC Floor Marking Tape	69
Anti-Skid Tape	70
Warning Tape	71
<u>XIII. SPECIAL APPLICATION TAPES</u>	72
inVOLT Plus PE Insulation Tape	73
PE Insulation Tape - Wire Harness	74
MOPP Tape	75
Air Ventilation Tape	76
Void Security Tape	77
Nano Tape	78
Butyl Tape	79
Pipe Wrapping Tape	80
PE Freezer Tape	81
Drywall Jointing Tape	82
Acetate Cloth Tape	83
PTFE Fiberglass Tape	84
<u>XV. PROTECTIVE PACKAGING</u>	85
<u>XVI. DISPENSERS</u>	86

ABOUT US

- Head Office in Mumbai
- 2 Factories covering 74,000 SQ. FT. production area
- India's only tape factory with a dedicated R&D facility
- State of the art printing, coating & packing equipments
- CAGR $\geq$ 20% since 2005
- Quality Compliance - ISO 9001:2015
- Environmental compliance - ISO 14001:2015
- Social Compliance - SMETA 4 Pillar
- More than 2000 direct customers in India
- Exports to more than 20 countries across FOUR continents
- Specializing in OEM and private label manufacturing
- In-house experts customizing retail shelf ready packaging for your tapes



INFRASTRUCTURE

- 8 Coating Lines
- 4 Printing Machines
- 1 SPF Coating Machine
- 18 Slitting Machines
- 3 Slicing Machines
- 1 R&D Coating Line

MILESTONES

- **1987** Establishment year
- **1995** First manufacturing unit established in Daman
- **1996** One of India's first exporters of adhesive tapes
- **2000** Moved to larger 14000 SQFT unit in Daman
- **2008** Expanded BOPP tape production capacity to 500 MT/month
- **2014** Installed a new gen multi-purpose coating line
- **2016** Setup dedicated R&D coating line for adhesive tapes
- **2017** 1 Star Export house certified by Govt of India
- **2018** Recognized Authorized Economic Operator (AEO) by Govt of India
- **2020** Established 2nd manufacturing unit in Dadra further doubling our BOPP tape capacity
- **2020** State-of-the-art converting machines installed with high automation
- **2022** 2 Star Export house certified by Govt of India
- **2024** Expansion into sustainable packaging tapes with dedicated coating and converting for Gummed Paper Tapes
- **2025** Backward integration into adhesive manufacturing and establishment of dedicated adhesive R&D lab




BOPP TAPES



***Something for
Everyone....***

*The most widely used packaging and stationery
tapes. We offer a wide range of standard and
customized packaging tapes*






PACKAGING TAPE



Mexim’s Packaging Tape is used from light to heavy duty sealing/packing of corrugated boxes for shipping and storing.

It combines extra tear resistance with ultra-strong adhesion for better endurance

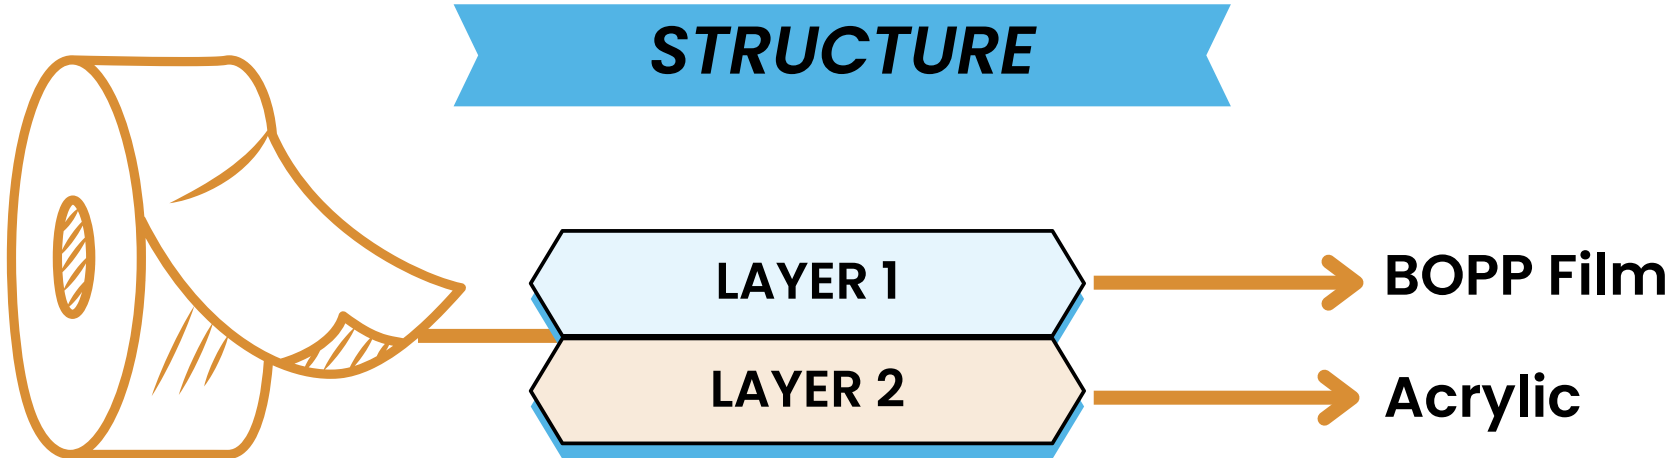

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SATBOPP2313	BOPP Film	23µ	36µ/1.44 mil	< 13 cm	> 1000 mins	> 600 g/in	> 2.8 kg/cm
SATBOPP2315	BOPP Film	23µ	38µ/1.52 mil	< 12 cm	> 2000 mins	> 600 g/in	> 2.8 kg/cm
SATBOPP2317	BOPP Film	23µ	40µ/1.6 mil	< 12 cm	> 3000 mins	> 600 g/in	> 2.8 kg/cm
SATBOPP2320	BOPP Film	23µ	43µ/1.72 mil	< 8 cm	> 5000 mins	> 600 g/in	> 2.8 kg/cm
SATBOPP2322	BOPP Film	23µ	45µ/1.8 mil	< 7.5 cm	> 5000 mins	> 650 g/in	> 2.8 kg/cm
SATBOPP2520	BOPP Film	25µ	45µ/1.8 mil	< 7.5 cm	> 5000 mins	> 650 g/in	> 3.2 kg/cm
SATBOPP2523	BOPP Film	25µ	48µ/1.92 mil	< 7 cm	> 5000 mins	> 650 g/in	> 3.2 kg/cm
SATBOPP2921	BOPP Film	29µ	50µ/2 mil	< 7 cm	> 5000 mins	> 650 g/in	> 3.4 kg/cm
SATBOPP2926	BOPP Film	29µ	55µ/2.2 mil	< 6.5 cm	> 5000 mins	> 700 g/in	> 3.4 kg/cm
SATBOPP3728	BOPP Film	37µ	65µ/2.6 mil	< 6 cm	> 5000 mins	> 700 g/in	> 4.2 kg/cm
SATBOPP5025	BOPP Film	50µ	75µ/3 mil	< 6 cm	> 5000 mins	> 750 g/in	> 4.8 kg/cm
SATBOPP5030	BOPP Film	50µ	80µ/3.2 mil	< 6 cm	> 5000 mins	> 750 g/in	> 4.8 kg/cm

Colours	Slit Material	Jumbo Rolls	Small Jumbo Rolls
Transparent/ Brown/White/ Custom Colours	Width: 9 mm to 100 mm Length: 3 meters to 2000 meters	Width: 1025 mm to 1610 mm Length: 4000 - 8000 meters	Width: 144, & 288 mm Length: 2000 meters

FEATURES

- **Our all standard packaging tapes are High Shear**
- Cost Effective
- Good Tensile Strength
- Long Shelf Life
- Ageing Resistant
- Strong OPP Film
- Easy to apply on variety of surfaces

APPLICATION



Bonding



Joining




Sealing




Heavy Duty Packaging

PRODUCT ADD-ONS


- **Easy Tear Tapes (Hand Tearable)** – can be easily cut or torn by hand, without the use of scissors, blades, cutters, or tape dispensers

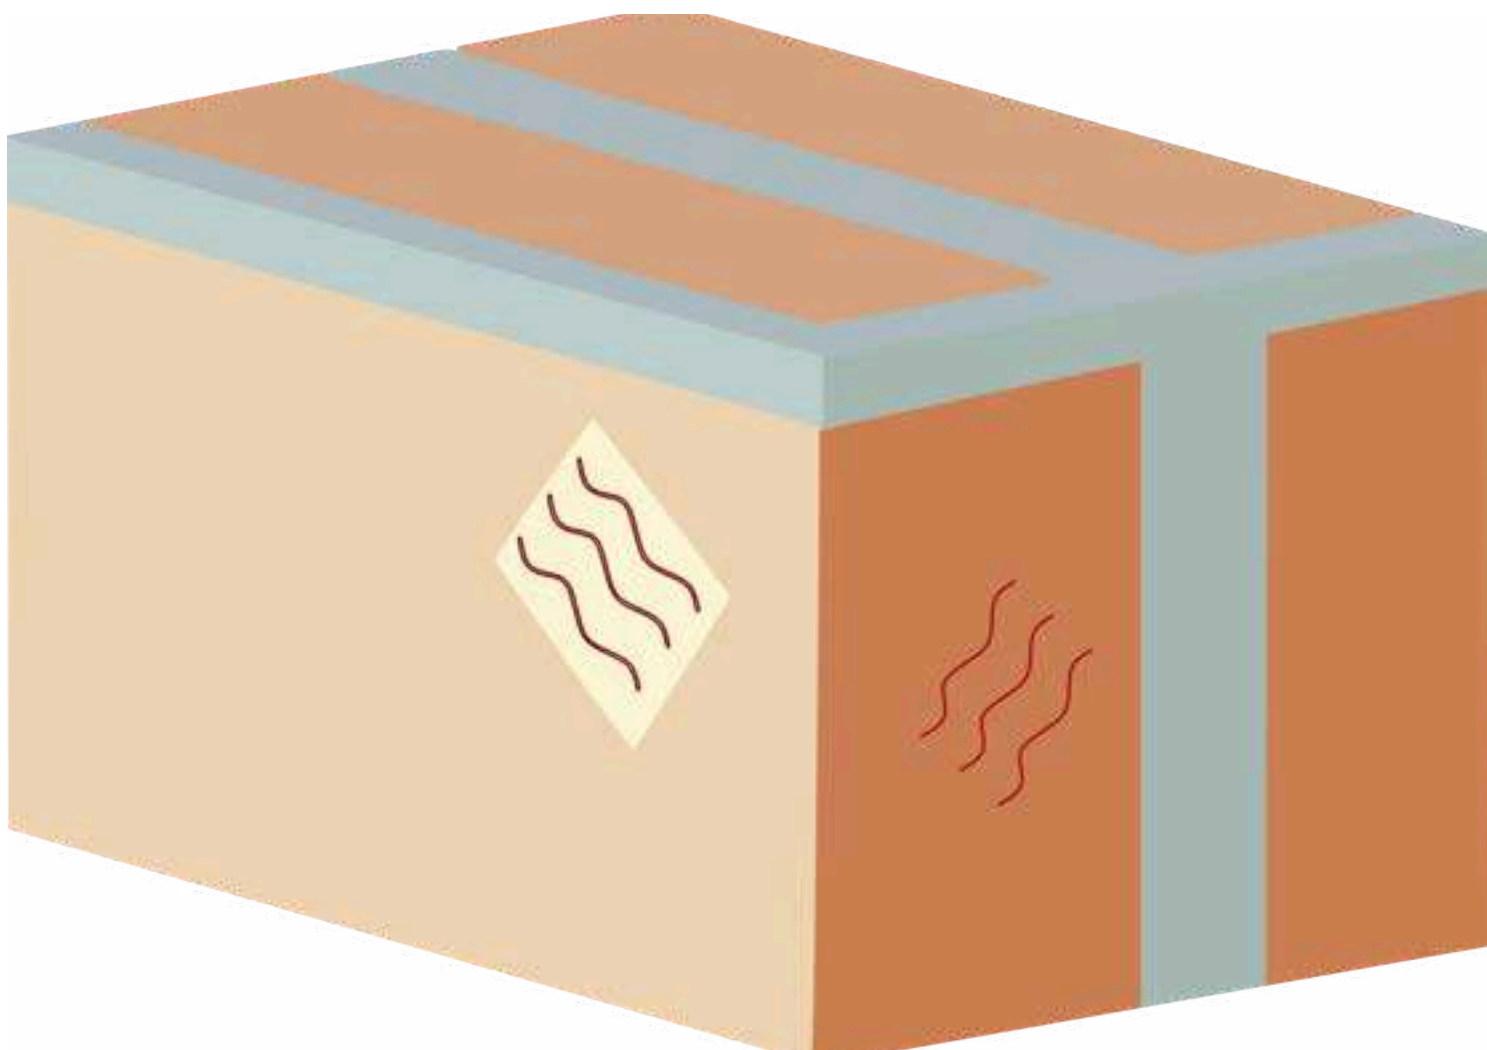




PRINTED BOPP TAPE

- Up to 6 colour sandwich printing
- Low MOQ's
- Metallic Inks & High Light Fastness Inks (UV Resistant) options available

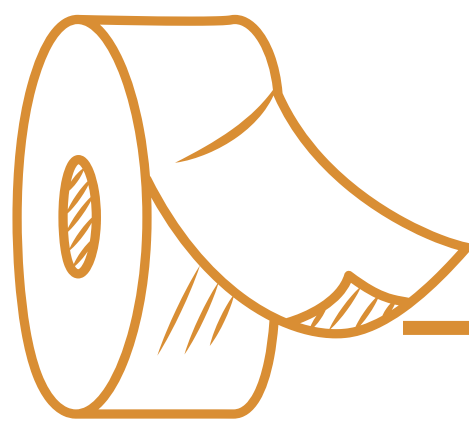

STRUCTURE

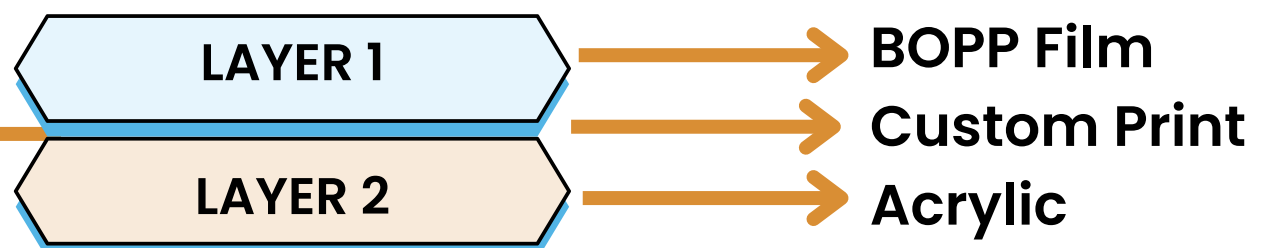

PERFORMANCE

***Performance parameters - Refer to page no. 8**

Colours	Slit Material	Jumbo Rolls	Small Jumbo Rolls
Transparent & Custom Colours	Width: 18 mm to 96 mm Length: 20 meters to 2000 meters	Width: 740 mm to 1320 mm Length: 4000 meters	Width: 144 & 288 mm Length: 1500 meters

FEATURES

- Cost Effective
- Long Shelf Life
- Good Tensile Strength for Long Term Application
- Ageing Resistant
- Strong OPP Film
- Easy to apply on variety of surfaces

APPLICATION



Bonding




Marketing



Security Uses



Heavy Duty Packaging



LOW NOISE TAPE NO NOISE TAPE



Low Noise & No Noise Tapes are specially engineered for quiet & smooth dispensing


LN – $\leq 85\text{dB}$

NN – $\leq 65\text{dB}$



Used in packing environment complying with ambient decibel levels as per Occupational Health and Safety standards such as ISO 18001:2015

STRUCTURE

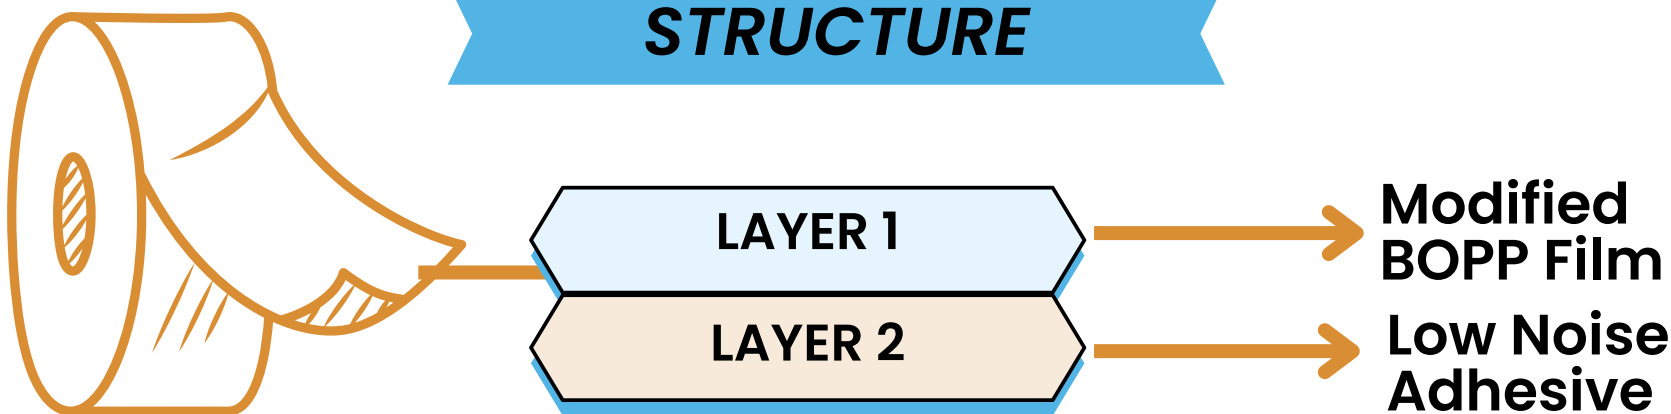

PERFORMANCE

Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
BOPP Film	23 μ	38 μ /1.52 mil	< 12 cm	> 2000 mins	> 600 g/in	> 2.8 kg/cm
BOPP Film	23 μ	43 μ /1.72 mil	< 8 cm	> 5000 mins	> 600 g/in	> 2.8 kg/cm
BOPP Film	25 μ	45 μ /1.8 mil	< 7.5 cm	> 5000 mins	> 650 g/in	> 3.2 kg/cm
BOPP Film	29 μ	50 μ /2 mil	< 7 cm	> 5000 mins	> 650 g/in	> 3.4 kg/cm

Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 36 mm to 144 mm Length: 25 meters to 200 meters

FEATURES

- Easy Unwind
- Ideal for multiple packing stations
- Good Tensile Strength
- Very Long Shelf Life
- Custom print available


APPLICATION



Sealing & Joining




Heavy Duty Packaging



MACHINE ROLL



Specially designed for running on High Speed Auto Taping machines. They serve as an excellent substitute for traditional hot-melt OPP tapes. They can also be customized for general packaging, printed designs, and freeze-grade applications

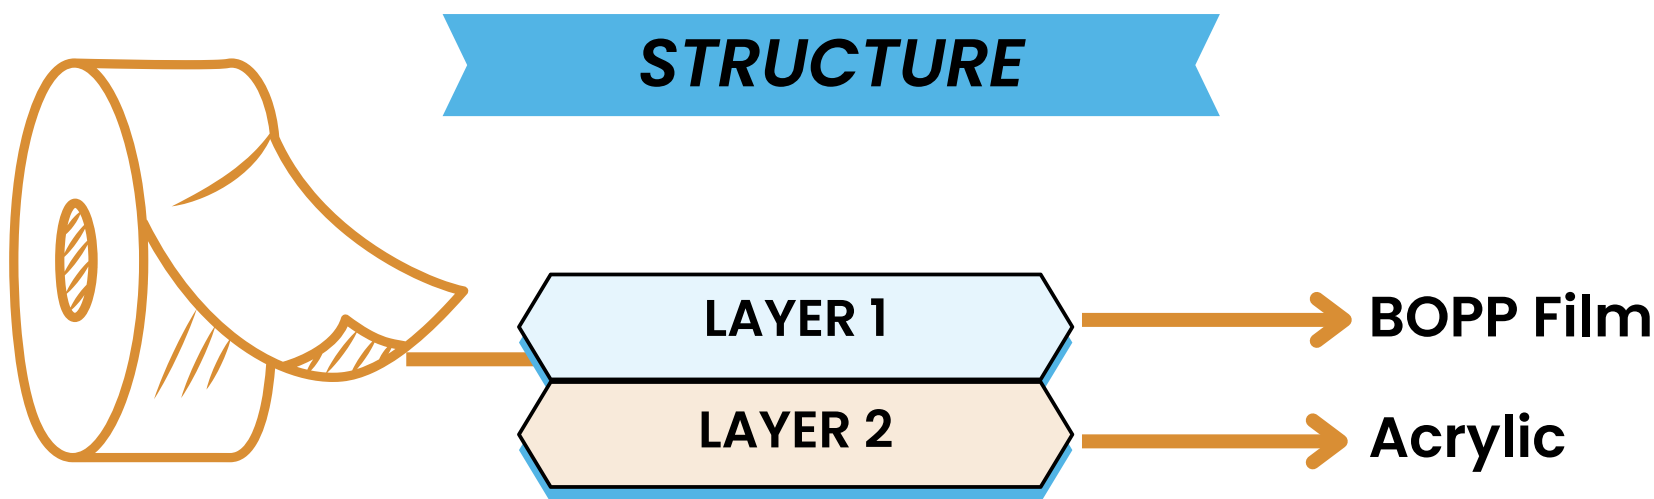

PERFORMANCE

****Performance parameters – Refer page no. 8***


Colours	Slit Material
Transparent/Brown/White/Custom Colours	Width: 30 mm to 144 mm Length: 650 meters to 2000 meters

FEATURES

- Residue Free Operations
- High Speed Machine Operations
- High Tensile Strength
- Very Long Shelf Life

APPLICATION






PACKAGING TAPE HOT MELT



Hot Melt BOPP Tapes have very aggressive tack & peel. It also has high-shear properties. Very good for high speed auto taping machines

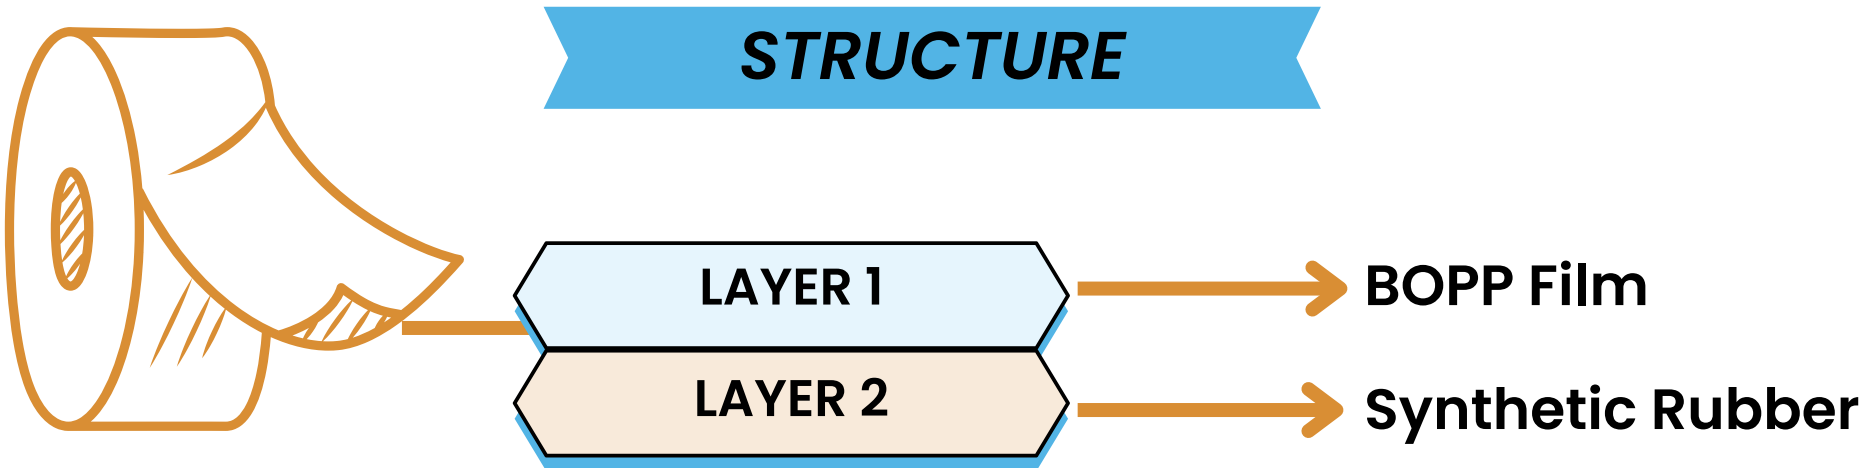

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
HMOPP2518	BOPP Film	25µ	45µ/1.8 mil	< 7cm	> 5000 mins	> 800 g/in	> 3.1 kg/in


Colours	Slit Material	Jumbo Rolls
Transparent/Brown/White/Cust om Colours	Width: 24 mm to 144 mm Length: 25 meters to 2000 meters	Width: 1610 mm Length: 4000 meters

FEATURES

- Strong OPP Film
- Easy to apply on variety of surfaces
- Clear adhesive with high tack, peel and shear

APPLICATION






SUPER CLEAR TAPE

Engineered to be truly transparent, these tapes use a special grade of BOPP Film and a superior strength clear adhesive.

The tapes are also known as bubble-free or clear to core



STRUCTURE

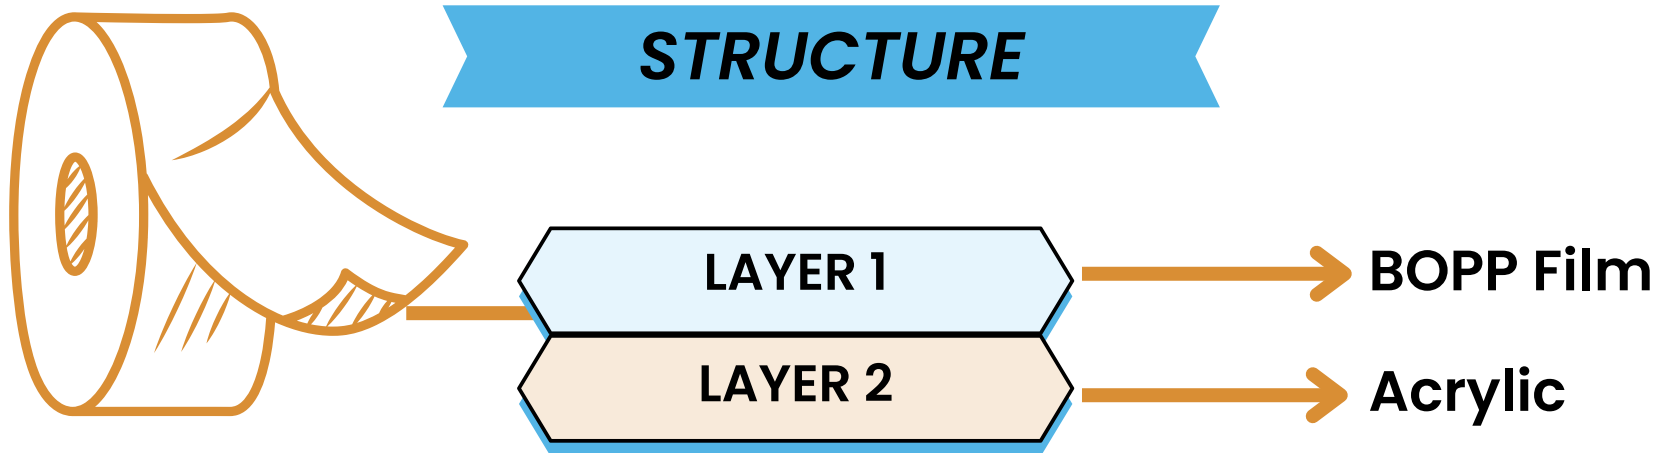

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
SCBOPP2320	BOPP Film	23μ	43μm/1.72mil	< 8 cm	> 1800 mins	> 480 g/in	> 2.8 kg/cm
SCBOPP2520	BOPP Film	25μ	45μm/1.8mil	< 7.5 cm	> 1800 mins	> 520 g/in	> 3.2 kg/cm
SCBOPP2921	BOPP Film	29μ	50μm/2mil	< 7 cm	> 2200 mins	> 520 g/in	> 3.4 kg/cm

Colours	Slit Material
Super Clear	Width: 12 mm to 72 mm Length: 25 meters to 100 meters

FEATURES

- Tape as clear as a Glass
- Superior Clear Adhesive
- Highly Attractive
- Strong Adhesion

APPLICATION




Bonding & Sealing



Automatic Packaging



High-Speed Operations




INVISIBLE TAPE



Invisible Tapes have a smooth finish which allows the tape to seamlessly blend with the paper



STRUCTURE

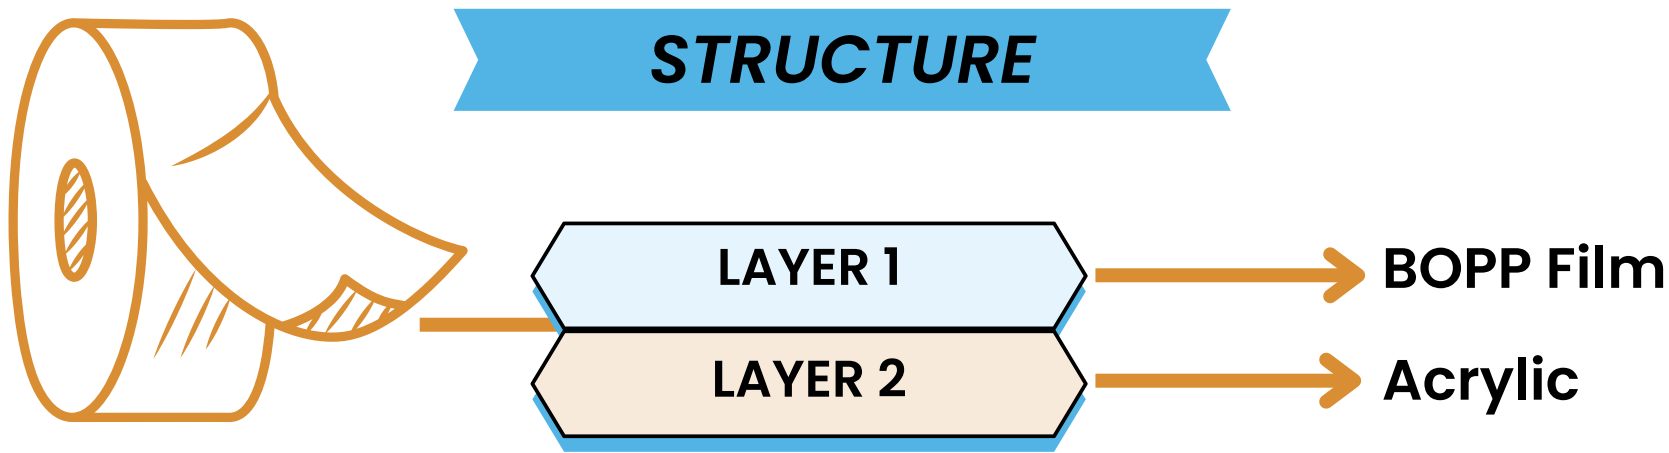

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
INVOPP2515	BOPP Film	25µ	40µ/1.6 mil	< 8.5 cm	> 700 mins	> 450 g/in	> 3.2 kg/cm
INVOPP4020	BOPP Film	40µ	60µ/1.6 mil	< 7.5 cm	> 700 mins	> 650 g/in	> 4.0 kg/cm

Colours	Slit Material
Matt White	Width: 12 mm to 100 mm Length: 25 meters to 100 meters

FEATURES

- Invisible / Low visibility when stuck on Paper
- Invisible under photocopy / scanners
- Smooth Finish & Writable
- Leaves no marks during photocopy

APPLICATION



Mending




Gift Packing



Sealing



Labeling




METALLIZED BOPP TAPE

Metallized BOPP Tapes are a good alternative to Aluminum Foil Tapes offering low vapour permeability and good barrier against UV, water & environmental elements



STRUCTURE

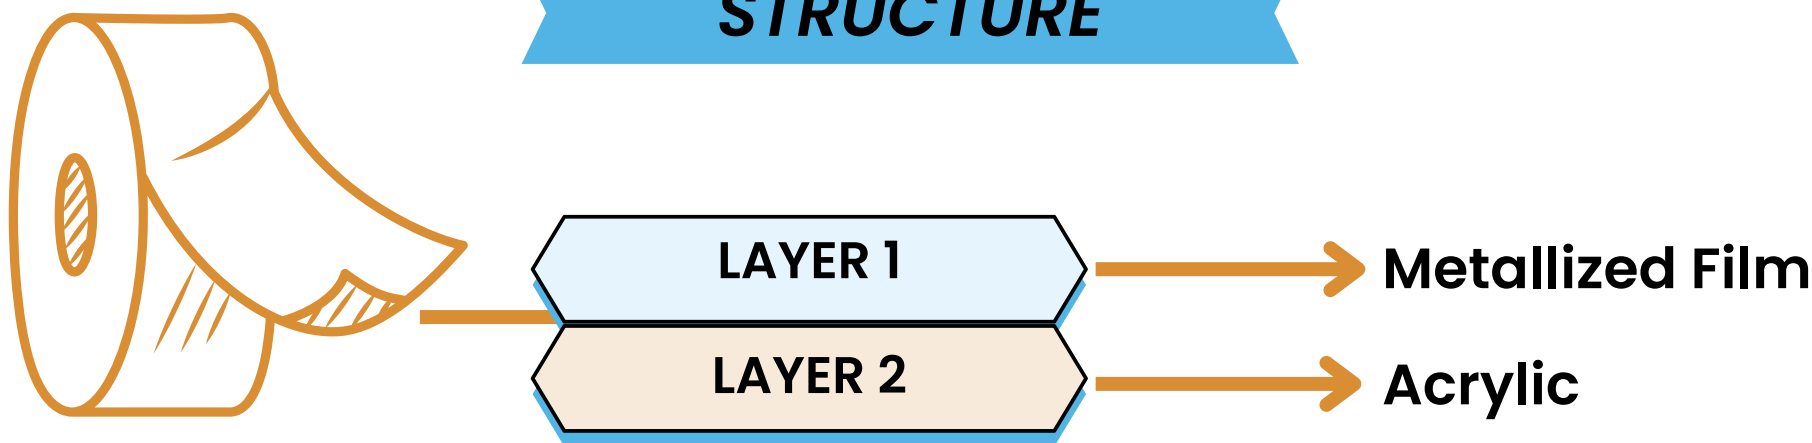

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
MPP25	BOPP Film	25μ	45μ/1.8 mil	< 10 cm	> 5000 mins	> 600 g/in	> 3.4 kg/cm
MPP28	BOPP Film	28μ	55μ/2.2 mil	< 8 cm	> 5000 mins	> 600 g/in	> 3.6 kg/cm

Colours	Slit Material	Jumbo Rolls
Silver	Width: 12 mm to 75 mm Length: 20 meters to 100 meters	Width: 1025 mm to 1315 mm Length: 4000 meters

FEATURES

- High Reflectivity of light
- High Barrier Properties
- Cost Effective
- Good Tensile Strength

APPLICATION




High Barrier HVAC Tape



Bonding & Sealing




Packaging




BOPP FREEZER TAPE

Freezer Tape can withstand up to -20° Celsius
Made from a specialized grade of Acrylic
Adhesive, the tape is developed to maintain
its performance at colder temperatures.
Replacement to traditional rubber solvent
packaging tapes

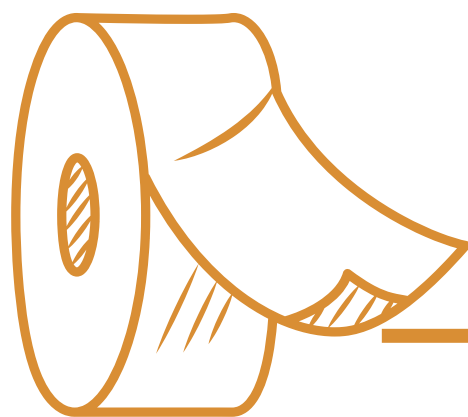

STRUCTURE

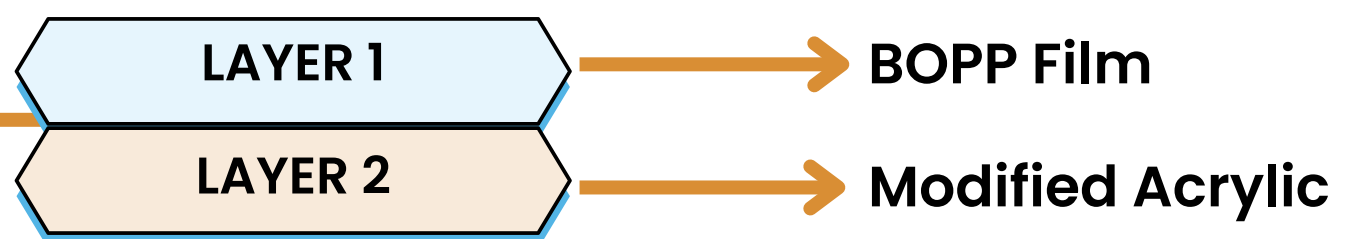

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
FZPP2520	BOPP Film	25 μ	45 μ /1.8 mil	< 8.5 cm	> 5000 mins	> 650 g/in	> 3.2 kg/in
FZPP2525	BOPP Film	25 μ	50 μ /2 mil	< 8 cm	> 5000 mins	> 700 g/in	> 3.2 kg/in
FZPP2926	BOPP Film	29 μ	55 μ /2.2 mil	< 7.5 cm	> 5000 mins	> 700 g/in	> 3.4 kg/in

Colours	Slit Material	Jumbo Rolls
Transparent/Brown/Blue/ Custom Colours	Width: 24 mm to 144 mm Length: 25 meters to 1000 meters	Width: 1025 mm to 1610 mm Length: Up to 8000 meters

FEATURES

- Service temperatures -20° C to $+60^{\circ}$ C
- Application temperatures $+5^{\circ}$ C to $+40^{\circ}$ C
- Long Shelf Life
- Strong Adhesive with high tack, peel & shear


APPLICATION



Bonding



Heavy Duty
Packaging




SHELF STRIP TAPE



Shelf Strip Tapes are custom printed marketing tapes for application on shopping shelves.

It has a High Glossy finish, excellent opacity, and superb visibility of the printing, something essential for powerful brand recall and in-store marketing

STRUCTURE

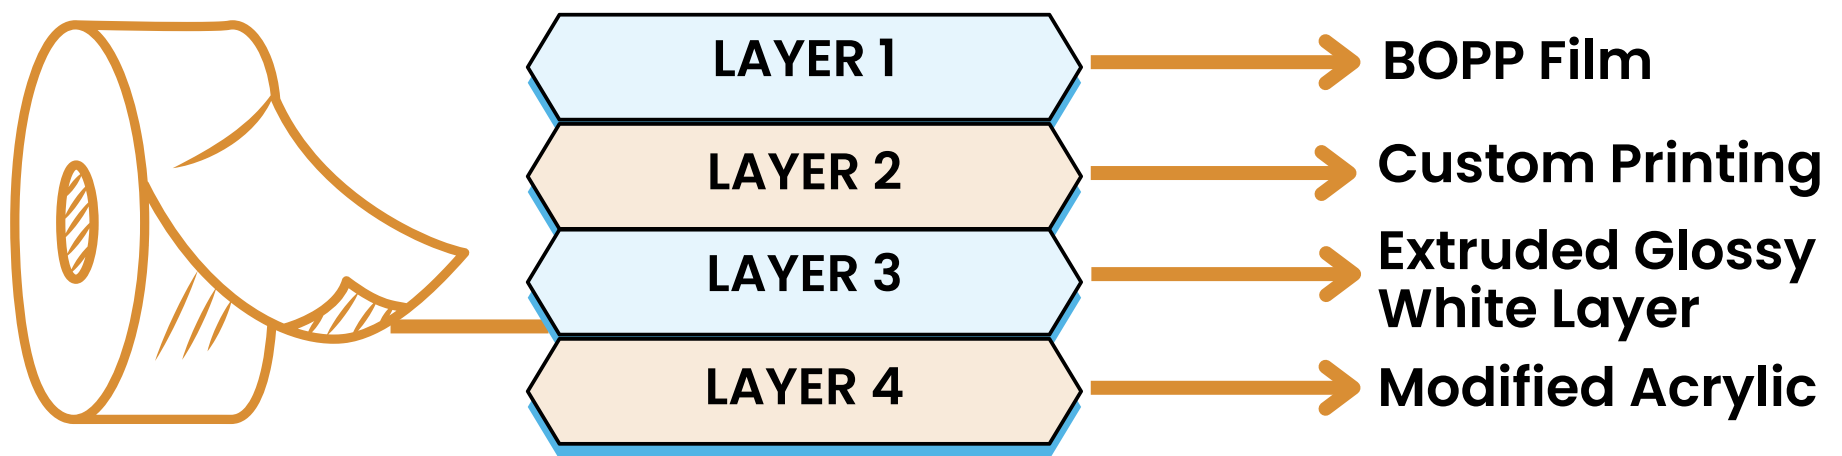

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Holding Power	Peel	Tensile
SST23	BOPP Film	60μ/2.4 mil	< 12 cm	> 5000 mins	> 650 g/in	> 2.8 kg/cm
SST37	BOPP Film	75μ/3 mil	< 8 cm	> 5000 mins	> 650 g/in	> 4.2 kg/cm

Colours	Slit Material	Jumbo Rolls
Custom Colours	Width: 24 mm to 100 mm Length: 25 meters to 200 meters	Width: 980 mm Length: 4000 meters

FEATURES

- High Glossy Finish
- Excellent Opacity
- Excellent Tensile Strength
- Superb Visibility of Printing
- Premium Brand Look


APPLICATION



Branding



Packaging




BOPP NECK SEALING TAPE



Neck or Bag Sealing Tape is used in grocery stores to seal bags of meat, fruit, vegetables & bread.
Replacement to traditional bag sealing tapes

STRUCTURE

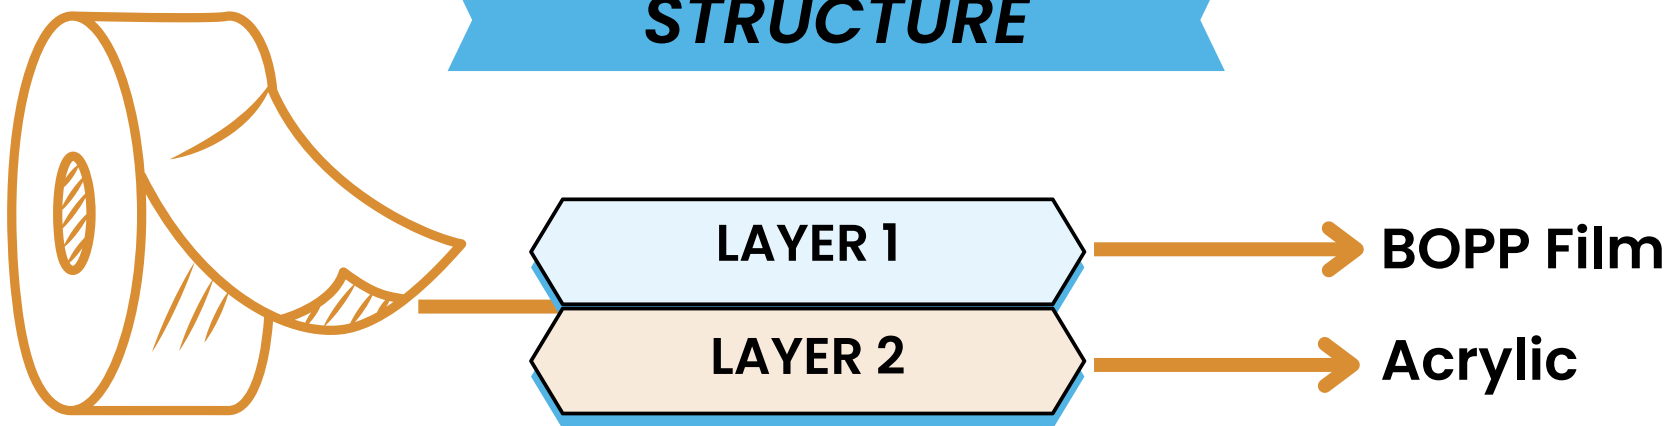

PERFORMANCE


Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile	Elongation
NST3728	BOPP Film	37μ	65μ/2.6 mil	< 6 cm	> 750 g/in	> 3.8 kg/in	100%


Colours	Slit Material
Red/Blue/Green and Custom Colours	Width: 8 mm to 24 mm Length: 50 meters to 66 meters

FEATURES


- High Strength OPP Film
- Coloured tapes with high tack, peel, and shear
- PVC Free
- Cost Effective
- Moisture Resistant

APPLICATION

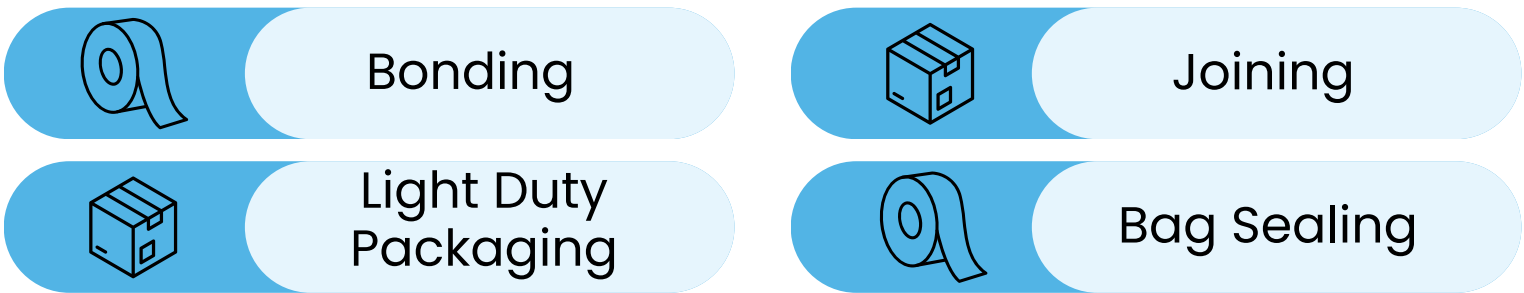




PP BOOK BINDING TAPE

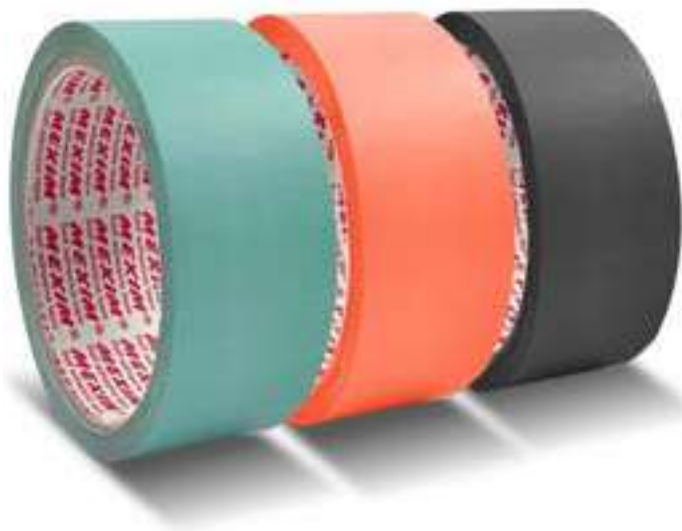

PP Book Binding Tape is designed for professional book spine reinforcement, & edge binding. It offers a sleek matt finish for a clean, non-reflective look. Custom Pantones also available to perfectly match any book design

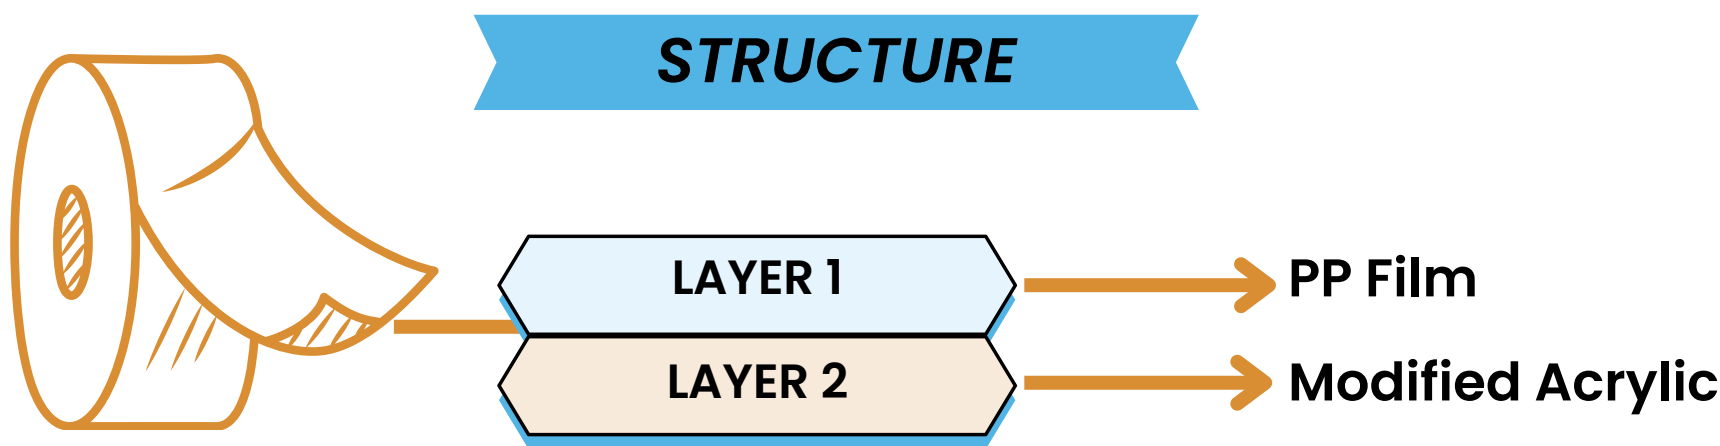

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Holding Power	Peel
PPBBT	PP Film	65μ	< 6 cm	> 5000 mins	> 850 g/in

Colours	Slit Material
Black & Custom Colours	Width: 24 mm to 100 mm Length: 50 meters to 1000 meters


FEATURES

- Excellent Tensile Strength
- Adhesive with Strong Holding Power
- High Opacity
- Matt Finish
- Custom Pantones Possible

APPLICATION



Book Spine
Reinforcement, &
Edge Binding




FINGER LIFT BOPP TAPE

Finger Lift BOPP Tape is a specialized packaging tape with a convenient extended space on one or both sides for quick removal and reapplication. It features strong adhesion and is ideal for bags, pouches and food packaging



STRUCTURE

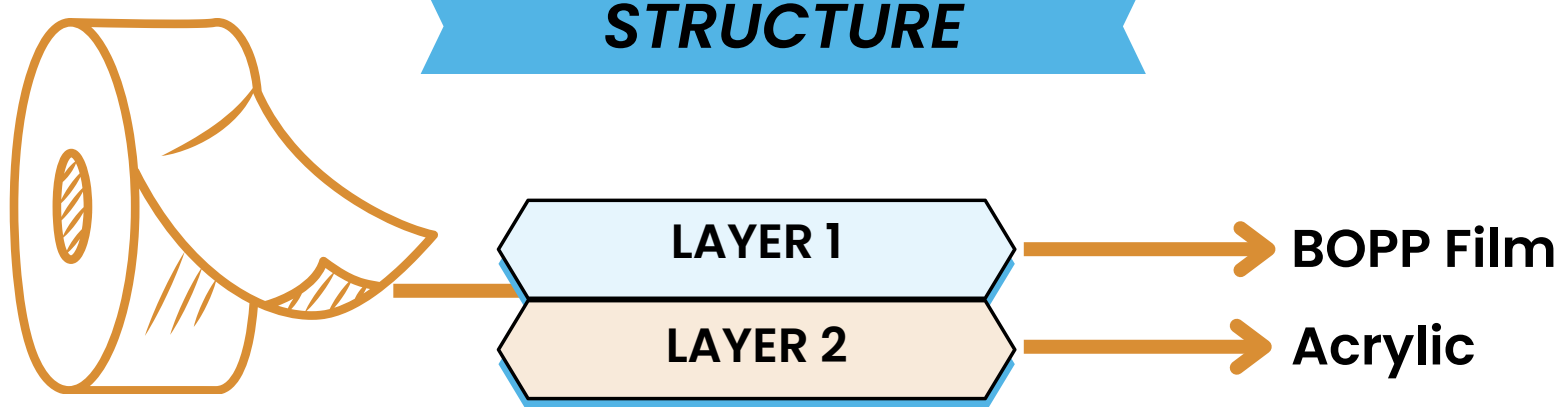

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Holding Power	Tensile
FLPPT	BOPP Film	50 μ /2 mil	< 7 cm	> 5000 mins	> 3.4 kg/cm

Colours	Slit Material
Custom Colours	Width: 24 mm to 100 mm Length: 50 meters to 100 meters


FEATURES

- **Easy to pull and remove**
- Adhesive with Strong Holding Power
- Excellent Tensile Strength
- Long Shelf Life

APPLICATION




Ideal for bags,
pouches and food
packaging



CLEAN REMOVAL BOPP TAPE



Clean Removal BOPP tape is for fast turnaround segments like Movers and Packers. Engineered for residue-free removal with strong holding power, the tape peels cleanly without leaving adhesive residue behind

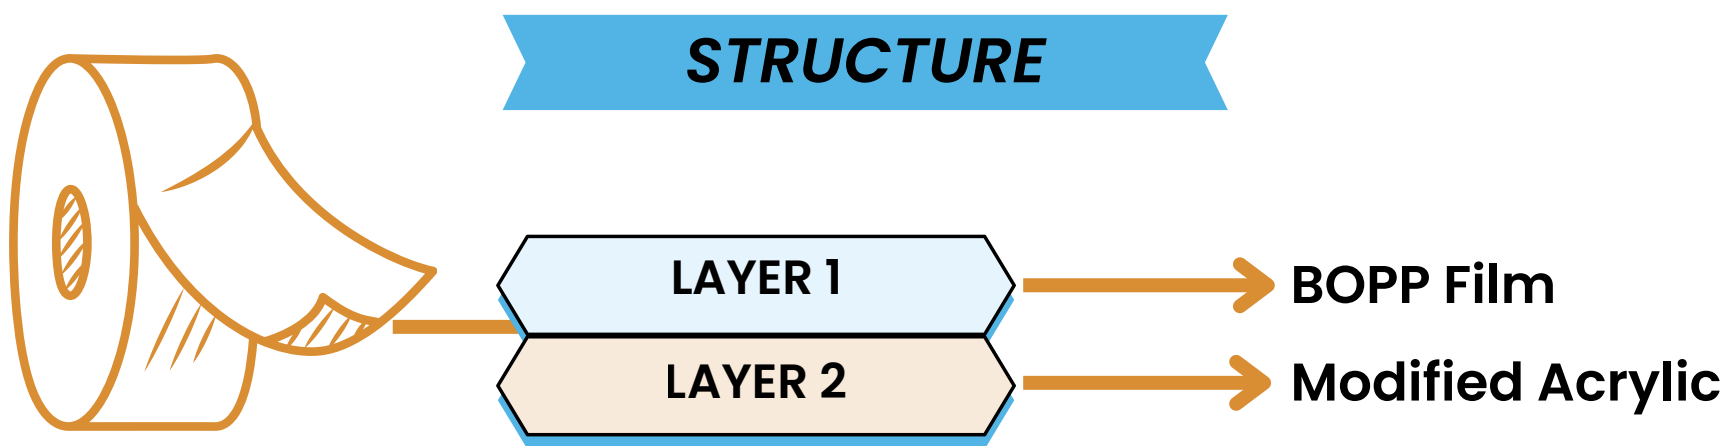

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Holding Power	Peel
CLRPP	BOPP Film	43µ/1.72 mil	< 8 cm	> 5000 mins	> 600 g/in

Colours	Slit Material
Clear	Width: 24 mm to 100 mm Length: 50 meters to 100 meters

FEATURES

- **Residue Free Removal**
- Adhesive with Strong Holding Power
- Excellent Tensile Strength
- Long Shelf Life

APPLICATION




Electronics &
Appliance
Manufacturing



Movers & Packers

**Clean removal performance may vary depending on the surface, temperature and time period*




SELF ADHESIVE LAMINATION FILM



Self Adhesive Lamination film for high speed label printing presses. These films provide protection from water and contaminants.

Available in Glossy and Matt finish

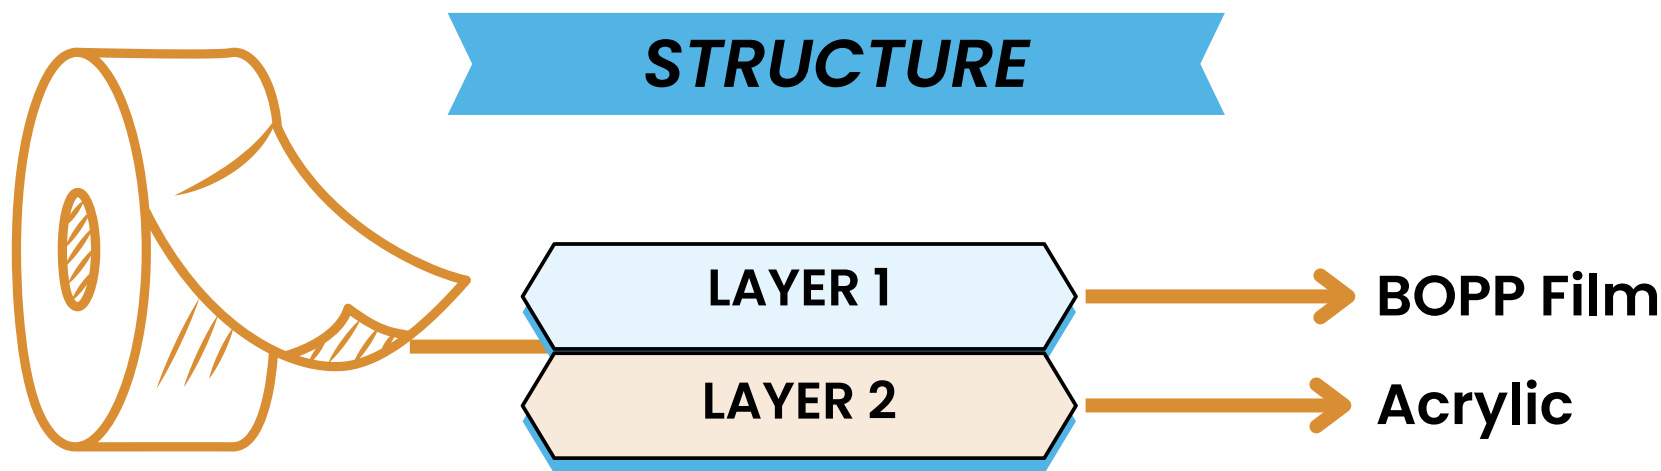

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Tack	Peel	Tensile
LAMIOPP2508	BOPP Film	25µ	33µ/1.32 mil	< 11 cm	> 250 g/in	> 3.4 kg/in

Colours	Slit Material
Transparent	Width: 100 mm to 1024 mm Length: 1000 meters

FEATURES


- Provides protection from water and other contaminants
- Glossy & Matte finish both available

APPLICATION



High-speed online lamination on web-presses


TISSUE TAPES

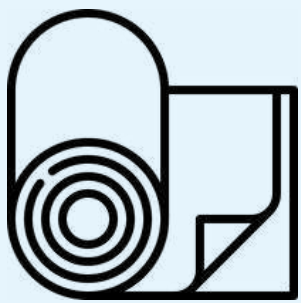

Stick it Without any Issue.....


Double-sided Tissue Tape is a lightweight nonwoven tissue paper coated with adhesive on both sides and laminated to a release paper

Double-sided Tissue Tape is available with Synthetic rubber, Rubber Solvent & Acrylic Adhesive coatings




DS TISSUE TAPE HOT MELT

Double Side Tissue Tapes coated with a synthetic rubber based adhesive have a high tack and are suitable for lightweight splicing & holding applications

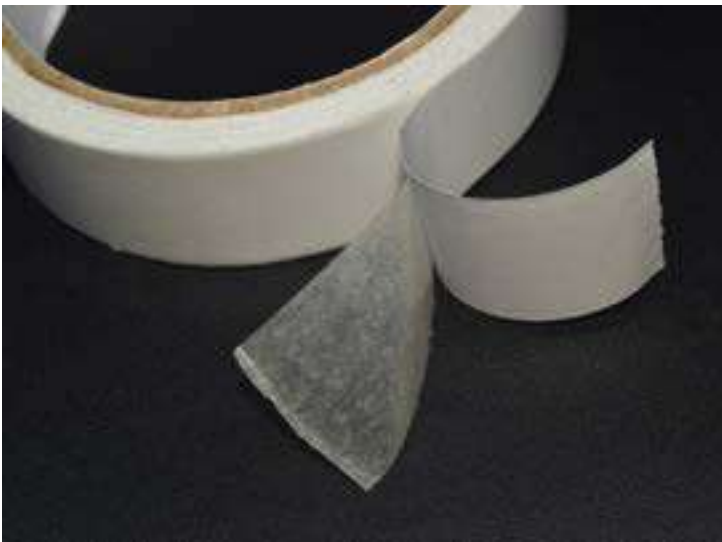

STRUCTURE

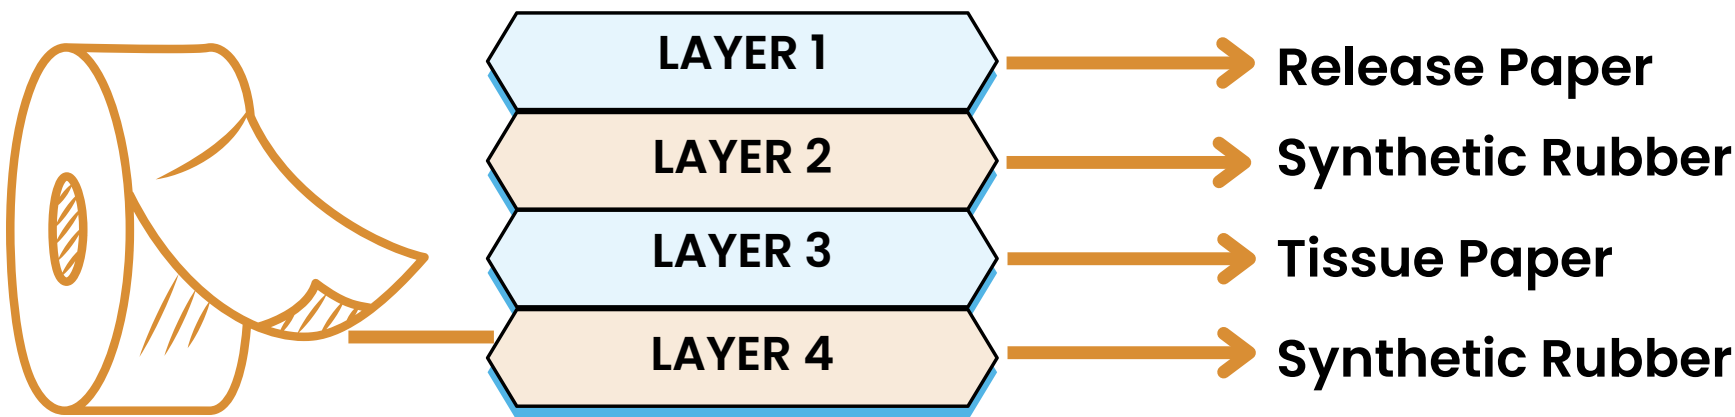

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTHM60	Tissue Paper	60µ/2.4 mil	< 6 cm	> 600 g/in	> 0.5 kg/in	-10 C to 60 C
DSTHM70	Tissue Paper	70µ/2.8 mil	< 5 cm	> 800 g/in	> 0.5 kg/in	-10 C to 60 C
DSTHM80	Tissue Paper	80µ/3.2 mil	< 5 cm	> 1000 g/in	> 0.5 kg/in	-10 C to 60 C
DSTHM90	Tissue Paper	90µ/3.6 mil	< 5 cm	> 1000 g/in	> 0.5 kg/in	-10 C to 60 C
DSTHM100	Tissue Paper	100µ/2.4 mil	< 5 cm	> 1100 g/in	> 0.5 kg/in	-10 C to 60 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1020 mm Length: 1000 meters

FEATURES

- High tack adhesive
- Easy to apply
- Easy to tear
- Non-Stretchable
- Easy to Handle

APPLICATION




Light Mounting Applications



Joining & Splicing Operation



Arts & Craft




DS TISSUE TAPE SOLVENT BASED



Double Side Tissue Tapes coated with a Rubber Solvent adhesive have a very high tack and are suitable for medium to heavy weight splicing & holding applications

STRUCTURE

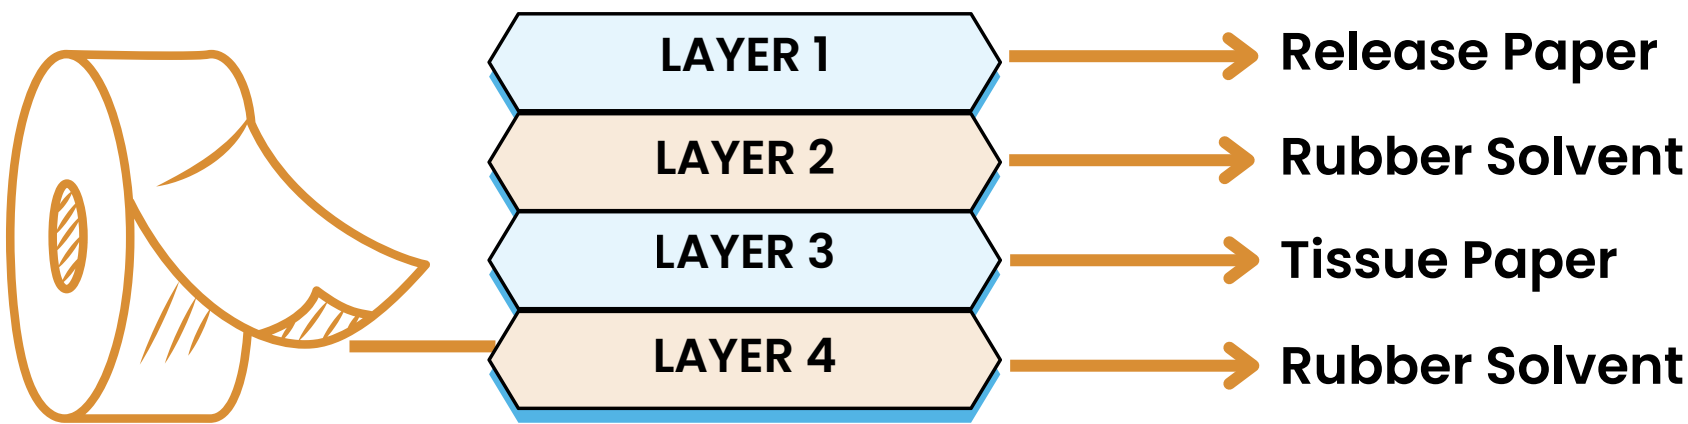

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTSB70	Tissue Paper	70µ/2.8 mil	< 5 cm	> 1100 g/in	> 0.5 kg/in	-10 C to 60 C
DSTSB80	Tissue Paper	80µ/3.2 mil	< 5 cm	> 1200 g/in	> 0.5 kg/in	-10 C to 60 C
DSTSB90	Tissue Paper	90µ/3.6 mil	< 5 cm	> 1400 g/in	> 0.5 kg/in	-10 C to 60 C
DSTSB100	Tissue Paper	100µ/2.4 mil	< 5 cm	> 1400 g/in	> 0.5 kg/in	-10 C to 60 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1260 mm Length: 1000 meters

FEATURES

- High Tack Solvent Based Adhesive
- Easy to apply on smooth surfaces
- Non-Stretchable
- Easy to Handle


APPLICATION



Mounting Applications



Joining & Splicing Operation




DS TISSUE TAPE ACRYLIC



Double Side Tissue Tapes coated with acrylic adhesive are UV resistant and are ideal for long lasting applications. The tapes are good for medium to heavy weight splicing applications

STRUCTURE

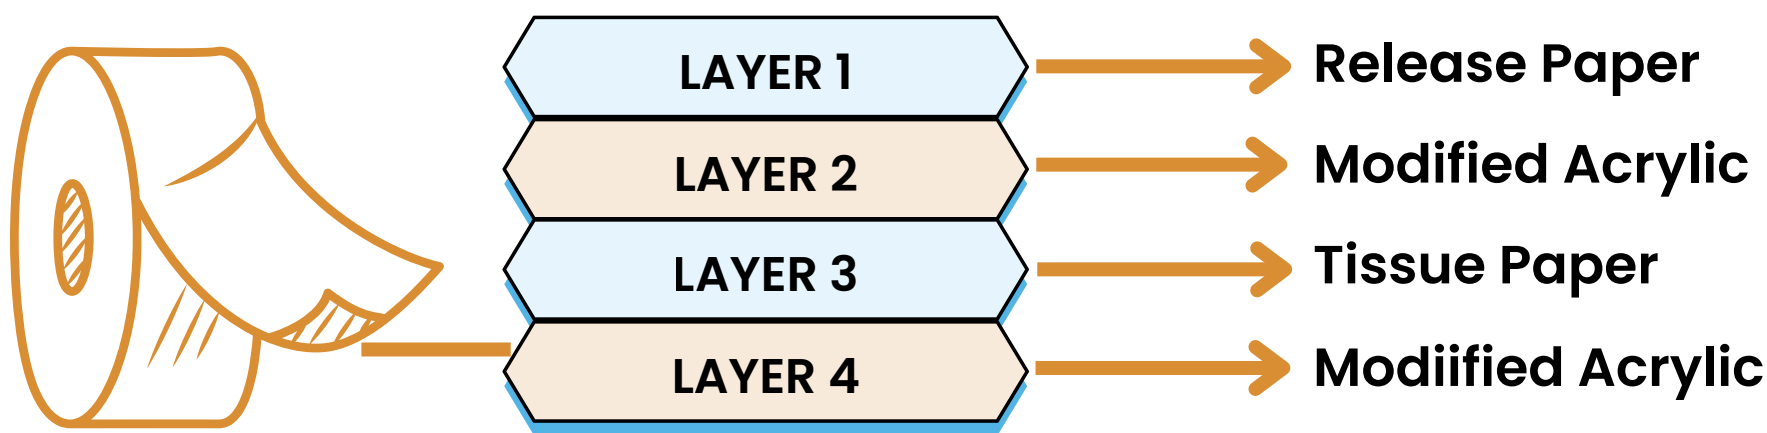

PERFORMANCE

Product Code	Backing	Total Thickness	Tack	Peel	Tensile	Service Temperature
DSTWB80	Tissue Paper	80µ/3.2 mil	< 4.5 cm	> 950 g/in	> 1 kg/in	-20 C to 80 C
DSTWB105	Tissue Paper	105µ/4.2 mil	< 4 cm	> 950 g/in	> 1 kg/in	-20 C to 80 C
DSTWB120	Tissue Paper	120µ/4.8 mil	< 3.5 cm	> 1100 g/in	> 1 kg/in	-20 C to 80 C
DSTWB150	Tissue Paper	150µ/6 mil	< 3.5 cm	> 1200 g/in	> 1 kg/in	-20 C to 80 C

Colours	Slit Material	Jumbo Rolls
White Tissue Paper + White Release Paper	Width: 12 mm to 100 mm Length: 10 meters to 200 meters	Width: 1220 mm Length: 1000 meters

FEATURES

- Easy to apply on smooth surfaces
- Easy to Handle
- Eco-Friendly, 100% Recyclable
- Non-Stretchable
- Re-Pulpable

APPLICATION



Mounting
Applications




Joining & Splicing
Operation

PAPER PACKAGING TAPES



The environmental perspective is becoming an increasingly important aspect in packaging

We offer Self Adhesive Kraft Paper Tapes, Water Activated Tape, Reinforced Water Activated Tape & Self Adhesive Crepe Paper Tape




SELF ADHESIVE KRAFT PAPER TAPE



Self-Adhesive Kraft Paper Tapes are made of high-strength & 100% recycled Kraft paper having fantastic durability. The tapes are 100% recyclable / compostable / bio-degradable

Custom printing possible!

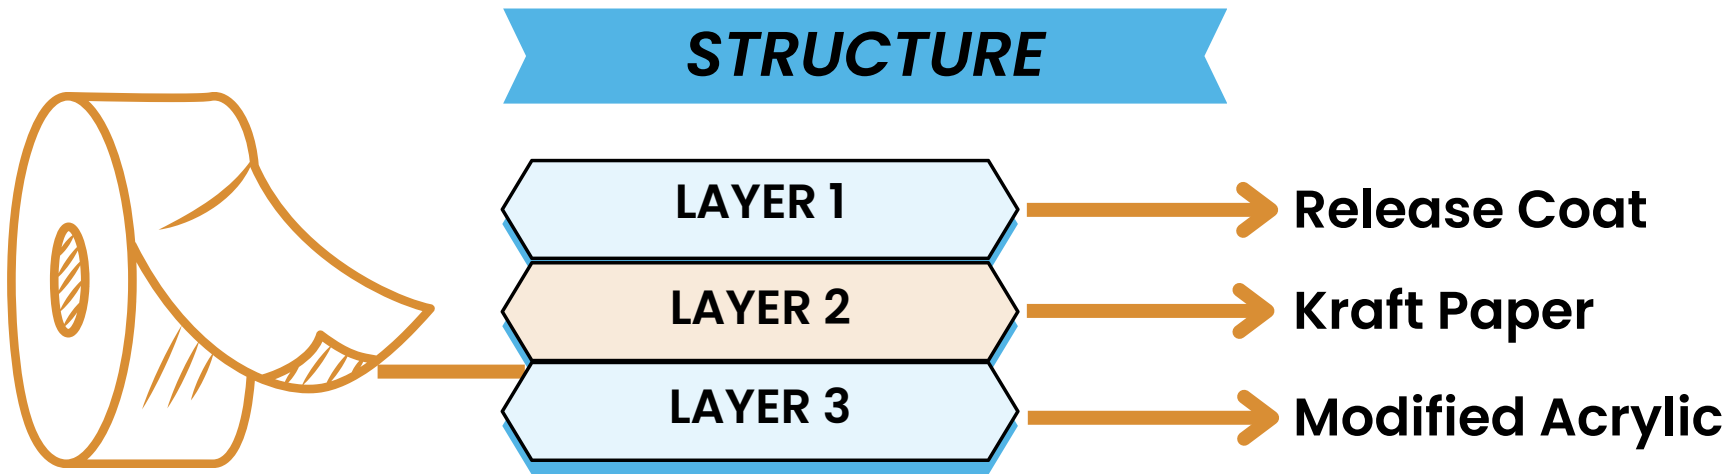

PERFORMANCE

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Peel	Tensile	Service Temp
SAK70	Kraft Paper	70 GSM	120 GSM	> 3000 mins	> 800 g/in	> 7 kg/in	-30° C to 80° C

Colours	Slit Material	Jumbo Rolls
Brown & White	Width: 18 mm to 96 mm Length: 25 meters to 500 meters	Width: 1060 mm Length: 500 meters

FEATURES

- High durability and tear resistance
- Easy to handle & apply
- Eco-Friendly, 100% Recyclable, Compostable & Re-pulpable


APPLICATION



Light-Heavy Duty Packaging



General Bonding & DIY Applications




REINFORCED SELF ADHESIVE KRAFT PAPER TAPE

Reinforced with strong fiberglass threads providing resistance to tearing, especially in heavy duty applications. Aggressive hotmelt adhesive provides secure bonding on almost all kinds of boxes



STRUCTURE

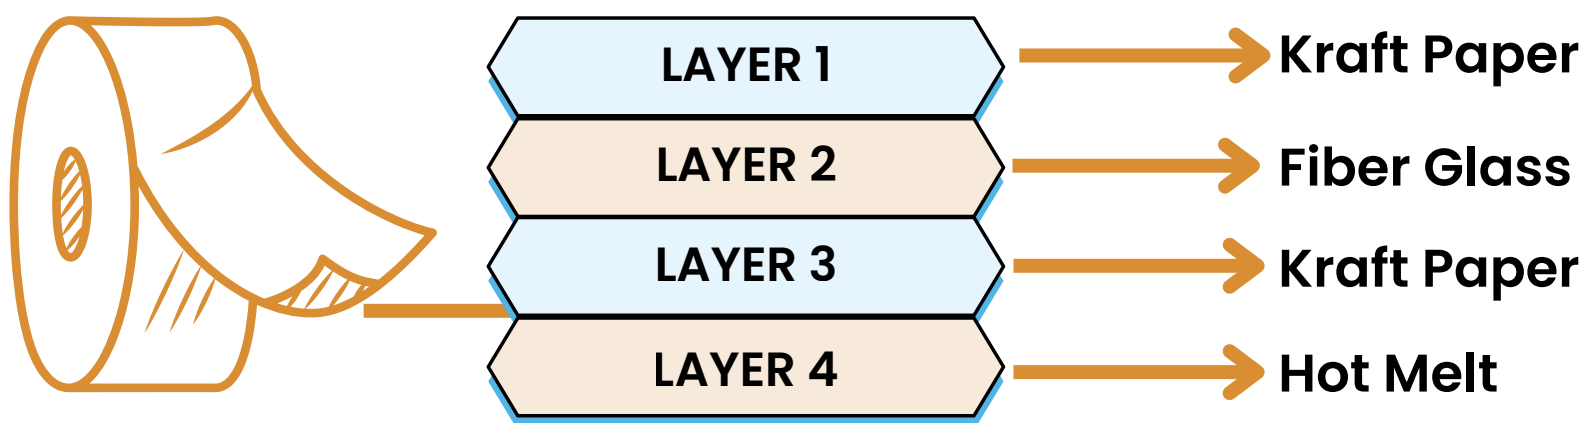

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Service Temp
ReSAK160BB6	Reinforced Kraft Paper	160μ	> 10000 mins	> 2500 g/in	0° C to 50° C

Colours	Slit Material
Brown	Width: 18 mm to 96 mm Length: 25 meters to 500 meters

FEATURES

- High durability and tear resistance
- Good conformity on irregular surfaces
- Aggressive adhesive for long-lasting bonding
- Easy to handle & apply


APPLICATION



Light-Heavy Duty
Packaging



General Bonding &
DIY Applications




**SELF ADHESIVE CREPE PAPER
PACKAGING TAPE - K6142**



Strong and flexible crepe paper with Rubber Solvent Adhesive for high adhesion and reliable bonding. Works well in wide temperature range and on recycled paper. Suitable for surface printing with compatible ink system and machines

STRUCTURE

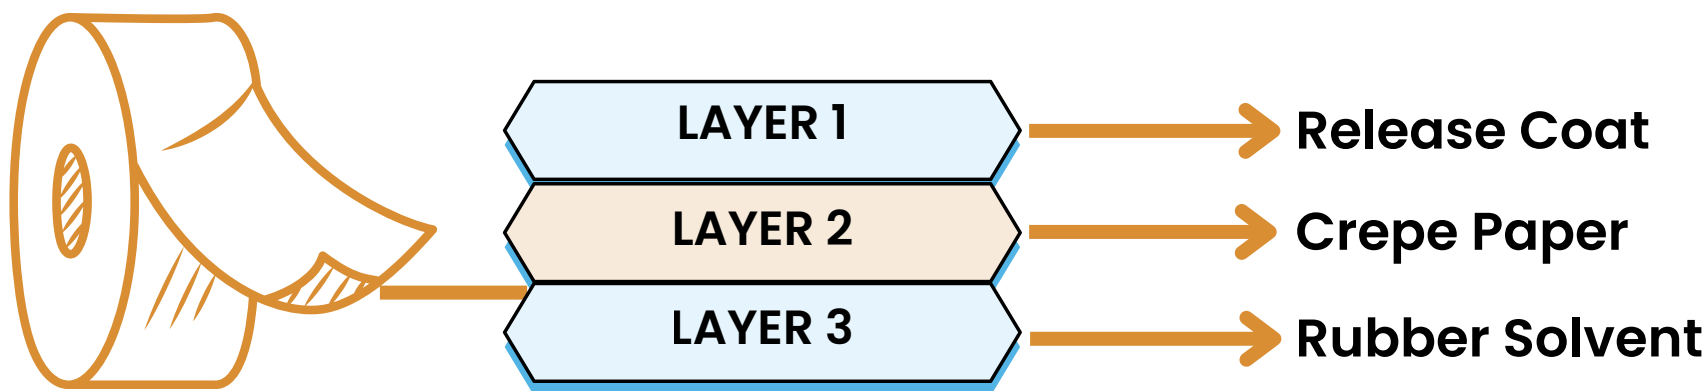

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Tensile	Service Temp
K6142	Crepe Paper	120 mic	> 10000 mins	> 750 g/in	> 5.50 kg/in	-10° C to 60° C

Colours	Slit Material
Brown	Width: 18 mm to 96 mm Length: 25 meters to 500 meters

FEATURES

- Excellent Conformity
- Easy to handle & apply
- Eco-Friendly
- Strong Holding Power


APPLICATION



Light-Heavy Duty
Packaging



General Bonding &
DIY Applications




WATER ACTIVATED TAPE



Water Activated Tape or Gummed Paper Tape is an economic solution for sustainability and security. Once applied the tapes bond permanently with Kraft paper cartons

Custom printing possible!

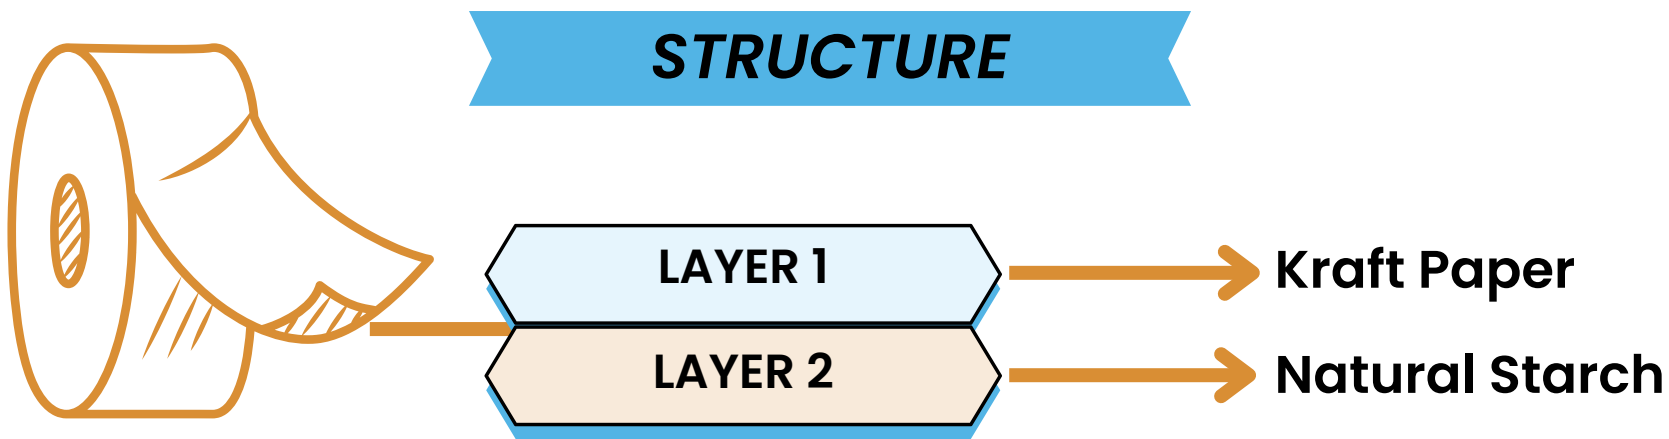

PERFORMANCE

Product Code	Backing	Paper GSM	Total GSM	Holding Power	Bonding to Paper	Tensile	Service Temp
WAT60	Kraft Paper	60 GSM	85 GSM	> 10000 mins	Permanent	> 6 kg/in	-30° C to 80° C
WAT70	Kraft Paper	70 GSM	95 GSM	> 10000 mins	Permanent	> 7 kg/in	-30° C to 80° C

Colours	Slit Material	Jumbo Rolls
Brown & White	Width: 18 mm to 96 mm Length: 25 meters to 500 meters	Width: 1060 mm Length: 500 meters


FEATURES

- High durability and tear resistance
- Eco-Friendly, 100% Recyclable, Compostable & Re-pulpable
- Cost Effective
- Permanent Bond with the surface

APPLICATION

 Light-Heavy Duty Packaging

 Tamper Proof Packaging




REINFORCED WATER ACTIVATED TAPE



Reinforced Water-Activated Paper Tape is tri-way reinforced with fiber-glass thread for high tear resistance. Once applied the tapes bond permanently with Kraft paper cartons

Custom printing possible!

STRUCTURE

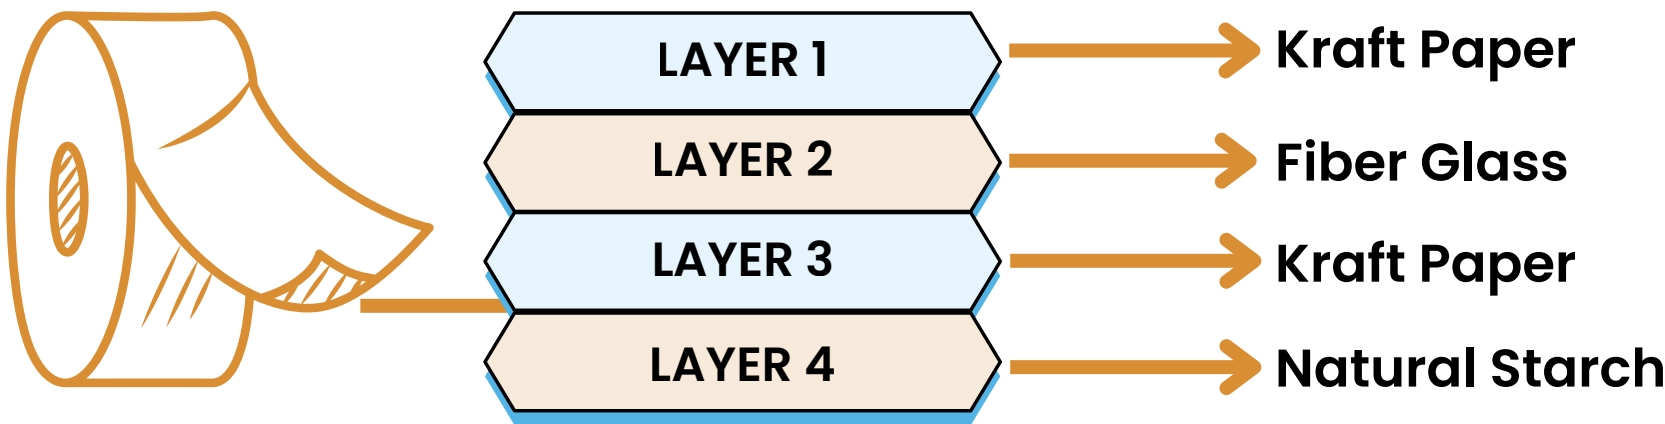

PERFORMANCE

Backing	Total GSM	Holding Power	Bonding to Paper	Tensile	Service Temp
Reinforced Kraft Paper	126 GSM	>10000 mins	Permanent	> 19 kg/in	-30° C to 80° C

Product Code	Colours	Slit Material	Jumbo Rolls
REWAT140BB5 REWAT130WB5 REWAT130WW5	Brown + Brown White + Brown White + White	Width: 18 mm to 300 mm Length: 25 meters to 500 meters	Width: 1270 mm Length: 1670 meters

FEATURES

- High durability and tear resistance
- Permanent Bond with the surface
- Reinforced Fiber Glass for increased Strength

APPLICATION




Tamper Proof
Packaging



Heavy Duty
Packaging


MASKING TAPES



***Masking is what
Everyone is Asking....***

Masking tapes can be applied on many different surfaces and removed without leaving any residue or causing any damage

We offer our Masking Tape for general-purpose use, outdoor applications, automotive applications & fine line for precision




GENERAL PURPOSE MASKING TAPE

Our general purpose masking tape is versatile, with a natural rubber-based adhesive. It has a high holding power, and easily removable without residue or breaking



STRUCTURE

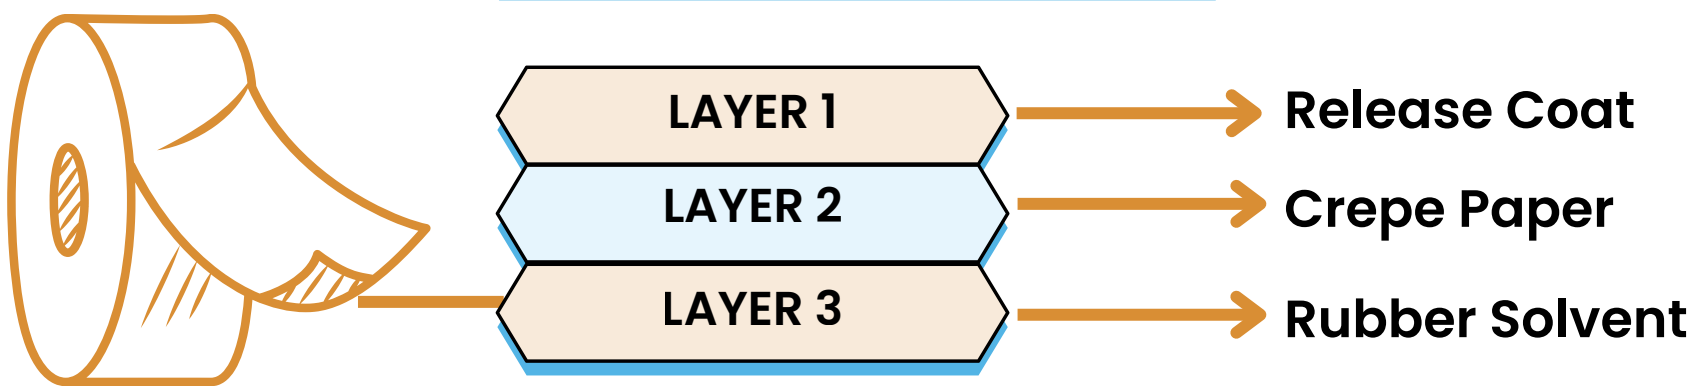

PERFORMANCE

Product Code	Backing	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
K6143	Crepe Paper	85 GSM	125µ/5 mil	> 1500 mins	> 600 g/in	> 7 kg/in	60° C x 60 mins
K6144	Crepe Paper	90 GSM	140µ/5.6 mil	> 6000 mins	> 700 g/in	> 8 kg/in	60° C x 60 mins

Colours	Slit Material	Jumbo Rolls
Off White	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters

FEATURES

- Strong Crepe Paper
- Clean Removability
- Good Holding Power
- Residue Free
- Temperature resistance **60° C x 60 minutes**


APPLICATION

 Painting Jobs

 Furniture Holding

 Labelling Supplies

 Decoration Purposes




OUTDOOR MASKING TAPE PXL6035



PXL6035 uses a modified acrylic adhesive for moderate peel and high holding power. With strong crepe paper, UV resistance, and 80°C tolerance for 60 minutes, it removes cleanly without residue or breaking + guaranteed residue-free for 30 days

STRUCTURE

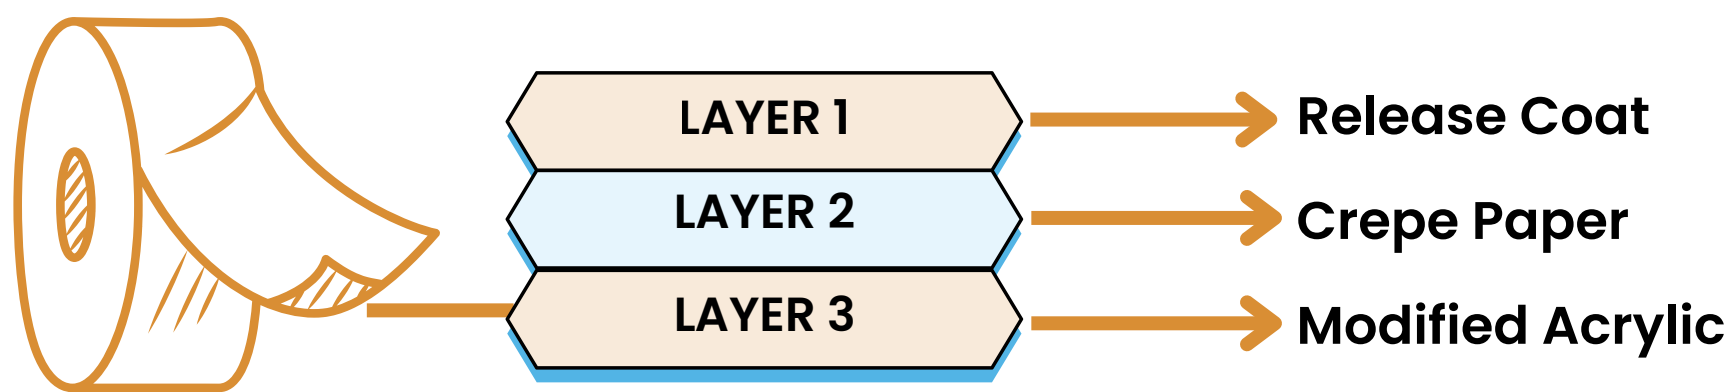

PERFORMANCE

Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
Crepe Paper	60 GSM	105 GSM	130µ/5.2 mil	> 1440 mins	> 450 g/in	6 kg/in	80° C x 60 mins

Product Code	Colours	Slit Material	Jumbo Rolls
PXL6035W PXL6035BL	White Blue	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters

FEATURES

- Strong Crepe Paper
- Clean Removability
- 30 day residue free removal guaranteed
- UV Resistant
- Temperature resistance **80° C x 60 minutes**

APPLICATION



Painting Jobs




Furniture Holding



Labelling Supplies



Decoration Purposes




AUTOMOTIVE MASKING TAPE PXL7515

Professional Painters automotive masking made for body shops, after-market and paint shops. Great for respraying, collision repairs, and other jobs. Easy to use and remove, they give a clean, professional finish every time. Added benefit – UV Resistance!



STRUCTURE

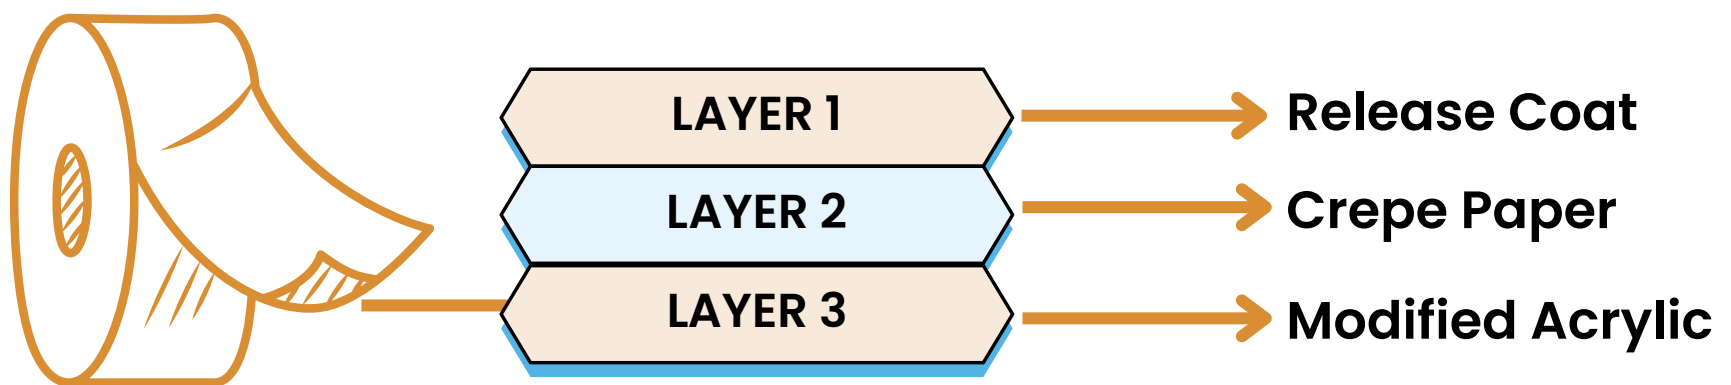

PERFORMANCE

Product Code	Backing	Backing GSM	Total GSM	Total Thickness	Holding Power	Peel	Tensile	Temperature Resistance
PXL7515	Crepe Paper	60 GSM	90 GSM	130µ/5.2 mil	> 1440 mins	> 450 g/in	6 kg/in	120° C x 60 mins

Colours	Slit Material	Jumbo Rolls
White	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters


FEATURES

- Strong Crepe Paper
- Clean Removability
- 30 day residue free removal guaranteed
- UV Resistant
- Temperature resistance **120° C x 60 minutes**

APPLICATION



Masking & Painting in
Professional Paint Shops




FINE LINE MASKING TAPE P5030

P5030 is a thin, highly conformable tape designed for precise, sharp paint lines and intricate masking. It features flexibility to follow curves, contours, and complex surfaces without tearing or lifting, while providing clean edges & residue-free removal



STRUCTURE

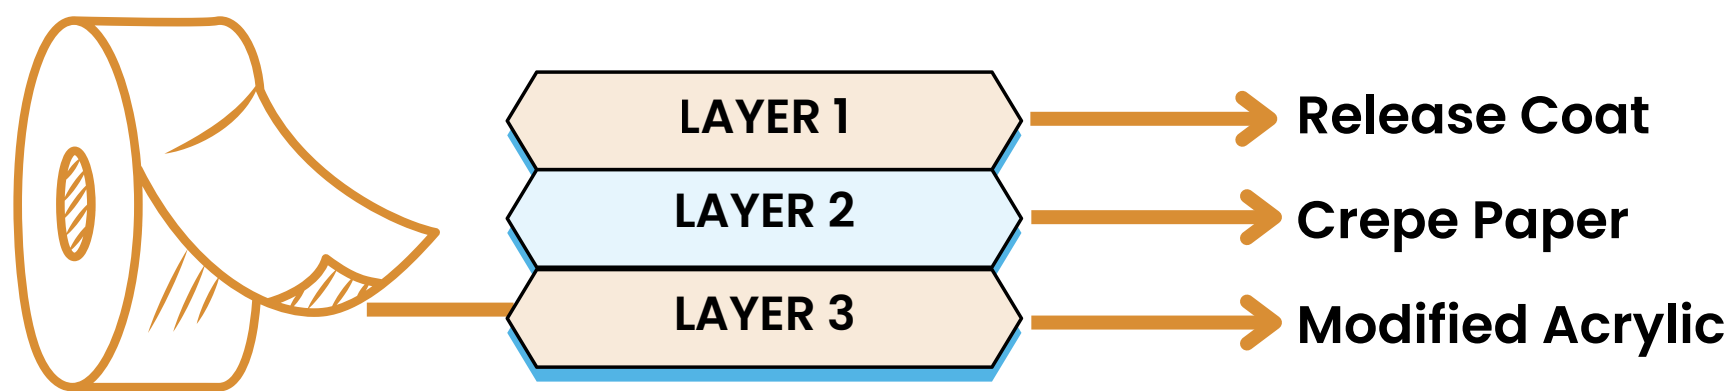

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Temperature Resistance
P5030	Crepe Paper	90μ	> 1440 mins	> 450 g/in	100° C x 60 mins

Colours	Slit Material	Jumbo Rolls
Yellow & Green	Width: 12 mm to 72 mm Length: 5 meters to 500 meters	Width: 1280 mm Length: 2000 meters

FEATURES

- Strong Crepe Paper
- Clean Removability
- 30 day residue free removal guaranteed
- UV Resistant
- Temperature resistance **100° C x 60 mins**

APPLICATION



Painting Jobs




Sharp Paint Lines



Automotive pinstriping



Woodworking




PE FINE LINE MASKING TAPE

Our Performance PE based Fine Line masking tape is one of the world's most flexible tapes with unique elasticity in both cross & machine directions. The tape conforms to almost any contour and shape without breaking. REACH complaint and non-toxic unlike traditional PVC fine line masking tapes



STRUCTURE

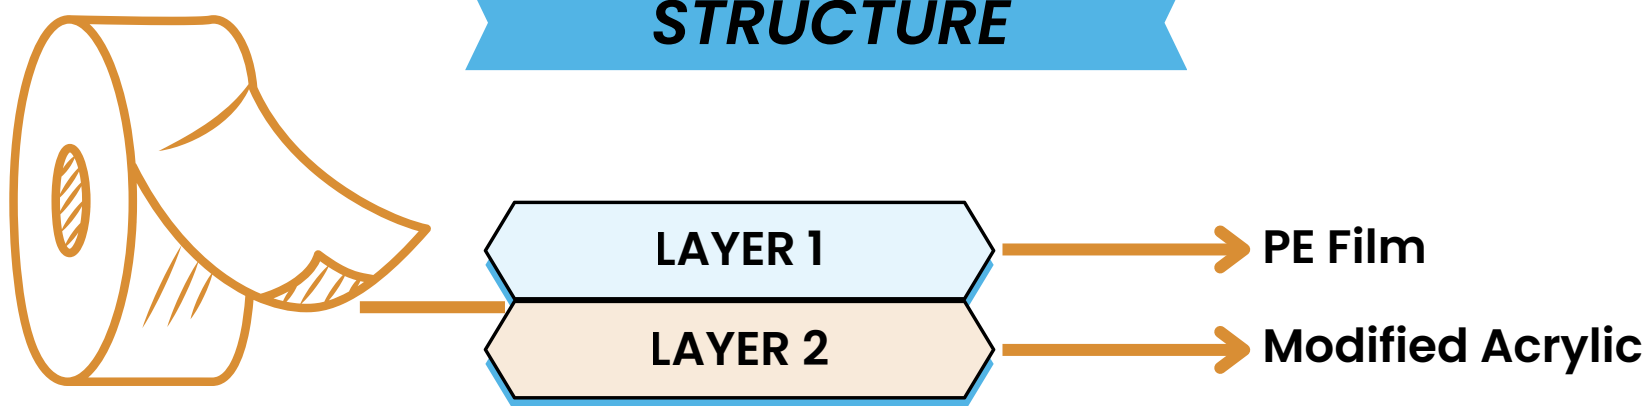

PERFORMANCE

Product Code	Backing	Total Thickness	Elongation	Peel	Temperature Resistance
PEFL105	PE Film	105µ	> 100%	> 600 g/in	80° C x 60 mins

Colours	Slit Material	Jumbo Rolls
Green & Custom colours	Width: 12 mm to 72 mm Length: 30 meters to 250 meters	Width: 1030 mm Length: 2000 meters

FEATURES

- High Tensile Strength
- Clean Removability
- Conforms well to curves and contours
- UV Resistant
- Temperature resistance **80° C x 60 mins**

APPLICATION



Painting Jobs



Sharp Paint Lines



Automotive pinstriping


FOAM TAPES



Why Roam? When you have Foam....

Our range of EVA Foam Tapes are used in insulation, light weight mounting and sound proofing industry. Our tapes provide high strength, substantial density & greater moisture resistance.

Can be offered in Single Side & Double Sided Adhesives




GASKET TAPE

Gasket Tape are used in sealing Electrical panels in industrial units and automobile units. High-quality EVA foam with strong acrylic adhesive for reliable adhesion and durability



STRUCTURE

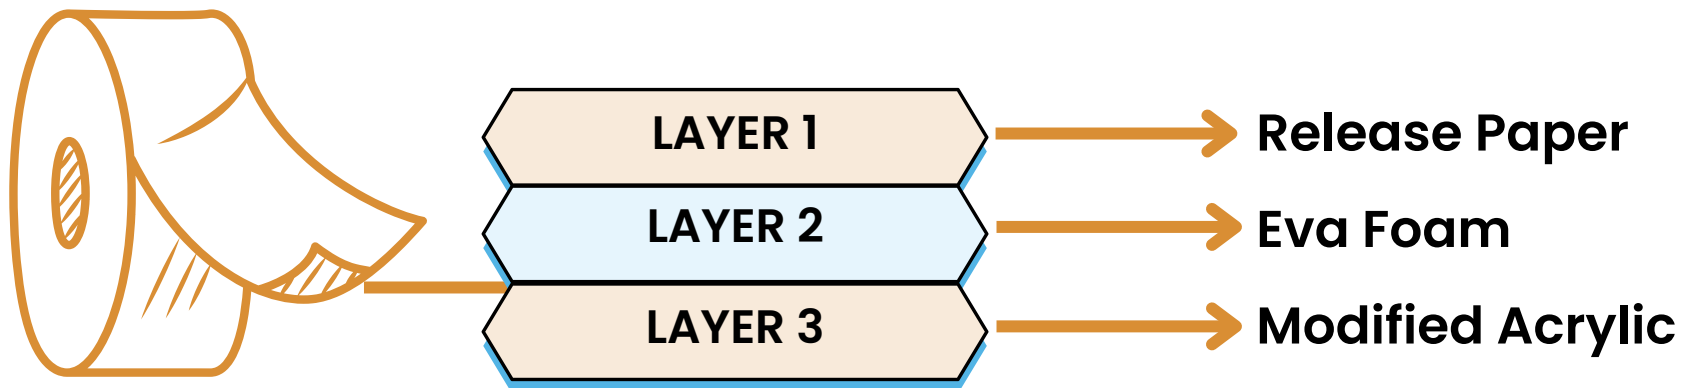

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFBA1	EVA Foam	1mm	< 8 cm	> 500 mins	> 600 g/in	> 1 kg/in	20%
SSFBB2	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFBB3	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFBB4	EVA Foam	4mm	< 8 cm	> 700 mins	> 800 g/in	> 2.2 kg/in	20%
SSFBB5	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%
SSFBB6	EVA Foam	6mm	< 8 cm	> 700 mins	> 800 g/in	> 3.2 kg/in	20%
SSFBB8	EVA Foam	8mm	< 8 cm	> 700 mins	> 800 g/in	> 4.2 kg/in	20%
SSFBB10	EVA Foam	10mm	< 8 cm	> 700 mins	> 800 g/in	> 5.2 kg/in	20%

Colours	Slit Material	Jumbo Rolls
Black	Width: 10 mm to 100 mm, Length: 10 meters	Width: 1020 mm, Length: 100 meters

FEATURES

- High strength acrylic adhesive for superior bonding
- Elastic foam for great cushioning
- Pinhole-free foam prevents leakage and ingress
- Easy to apply on variety of surfaces
- Extended shelf life


APPLICATION



Gasketing / Insulation
of Electrical Panels



Protection from
Sharp Edges




SPACER TAPE



Our spacer tape delivers consistent spacing, strong adhesion, and dependable sealing, ideal for glazing, sound proofing, and insulation with solid weather and wear resistance

STRUCTURE

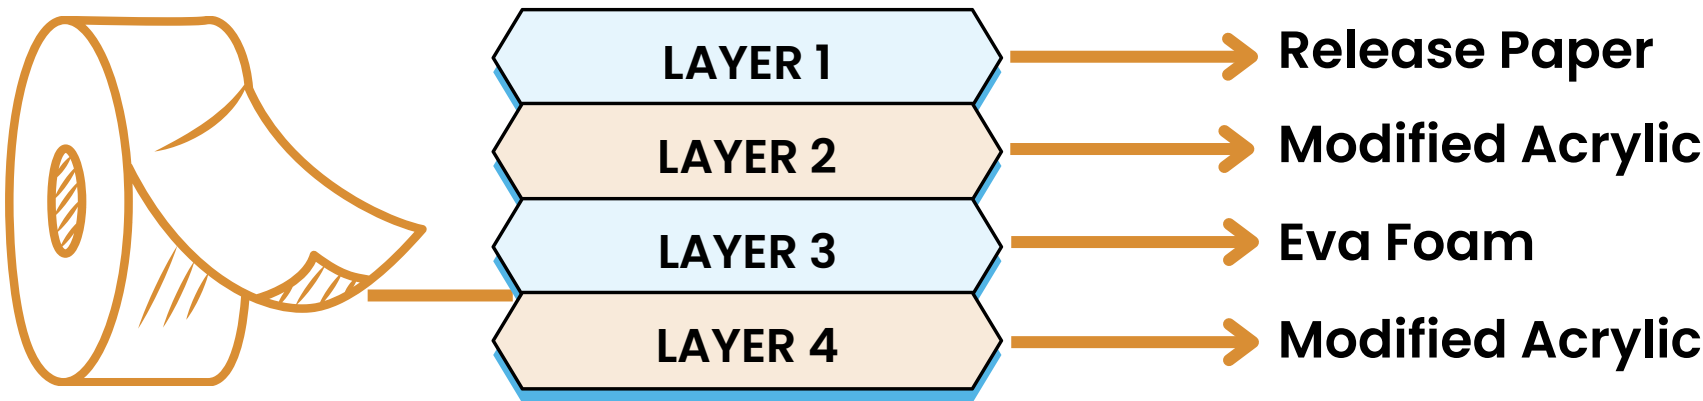

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
DSFBB2	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
DSFBB3	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
DSFBB4	EVA Foam	4mm	< 8 cm	> 700 mins	> 800 g/in	> 2.2 kg/in	20%
DSFBB5	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%
DSFBB6	EVA Foam	6mm	< 8 cm	> 700 mins	> 800 g/in	> 3.2 kg/in	20%
DSFBB8	EVA Foam	8mm	< 8 cm	> 700 mins	> 800 g/in	> 4.2 kg/in	20%
DSFBB10	EVA Foam	10mm	< 8 cm	> 700 mins	> 800 g/in	> 5.2 kg/in	20%

Colours	Slit Material	Jumbo Rolls
Black	Width: 10 mm to 100 mm, Length: 10 meters	Width: 1020 mm, Length: 100 meters

FEATURES

- High strength acrylic adhesive for superior bonding
- Elastic foam for great cushioning
- Pinhole-free foam prevents leakage and ingress
- Easy to apply on variety of surfaces
- Extended shelf life


APPLICATION



Structural Glazing & Sound Proofing



Thermal Insulation




EVA FOAM INSULATION TAPE

White EVA foam tape are used for heat insulation. These tapes are coated with modified acrylic adhesive for wide heat resistance. Service temperatures between **-10°C to 70°C**



STRUCTURE

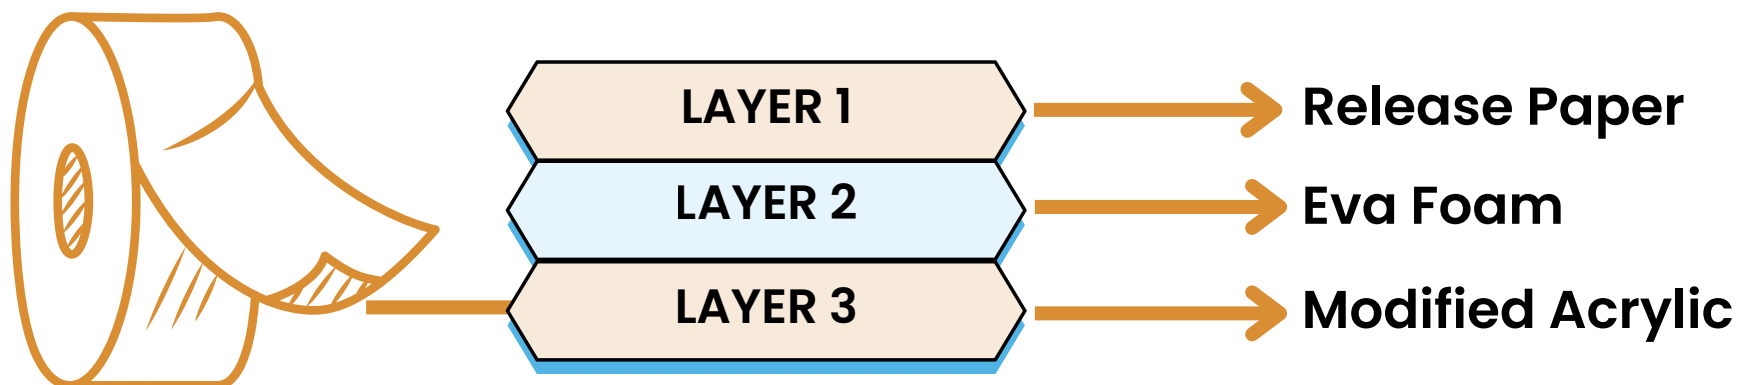

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	Elongation
SSFWB2	EVA Foam	2mm	< 8 cm	> 700 mins	> 800 g/in	> 1.2 kg/in	20%
SSFWB3	EVA Foam	3mm	< 8 cm	> 700 mins	> 800 g/in	> 1.7 kg/in	20%
SSFWB5	EVA Foam	5mm	< 8 cm	> 700 mins	> 800 g/in	> 2.7 kg/in	20%

Colours	Slit Material	Jumbo Rolls
White	Width: 10 mm to 100 mm Length: 10 meters	Width: 1020 mm Length: 100 meters

FEATURES

- Elastic foam for great cushioning
- High strength acrylic adhesive for superior bonding
- Easy to apply on variety of surfaces


APPLICATION



Light-Duty Electrical
Insulation Applications



Light-Duty Heat
Insulation Applications




DOUBLE SIDED MOUNTING TAPE



EVA Double Side Foam Mounting for arts, craft and lightweight mounting.
Choose from Hotmelt for temporary holding, acrylic for permanent holding

STRUCTURE

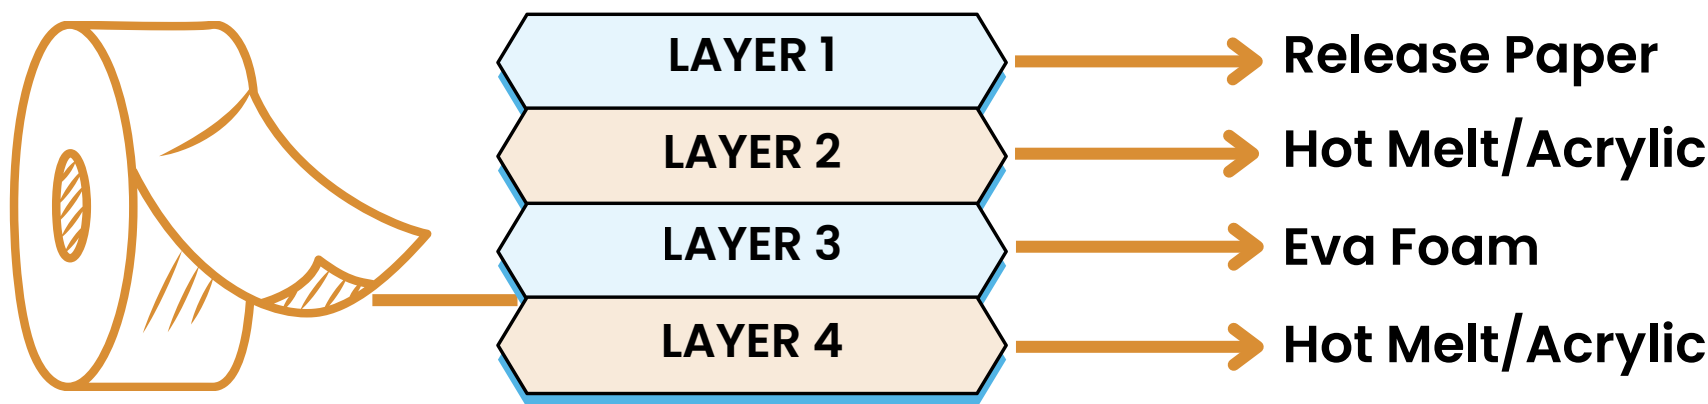

PERFORMANCE

Product Code	Backing	Backing Thickness	Tack	Holding Power 1" x 1" x 0.5 kg	Peel	Tensile	UV Resistance
DSFHM2	EVA Foam	2mm	< 7 cm	> 1000 mins	> 1500 g/in	> 2 kg/in	Low
DSFAB2	EVA Foam	2mm	< 7 cm	> 8000 mins	> 900g/in	> 2 kg/in	Very High

Colours	Slit Material	Jumbo Rolls
White	Width: 6 mm to 50 mm Length: 0.7 meters to 10 meters	Width: 1020 mm Length: 100 meters

FEATURES

- Elastic foam for great cushioning
- Strong adhesive for superior bonding
- Easy Unwind
- Easy to apply on variety of surfaces

APPLICATION




Light Mounting



DIY & Stationery



Cushioning




DS ACRYLIC FOAM TAPE

Our Acrylic Foam Tape offers strong, durable bonds to metals, plastics, and glass—ideal for permanent mounting in automotive, electronics, and construction applications



STRUCTURE

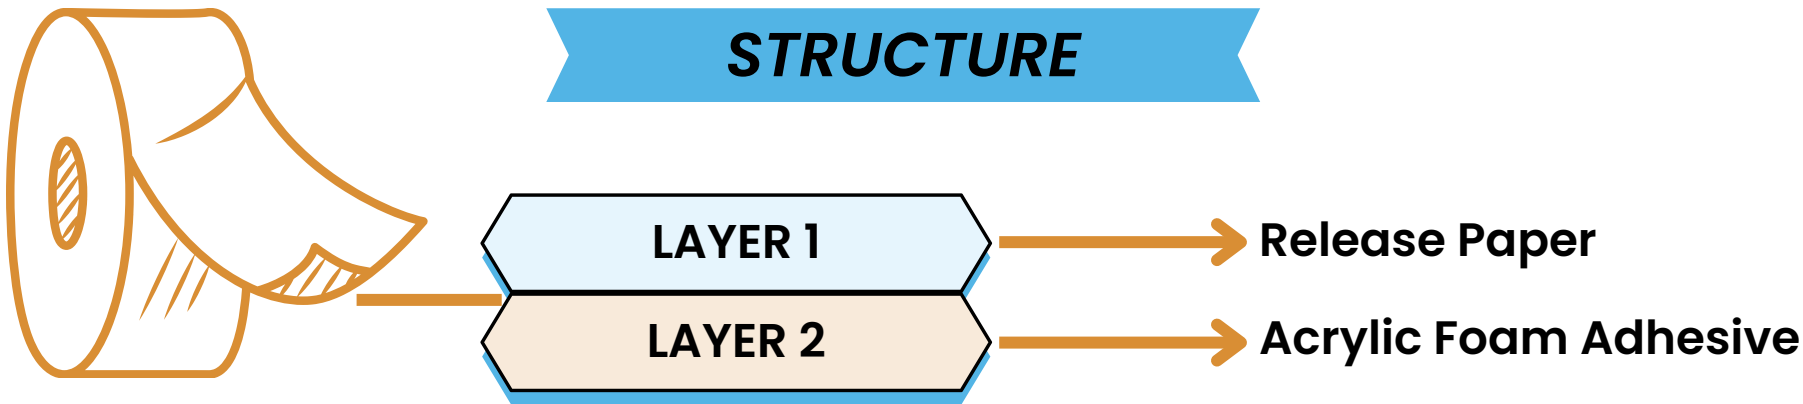

PERFORMANCE

Product Code	Backing	Backing Thickness	Holding Power	Peel	Temp Resistance (Short term)	Temp Resistance (Long term)
AFT0404	Foam	0.4 mm	> 10000 mins	> 2500 g/in	120° C	80° C
AFT0504	Foam	0.5 mm	> 10000 mins	> 2500 g/in	120° C	80° C
AFT0804	Foam	0.8 mm	> 10000 mins	> 3000 g/in	120° C	80° C
AFT1004	Foam	1 mm	> 10000 mins	> 3000 g/in	120° C	80° C
AFT2004	Foam	2 mm	> 10000 mins	> 3000 g/in	120° C	80° C

Colours	Slit Material	Jumbo Rolls
Grey & Clear	Width: 6 mm to 100 mm Length: Upto 33 meters	Width: 800 & 900 mm Length: 165, 330 & 561 meters

FEATURES

- Great resistance to ageing including wide range of temperatures, UV exposure, moisture / humidity, solvents and mild acids
- Excellent Static and Dynamic Shear, Great resistance to shock
- Superior Adhesion, Works best for surfaces such as metals, plastics, ceramics

APPLICATION



Automobile, electronics, advertisement, building and hardware industries



Solar Panel, Elevator Application, Window and Glass Works


SURFACE PROTECTION TAPES



Safeguard...
Protect...Shield...

Surface Protection Tapes are engineered to protect the toughest surfaces from scratches, chemicals, and UV damage

Apart from custom solutions, we have a wide standard product range for different surfaces



SURFACE PROTECTION TAPE



GENERAL PURPOSE SURFACE PROTECTION TAPE

Suitable for low gloss or low matt surfaces like glass, steel, wood, laminates, polycarbonate sheets etc.

FLOOR GUARD TAPE

Floor Guard provides protection to floors from mechanical damage, chemical resistance, and importantly resistance from scratches during construction activities

CARPET PROTECTION TAPE

Carpet Protection Tape shields carpets from dirt, wear, and damage during manufacturing and transit. It features a special adhesive that ensures clean, residue-free removal without pulling or damaging carpet fibers


LAMINATE PROTECTION TAPE

Laminate Protection Tape safeguards veneer, plywood, and laminates from scratches and damage during processing, handling, and transit

LOW PEEL PROTECTION TAPE

Low Peel Protection Tape is developed for highly reactive metal and high gloss surfaces. They are generally applied high pressure to adhere to the surface easily

Colours	Slit Material	Jumbo Rolls
Transparent or Custom Colours	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters

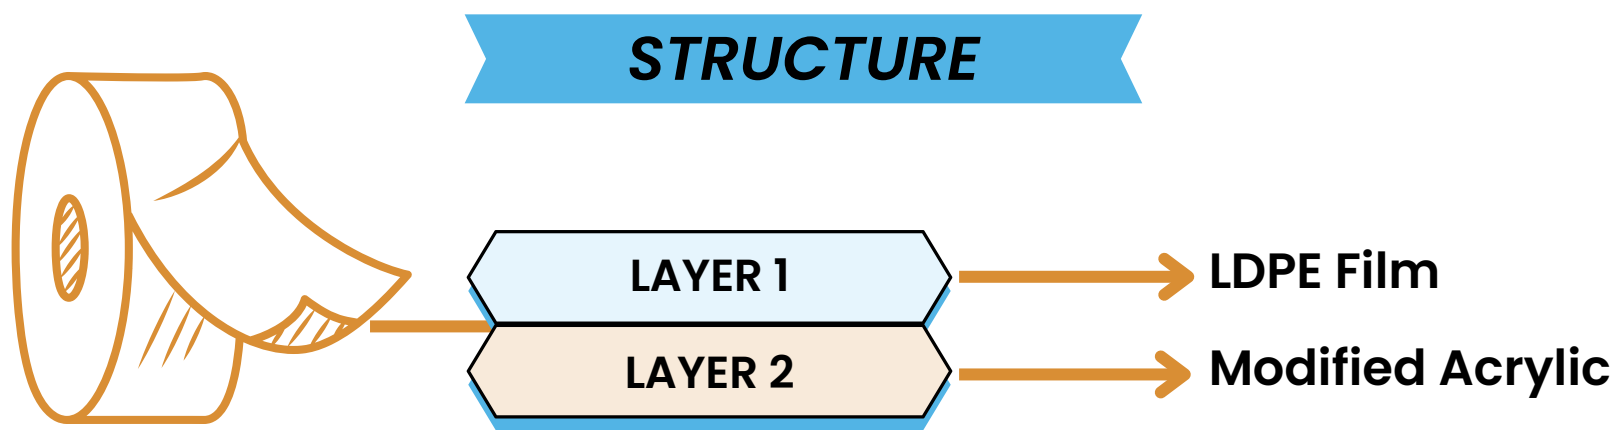

FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

PERFORMANCE

GENERAL PURPOSE SURFACE PROTECTION TAPE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
30NAT120P	Multi-Layer LDPE Film	31μ/1.24 mil	100-120 g/in	< 20 cm	2.3 kg/in	6 months
40NAT120P	Multi-Layer LDPE Film	41μ/1.64 mil	100-120 g/in	< 20 cm	3.1 kg/in	6 months

FLOOR GUARD TAPE


Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
95NAT120P	Multi-Layer LDPE Film	95μ/3.8 mil	100-120 g/in	< 20 cm	7.8 kg/in	6 months

CARPET PROTECTION & LAMINATE PROTECTION TAPE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
65NAT180P	Multi-Layer LDPE Film	66μ/2.64 mil	180-200 g/in	< 20 cm	5.05 kg/in	6 months

LOW PEEL PROTECTION TAPE


Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40NAT40P	Multi-Layer LDPE Film	41μ/1.64 mil	40-60 g/in	< 24 cm	3.1 kg/in	6 months



ALUMINIUM PANEL PROTECTION TAPE



AL panel protection films are designed for UV resistance & weathering to protect sensitive surfaces during construction activities

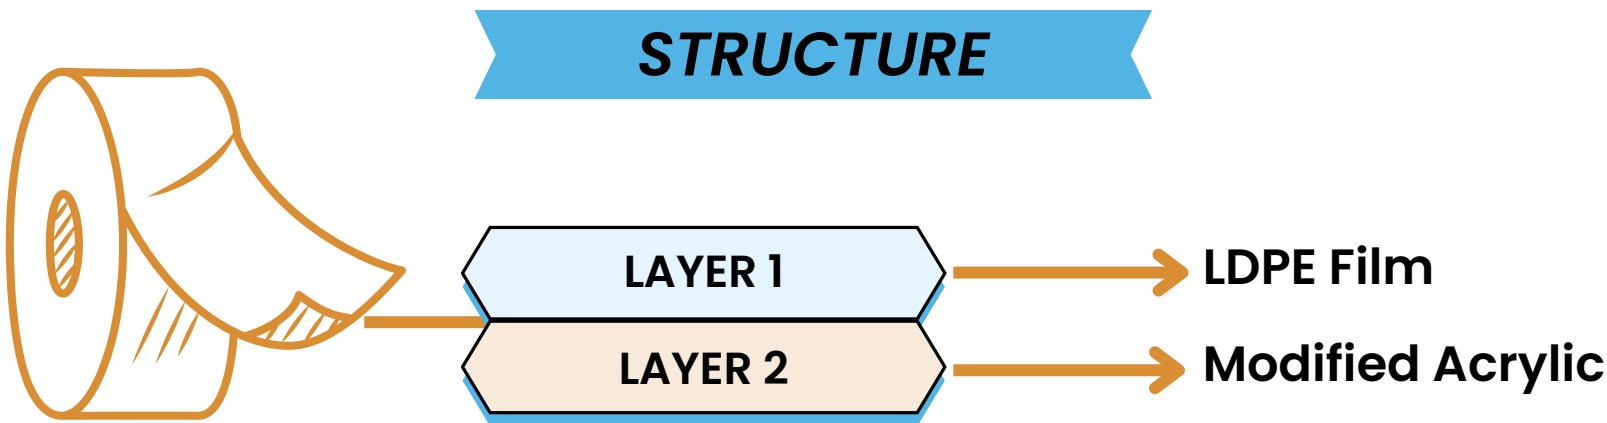

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Initial Tack	Tensile	Service Life
40BW120P	Multi-Layer LDPE Film	41µ/1.64 mil	100-120 g/in	< 24 cm	3.1 kg/in	3 moths
40BW80P	Multi-Layer LDPE Film	41µ/1.64 mil	60-80 g/in	< 24 cm	3.1 kg/in	3 moths
65BW120P	Multi-Layer LDPE Film	66µ/2.64 mil	100-120 g/in	< 20 cm	5.05 kg/in	6 months
65BW80P	Multi-Layer LDPE Film	66µ/2.64 mil	60-80 g/in	< 20 cm	5.05 kg/in	6 months

Colours	Slit Material	Jumbo Rolls
Black & White	Width: 1235 mm Length: 50 meters to 100 meters	Width: 1235 mm Length: 1000 meters


FEATURES

- Modified Acrylic Adhesive for stable Bonding
- Easy to apply and remove on variety of surfaces
- Cross-Linked formulation to prevent Gum-Transfer or Peel-Gain
- Easy peel off

APPLICATION




Designed for use on anodized or powder-coated aluminum surfaces



PRINTING OPTIONS


Reverse Print

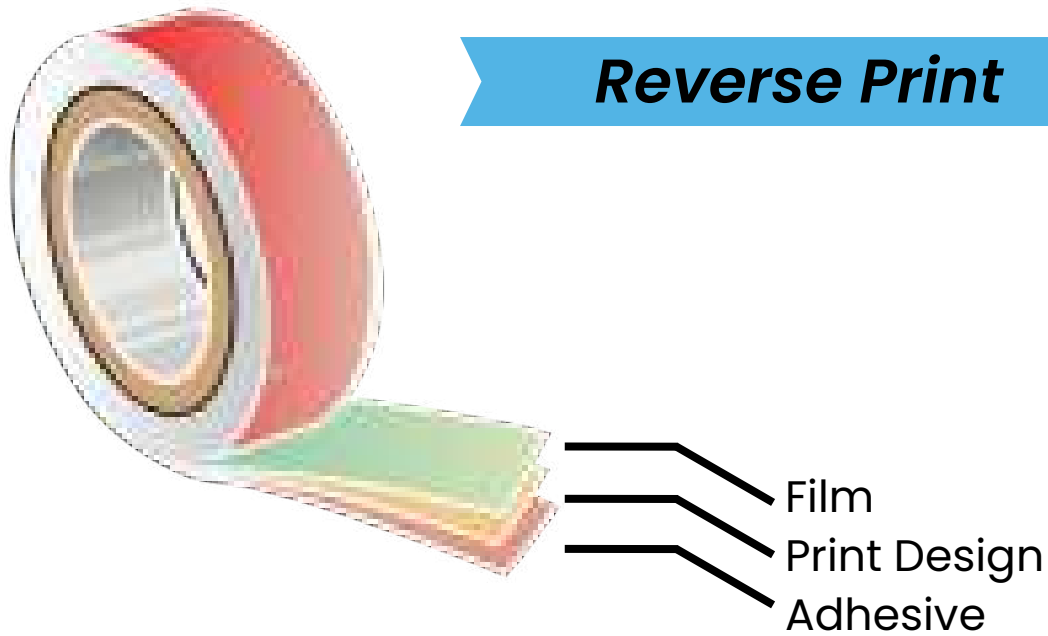

Features

- Print does not smudge or smear during handling
- Premium glossy look
- Suitable for short term applications with clear film only.


Surface Print

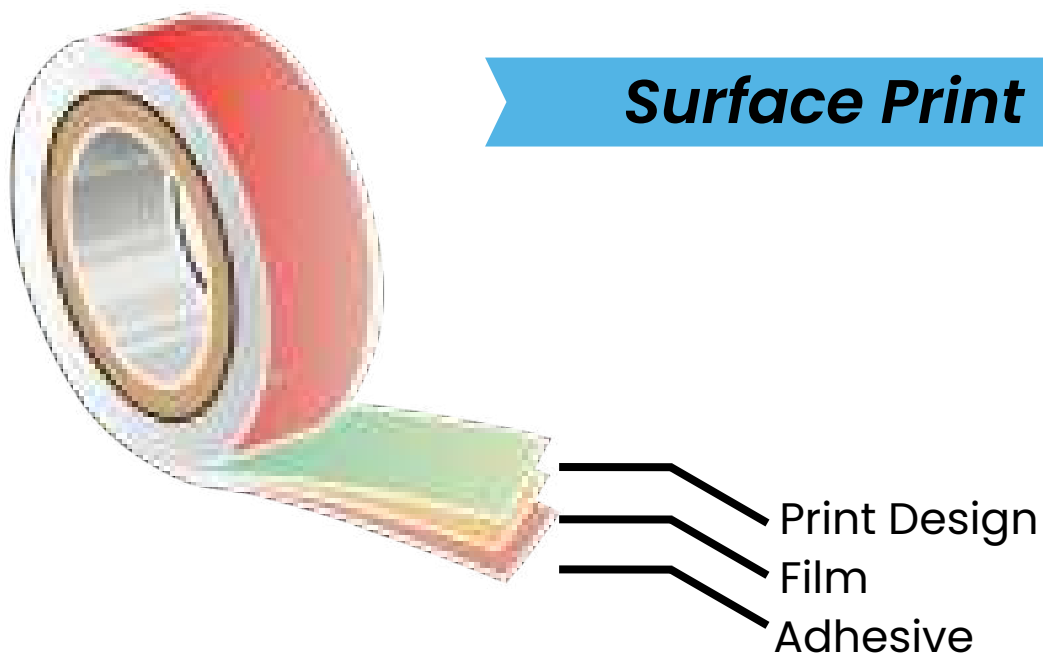

Features

- For opaque coloured films
- longer shelf life
- suitable for medium to long term application


Sandwich Laminate

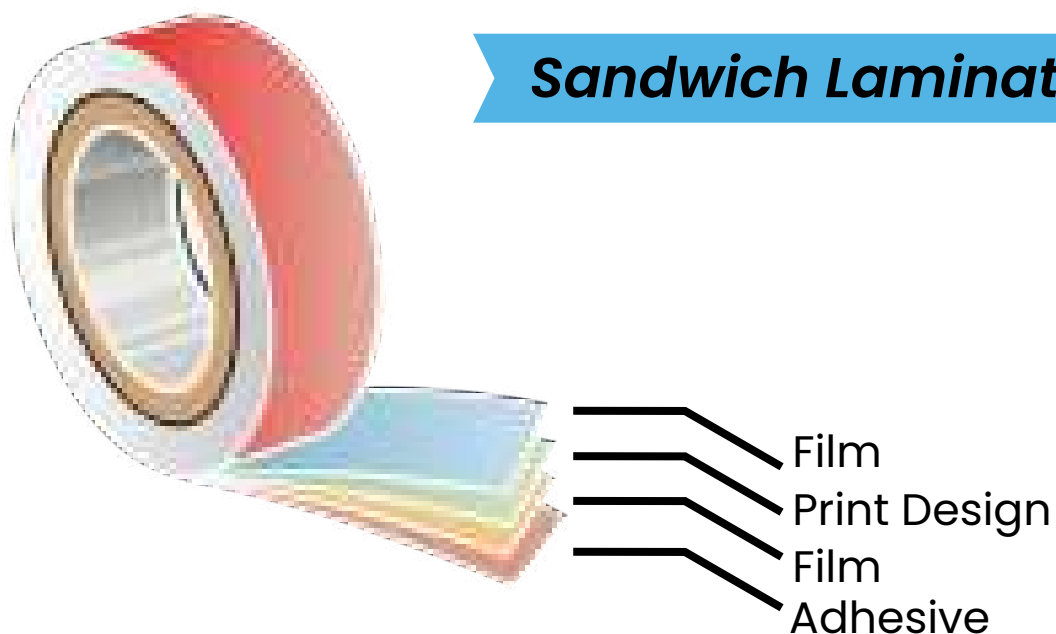

Features


- Extreme resistance to scuffs & abrasion
- Premium glossy look
- Suitable for very long term applications
- Works for both clear and opaque films

REINFORCED TAPES

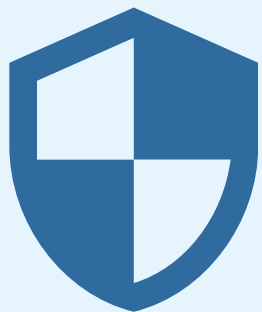

Strong...Unbreakable...
Versatile...

Engineered for various applications, these tapes have high strength backings that can be used in Sealing, Packing and Bundling of the heaviest substances




DUCT TAPE

Duct Tape or Cloth Tape is a durable tape with sturdy backing. It is water resistant, strong, easy to tear, & a flexible tape



Very useful for quick repairs and fixes, that require a strong adhesive bonding

STRUCTURE

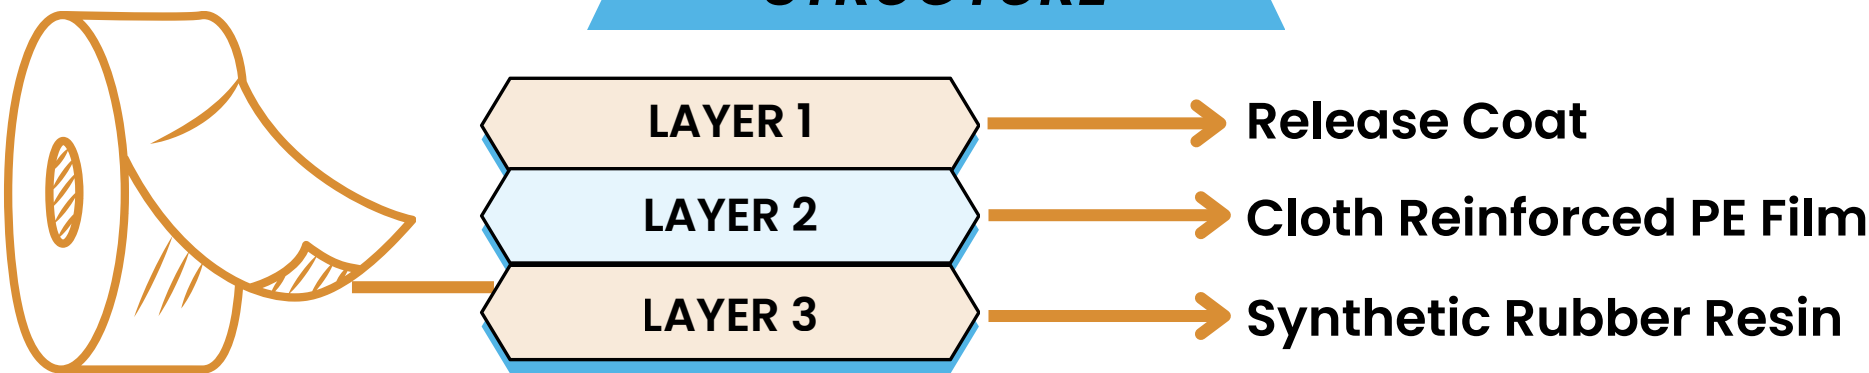

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DT130	PE Film + Reinforced Woven Cloth	130µ/5.2 mil	> 1500 mins	> 1200 g/in	12%	> 30 N/in	- 20° C to 60° C
DT150	PE Film + Reinforced Woven Cloth	150µ/5.6 mil	> 1500 mins	> 1200 g/in	12%	> 55 N/in	- 20° C to 60° C
DT170	PE Film + Reinforced Woven Cloth	150µ/5.6 mil	> 2000 mins	> 1500 g/in	12%	> 75 N/in	- 20° C to 60° C
DT230	PE Film + Reinforced Woven Cloth	150µ/5.6 mil	> 3000 mins	> 2000 g/in	12%	> 80 N/in	- 20° C to 60° C

Colours	Slit Material	Jumbo Rolls
Silver, Black, White, Red, Green, Dark Blue, Yellow	Width: 24 mm to 96 mm Length: 10 meters to 50 meters	Width: 1060 mm Length: 1500 meters

FEATURES

- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance

APPLICATION




Bundling & Packing of Heavy Objects



Pipe Wrapping & Carpet Fixing



HVAC Ducting – Seam and Joints sealing




CROSS FILAMENT TAPE

Cross Filament is a high tensile, cross-weaved reinforced tape. The tapes have high adhesion, excellent resistance to break, and high safety in application



STRUCTURE

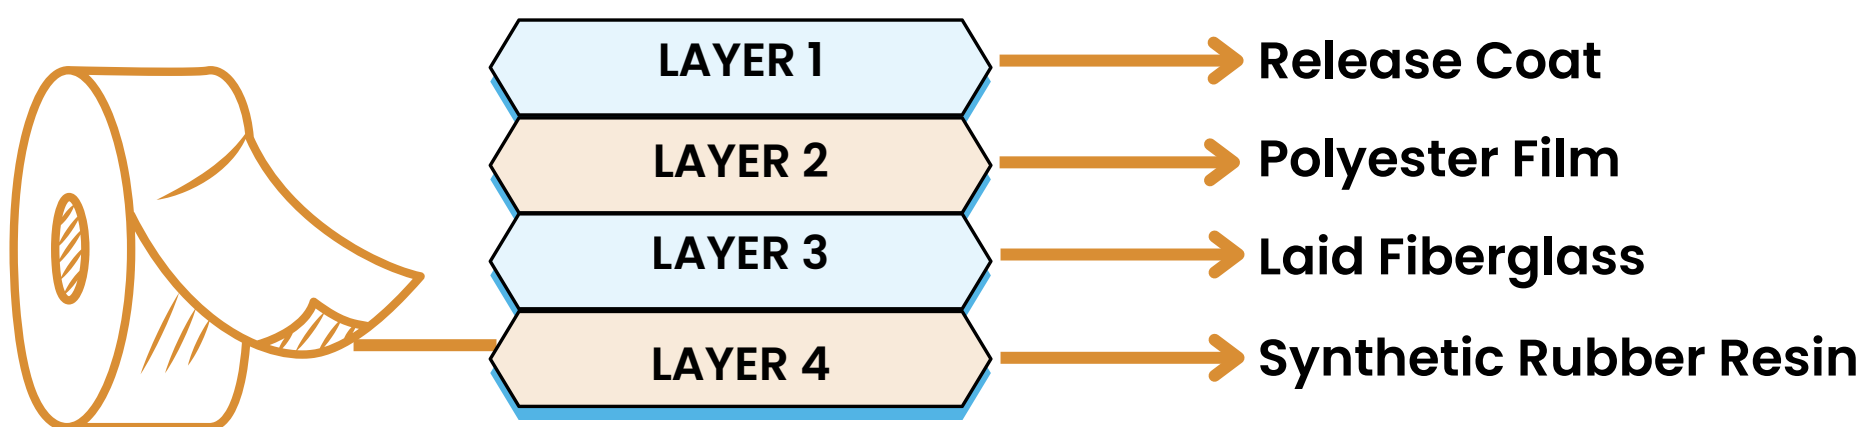

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
CFT140	Reinforced PET Film	140μ/5.6 mil	> 1500 mins	> 1850 g/in	12%	> 40 kg/in	- 5° C to 70° C

Colours	Slit Material	Jumbo Rolls
Transparent	Width: 24 mm to 72 mm Length: 20 meters to 50 meters	Width: 1060 mm Length: 1000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength


APPLICATION



Bundling of Heavy Objects like Pallets & Steel Coils



As a Bag-Tearing Tape




MONO FILAMENT TAPE



Mono Filament is a high tensile strength, mono-directional reinforced tape. The tapes have high adhesion, excellent resistance to break, and high safety in application

STRUCTURE

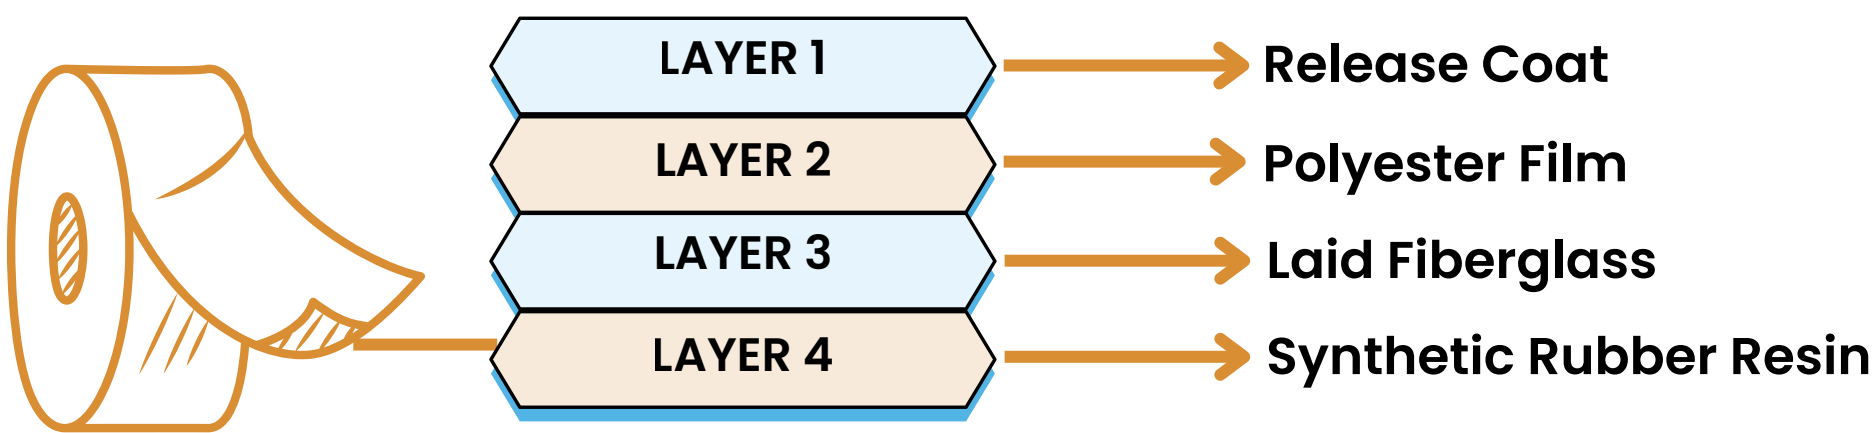

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
MFT120	Reinforced PET Film	120μ/4.8 mil	> 1500 mins	> 2350 g/in	5%	> 36 kg/in	- 5° C to 70° C

Colours	Slit Material	Jumbo Rolls
Transparent	Width: 24 mm to 72 mm Length: 20 meters to 50 meters	Width: 1060 mm Length: 1000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength

APPLICATION



Bundling of Heavy Objects like Pallets & Steel Coils



As a Bag-Tearing Tape




WOVEN HDPE FABRIC TAPE



HDPE Fabric Tape is made of cross-weaved fabric with a special grade of synthetic rubber adhesive

The tape adheres well to all surfaces and offer excellent strength

STRUCTURE

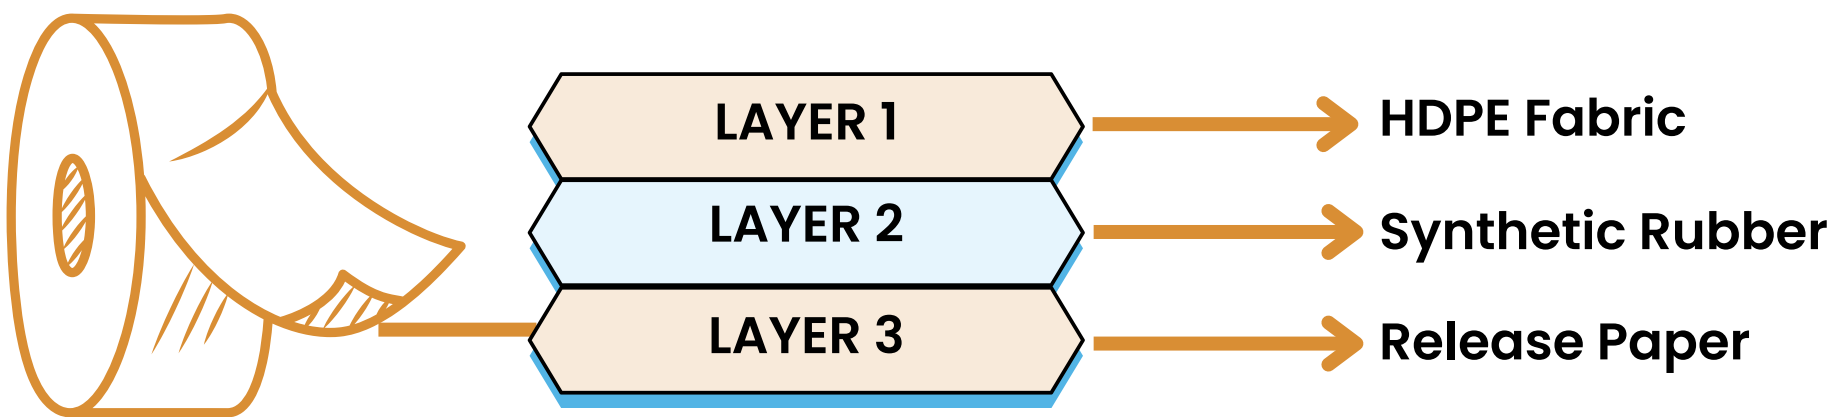

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
HDPE170	HDPE Fabric	170µ/6.8 mil	> 1500 mins	> 2300 g/in	< 5%	> 70 N/in	- 20° C to 60° C

Colours	Slit Material	Jumbo Rolls
Black/White/Blue	Width: 24 mm to 96 mm Length: 20 meters to 50 meters	Width: 1010 mm Length: 750 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- Excellent Moisture Resistance and conformity on Irregular Surfaces
- High Resistance to Abrasion, Impact-Resistance
- It has fast stick ability and good Tensile Strength

APPLICATION




Bundling & Packing of Heavy Objects & Cartons



Packing & Sealing HDPE Sacks


POLYESTER TAPES

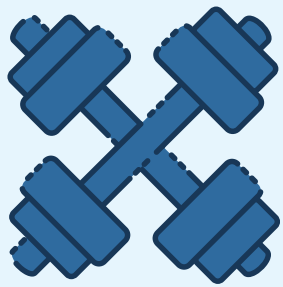

*Any Time... Any Place...
Polyester Tape...*

Polyester Tapes are suited to various applications which require high tensile strength, and resistance to aging and temperature

PET tape is used for technical and general-purpose splicing, bonding, protection, and masking applications




PET HOLDING TAPE

Polyester Holding Tape with a strong film and adhesive strength has easy applicability and removability. It can be used at room temperature and low to medium temperature holding applications



STRUCTURE

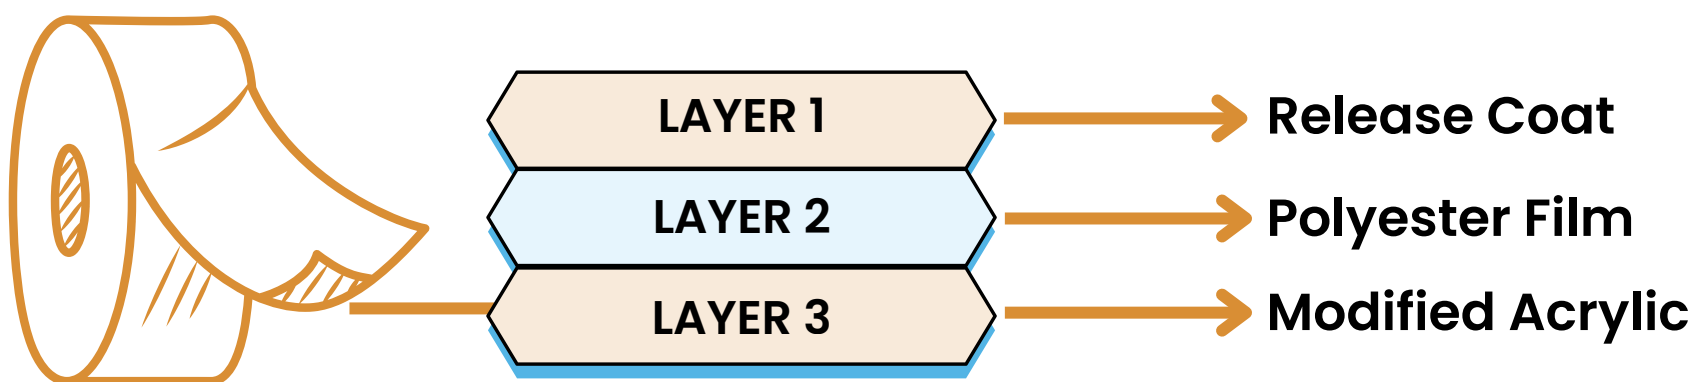

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
PETHT45	PET Film	45µ/1.8 mil	> 3000 mins	> 650 g/in	100%	> 6 kg/in	- 10° C to 100° C
PETHT55	PET Film	55µ/2.2 mil	> 3000 mins	> 650 g/in	100%	> 7 kg/in	- 10° C to 100° C

Colours	Slit Material	Jumbo Rolls
Light Blue & Custom Colour	Width: 24 mm to 72 mm Length: 30 meters to 65 meters	Width: 1220 mm Length: 2000 meters

FEATURES

- Strong Adhesion, High Tack, Peel, and Holding Power
- High Resistance
- Conformity on Irregular Surfaces
- It has fast stick and good Tensile Strength

APPLICATION



Holding Applications



Bonding Applications



Masking Applications




DOUBLE SIDED POLYESTER TAPE



DS polyester tape is designed for medium to heavy-duty bonding, mounting, and splicing. Offers excellent shear strength, temperature resistance, and adhesion to plastics, metals, foams, and films

Available in white/havana paper release liner and red filmic liner

STRUCTURE

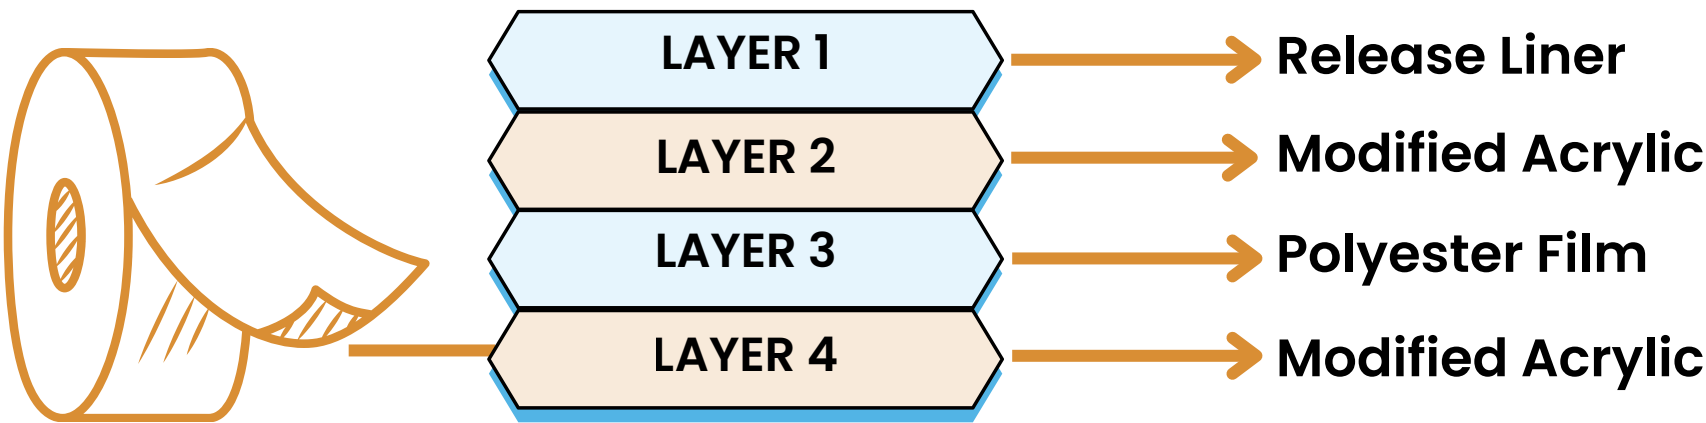

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
DSPET105	PET Film	105µ/4.2 mil	> 5000 mins	> 1000 g/in	100%	> 6 kg/in	-10° C to 100° C
RL105	PET Film	105µ/4.2 mil	> 5000 mins	> 1000 g/in	100%	> 6 kg/in	-10° C to 100° C
RL160	PET Film	160µ/4.4 mil	> 5000 mins	> 1200 g/in	100%	> 6 kg/in	-10° C to 100° C
RL205	PET Film	205µ/8.2 mil	> 5000 mins	> 1300 g/in	100%	> 6 kg/in	-10° C to 100° C

Tape Colours	Slit Material	Jumbo Rolls
Clear, White & Red	Width: 12 mm to 96 mm Length: 20 meters to 100 meters	Width: 1220 mm Length: 2000 meters


FEATURES

- Strong adhesion, high tack, peel, and holding power
- Excellent conformity on irregular surfaces
- High temperature resistance
- It has fast stick and good tensile strength

APPLICATION



Heavy Duty Splicing & Mounting Applications




KAPTON/POLYIMIDE TAPE



Kapton (Polyimide) Tape is used for high-temperature masking and electrical insulation. It withstands high heat, up to around 260°C, and has high dielectric strength for reliable insulation. It is used for electrical insulation of coils, transformers and motors, magnet wire wrapping, masking during wave soldering, and PCB protection

STRUCTURE

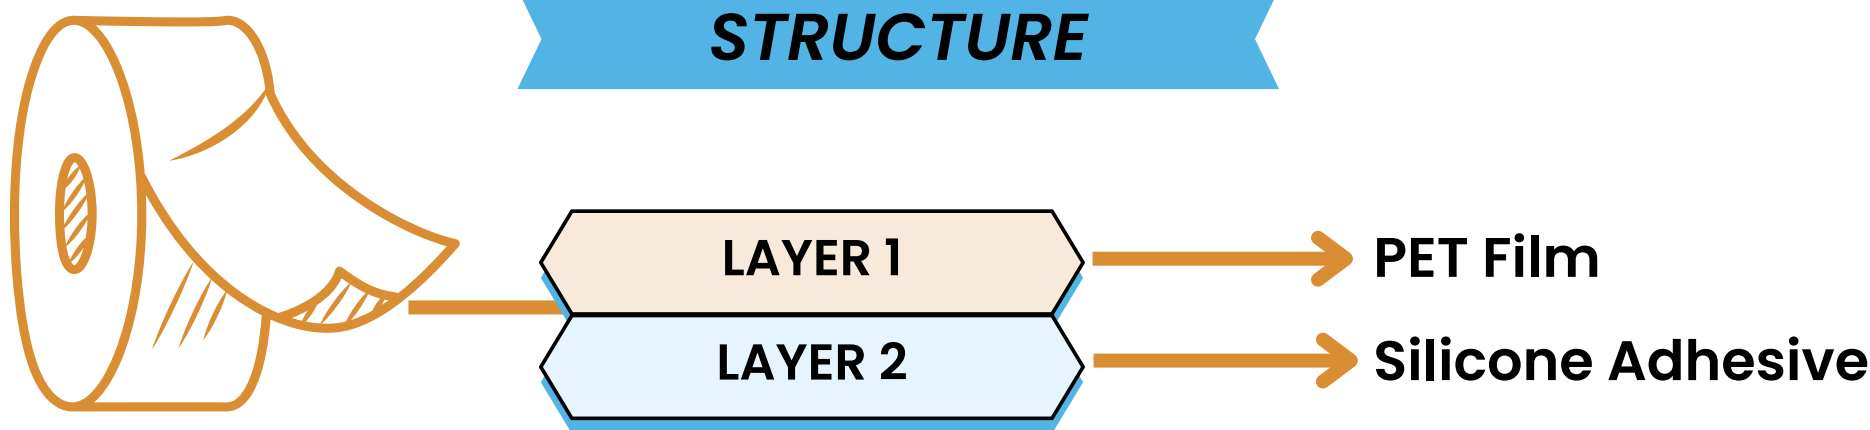

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Service Temp
KPT60	PET Film	60μ	> 500 g/in	-73°C ~ 260°C

Colours	Slit Material
Brown	Width: 12 mm to 100 Length: 20 meters to 100 meters

FEATURES

- High temperature resistance, up to around 260°C
- High dielectric strength for reliable electrical insulation
- Resists chemicals, tearing, puncture and abrasion
- Thin, flexible, conforms to different shapes
- Clean removal


APPLICATION



Electrical insulation of coils, transformers and motors



Masking during wave soldering, and PCB protection




MYLAR TAPE

Mylar Tape is used for electrical insulation and identification. It offers high dielectric strength, good tensile strength, tear resistance, and resists moisture and chemicals. Its red colour makes it easy to use for colour-coding and positioning



STRUCTURE

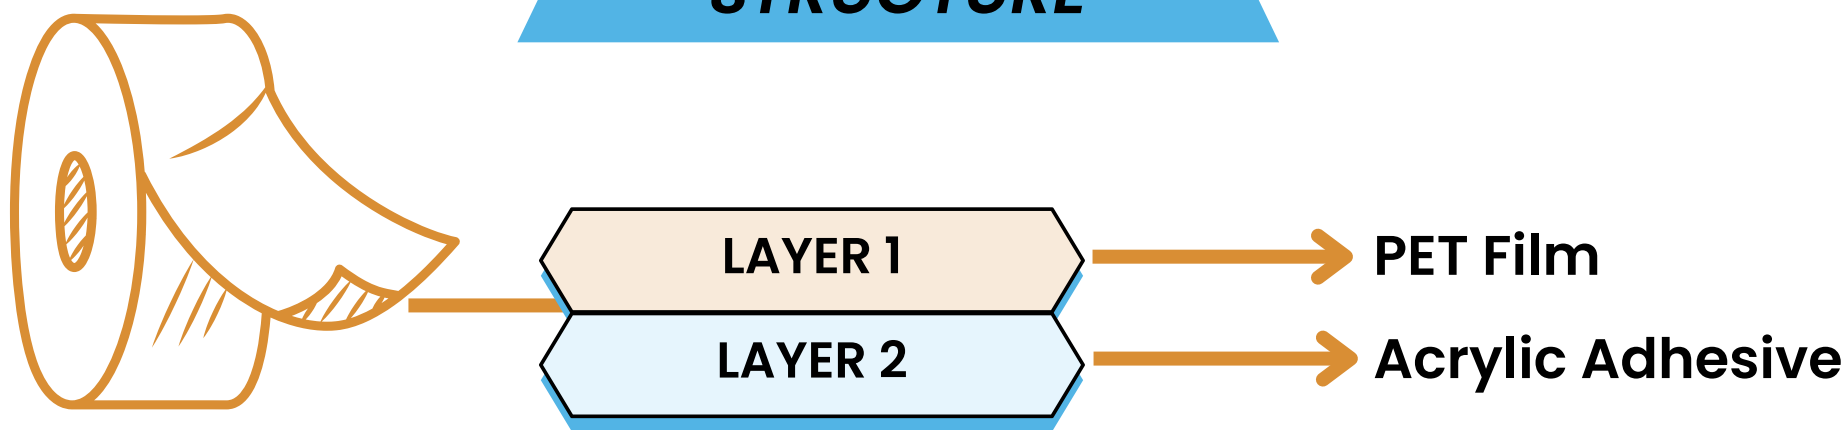

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Service Temp
PETSA	PET	50μ	> 850 g/in	-20°C ~ 160°C

Colours	Slit Material
Red	Width: 24 mm to 100 Length: 20 meters to 100 meters

FEATURES

- High temperature resistance, up to 160°C
- Resists chemicals and moisture
- High tensile strength, tear and puncture resistant
- Good abrasion resistance and long ageing life
- Flame Retardant


APPLICATION



Insulating and wrapping transformers, motors and capacitors



High-voltage isolation between circuit boards & casings in power supplies




RECYLED PLASTIC TAPE



Recycled PET tape contains over 85% Polyester from recycled PET bottles, creating a demand for recycling, which otherwise would spend 100s of years in landfills. Thinner tapes with increased strength and up to 15% lower plastic use per tape

STRUCTURE

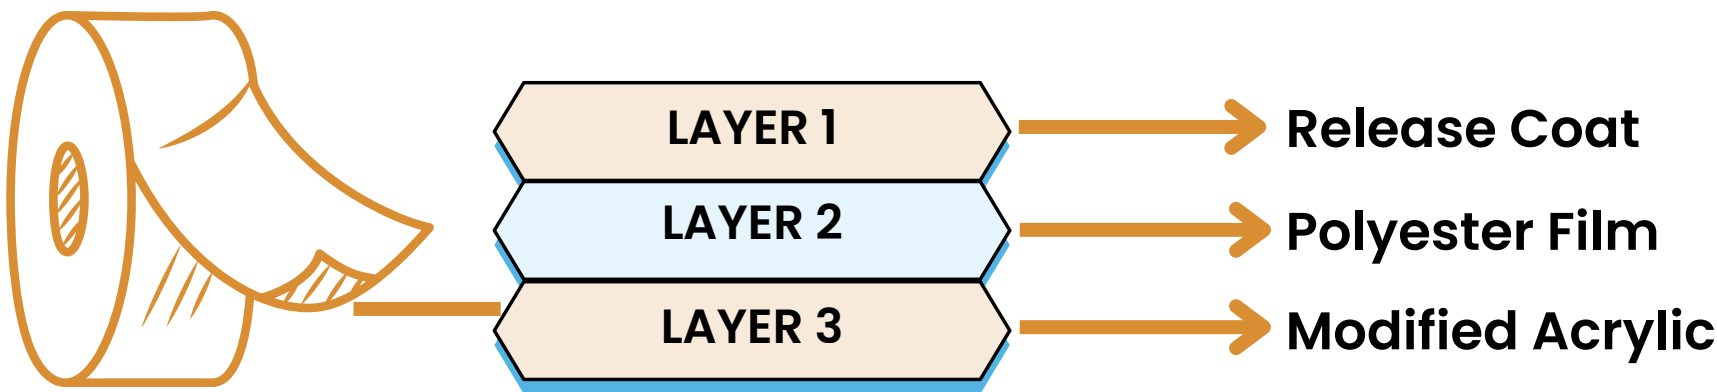

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power	Peel	Elongation	Tensile	Service Temperature
PCR12	PET Film	32µ/1.28 mil	> 2000 mins	> 600 g/in	100%	> 4 kg/in	- 10° C to 100° C
PCR18	PET Film	38µ/1.52 mil	> 2000 mins	> 600 g/in	100%	> 4.6 kg/in	- 10° C to 100° C

Colours	Slit Material	Jumbo Rolls
Clear & Custom Colour	Width: 24 mm to 72 mm Length: 30 meters to 2000 meters	Width: 1220 mm Length: 2000 meters

FEATURES

- 85% Post-Consumer Recycled (PCR) PET backing
- Offers excellent printability
- Suitable for manual and automatic dispensing

APPLICATION




Light-Medium Duty Packaging



General Bonding & Sealing


ALUMINIUM FOIL TAPE

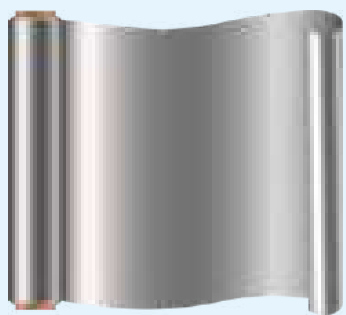

Let the Aluminium Foil Tape do the Working!

Aluminum Foil Tapes perform marvelously under extreme cold or hot temperatures. They provide an excellent vapor barrier and easily conform to irregular surfaces

It is ideal for heat shielding, heat reflecting, chemical masking & HVAC operations




ALUMINIUM FOIL TAPE



Aluminum Foil Tape uses Aluminium Foil as backing material and is composed of one side with Acrylic Adhesive. The tape possesses excellent Electric and Heat Conductivity

STRUCTURE

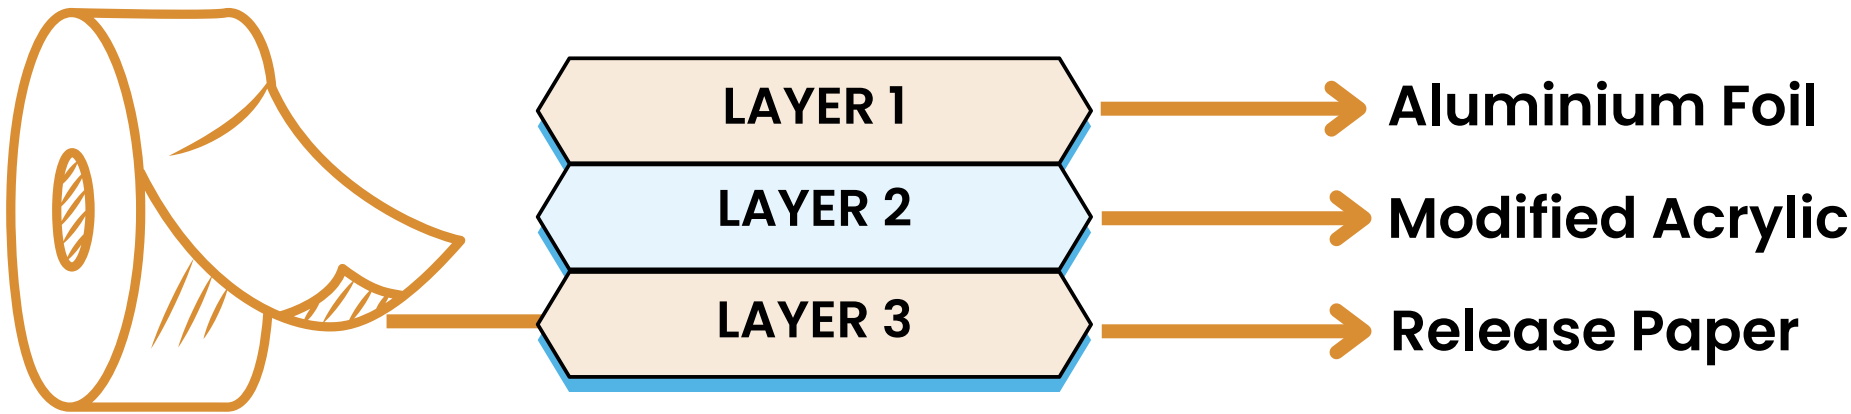

PERFORMANCE

Product Code	Backing	Backing Thickness	Total Thickness	Peel	Tensile	Temperature Resistance
ALU20LIN	Aluminium Foil	20μ	45μ/1.8 mil	> 550 g/in	> 3.6 kg/in	-10° C to 110° C
ALU30LIN	Aluminium Foil	30μ	65μ/2.6 mil	> 650 g/in	> 4.5 kg/in	-10° C to 110° C
ALU40LIN	Aluminium Foil	40μ	75μ/3.0 mil	> 650 g/in	> 6 kg/in	-10° C to 110° C
ALU50LIN	Aluminium Foil	50μ	85μ/3.4 mil	> 650 g/in	> 7 kg/in	-10° C to 110° C

Colours	Slit Material
Silver	Width: 24 mm to 72 mm Length: 15 meters to 50 meters

FEATURES

- Very High Vapor Barrier
- Good Heat Conductivity
- Easy to Unwind and Tear
- Good Electrical Conductivity
- UV Resistant
- Strong Holding Power

APPLICATION




Sealing joints and seams of irregular metal surfaces



HVAC, refrigerator industry and metal patching



Shielding application for motors, cables, cabinets, antennae




ALU-PET TAPE



Aluminum foil laminated with strong PET film offers excellent conductive bottom surface and a high heat dissipation due to the PET surface. Modified acrylic adhesives works on a wide temperature range and is ideal for permanent adhesion

STRUCTURE

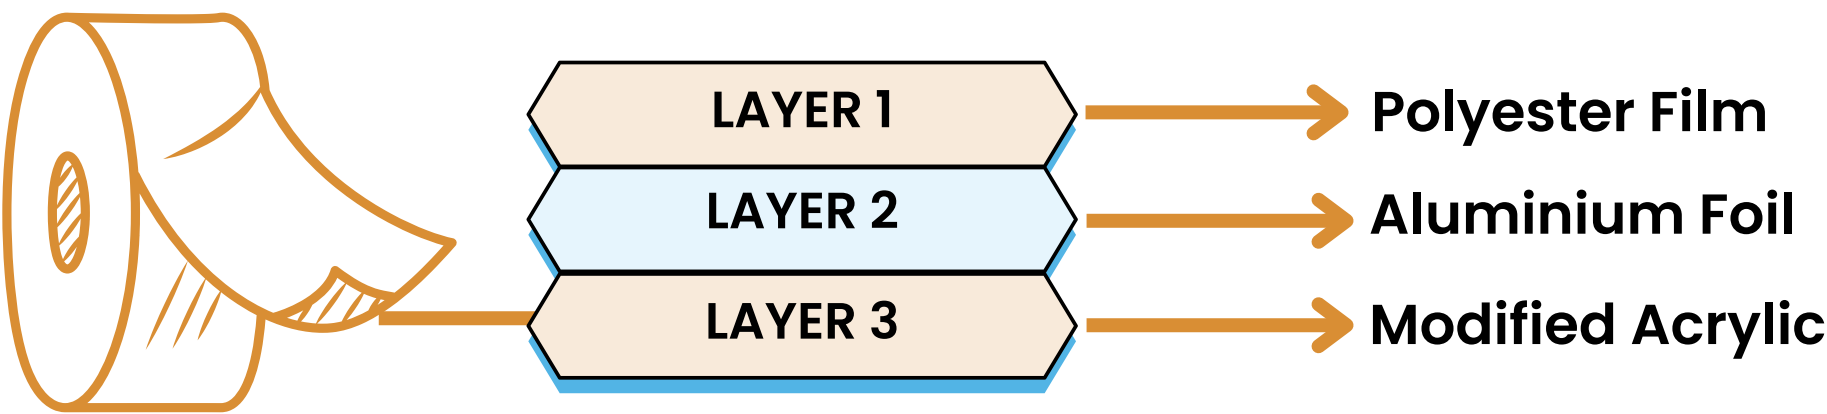

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Temperature Resistance
ALUPET50LIN	Foil + PET	50μ	> 750 g/in	-20° C to 110° C
ALUPET50	Foil + PET	50μ	> 750 g/in	-20° C to 110° C
ALUPET80	Foil + PET	80μ	> 750 g/in	-20° C to 110° C

Colours	Slit Material
Silver	Width: 24 mm to 72 mm Length: 15 meters to 50 meters

FEATURES

- Very High Vapor Barrier
- Good Heat Conductivity
- Easy to Unwind and Apply
- Excellent Heat Dissipation
- UV Resistant
- Strong Holding Power

APPLICATION




Sealing FSK Facing laminated fiberglass blanket



HVAC, refrigerator industry and metal patching



Sealing flexible air duct seams and joints




FSK TAPE

FSK tape is engineered with a reinforced fiberglass scrim sandwiched between aluminum foil and kraft paper, the tape delivers good tear resistance and an extreme vapour barrier. Coated with aggressive acrylic adhesive, it grabs instantly and holds permanently on every joint and seam



STRUCTURE

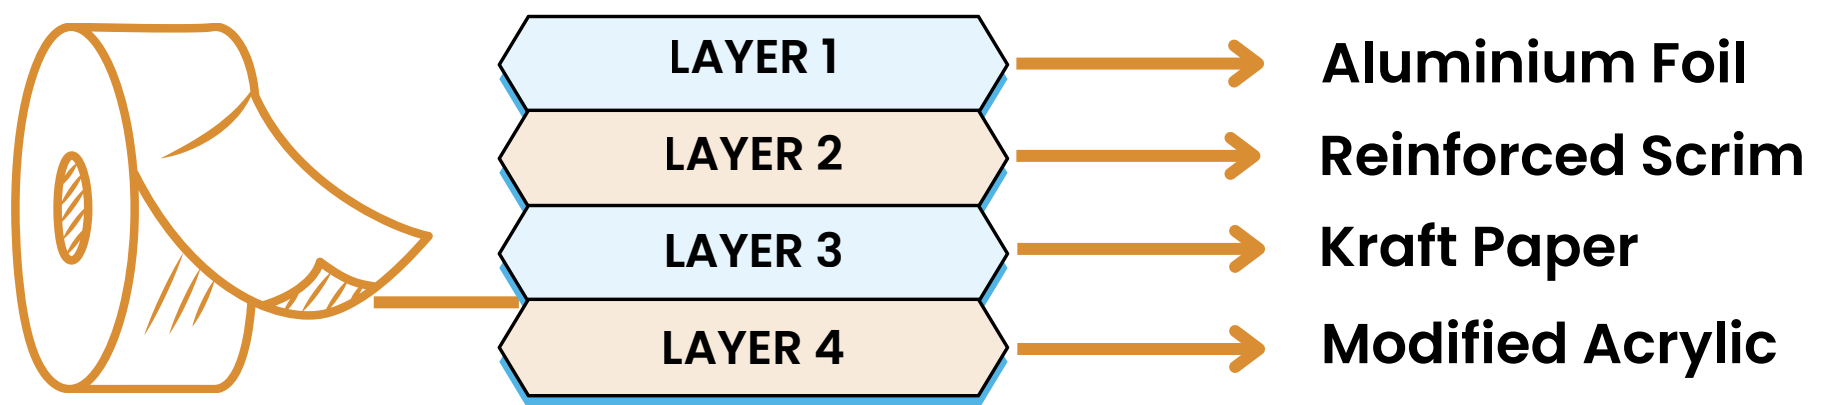

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Tensile Strength	Service Temperature
FSK750	Foil + Scrim + Kraft Paper	140μ	> 750 g/in	> 120 N/inch	-35° C to 80° C

Colours	Slit Material
Silver	Width: 48 mm to 96 mm Length: 15 meters to 100 meters

FEATURES

- Very High Vapor Barrier
- Good Heat Conductivity
- Strong Holding Power
- Excellent Heat Dissipation
- Superior Tensile Strength
- UV Resistant

APPLICATION




Sealing FSK Facing laminated fiberglass blanket



HVAC & Sealing structural duct board joints



Sealing flexible air duct seams and joints




ALU-GLASS TAPE



Alu Glass Tape is built for demanding, high-temperature applications. Strong fibreglass cloth laminated to aluminium foil delivers radiant heat reflection, a reliable vapor barrier, and tear resistance. The aggressive hot melt adhesive bonds instantly and holds firmly across joints and seams

STRUCTURE

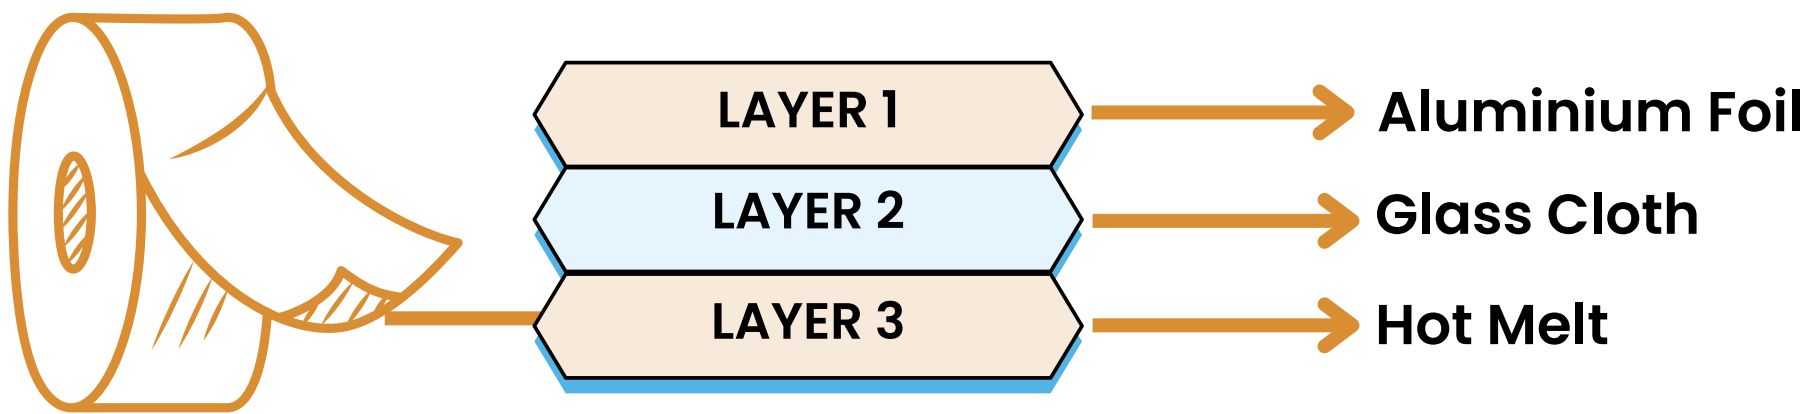

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Tensile Strength	Service Temperature
AGC775	Foil + Glass Cloth	140μ	> 1000 g/in	> 200 N/inch	-30° C to 120° C

Colours	Slit Material
Silver	Width: 48 mm to 96 mm Length: 15 meters to 100 meters

FEATURES

- Very High Vapor Barrier
- Good Heat Conductivity
- Strong Holding Power
- Excellent Heat Dissipation
- Superior Tensile Strength

APPLICATION



Sealing FSK Facing laminated fiberglass blanket



HVAC & Sealing structural duct board joints



Sealing flexible air duct seams and joints


MARKING & WARNING TAPES



Marking & Warning Tape, Stays On & On & On....

Marking or Warning Tape is used across many industries in demarking areas & to catch the attention of the passersby


We offer our PVC Floor Marking Tape, Ultra Floor Marking Tape & PE Warning Tape



ULTRA FLOOR MARKING TAPE



uFMT is 5x times stronger and 10x long-lasting. It is used for demarking areas in industrial and warehouse complexes. Designed to last long without damaging the floor, unlike paints. Can withstand heavy forklift traffic and industrial movements

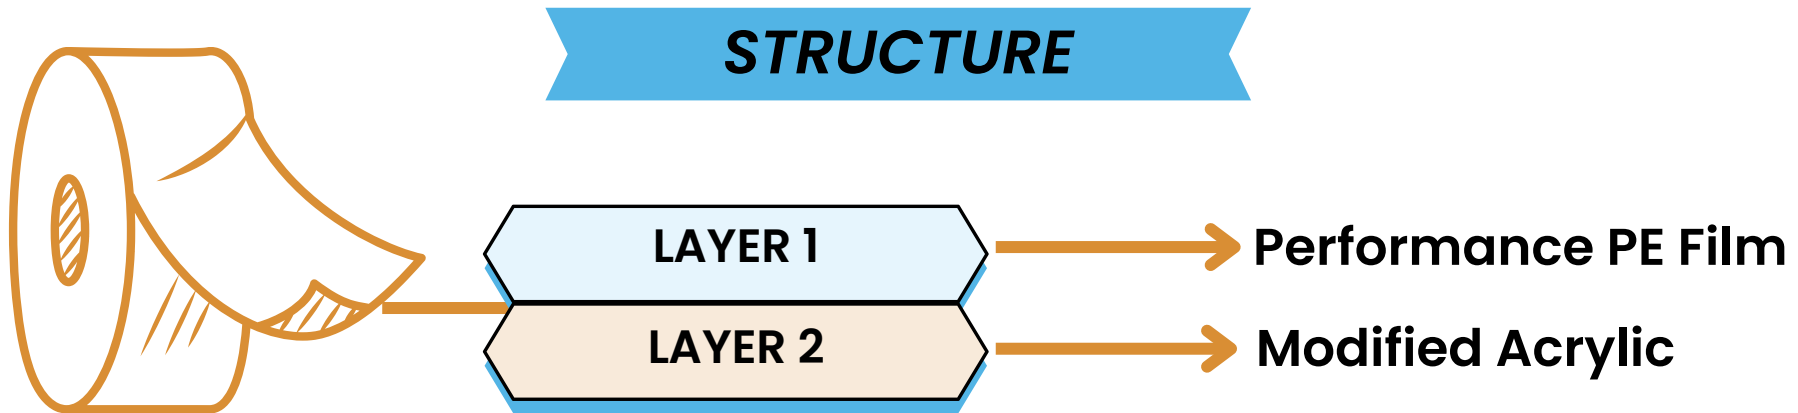

PERFORMANCE

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
uFMT150	Performance PE Film	150µ/6 mil	> 1400 gms	> 500 g/in	> 5.5 kg/in	500%	10 Years


Colours	Slit Material
Red, Yellow, Green, Blue, Blue, White, Red & White and Black & Yellow & Custom Colours	Width: 36mm to 144 mm Length: 18 to 33 meters

FEATURES

- 5x times stronger & 10x long-lasting
- Can withstand heavy industrial movement
- UV Resistant
- Flexibility: Ultimate versatility
- No lifting or curling
- PVC Free

APPLICATION

Demarking areas in industrial and warehouse complexes




PVC FLOOR MARKING TAPE



Floor Marking Tapes are used for demarking areas in industrial and warehouse complexes
Designed to last long without damaging the floor, unlike paints. Can withstand heavy industrial movement

STRUCTURE

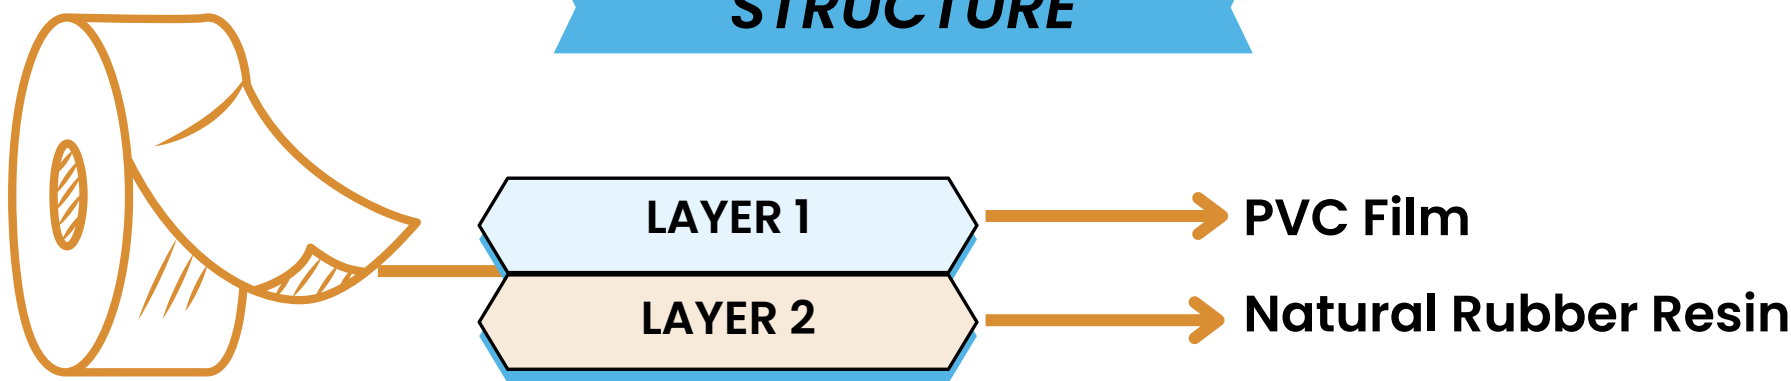

PERFORMANCE

Product Code	Backing	Total Thickness	Dart Impact	Peel	Tensile	Elongation	Shelf Life
PVCFMT50	PVC Film	150µ/6 mil	> 1100 gms	> 400 g/in	> 4.5 kg/in	100%	1 Year

Colours	Slit Material
Red, Yellow, Green, Blue, Blue, White, Red & White and Black & Yellow	Width: 36mm to 72 mm Length: 18 meters to 33 meters


FEATURES

- Can withstand heavy industrial movement
- Flexibility: Ultimate versatility
- No lifting or curling

APPLICATION



Demarking areas in industrial and warehouse complexes




ANTI SKID TAPE



Improve workplace safety with a simple, effective solution. **Anti-Skid Tape** adds strong traction to walkways, ramps, platforms, stairs and ladders, helping prevent slips, trips and falls in factories, warehouses, other high-traffic areas & even bathrooms

STRUCTURE

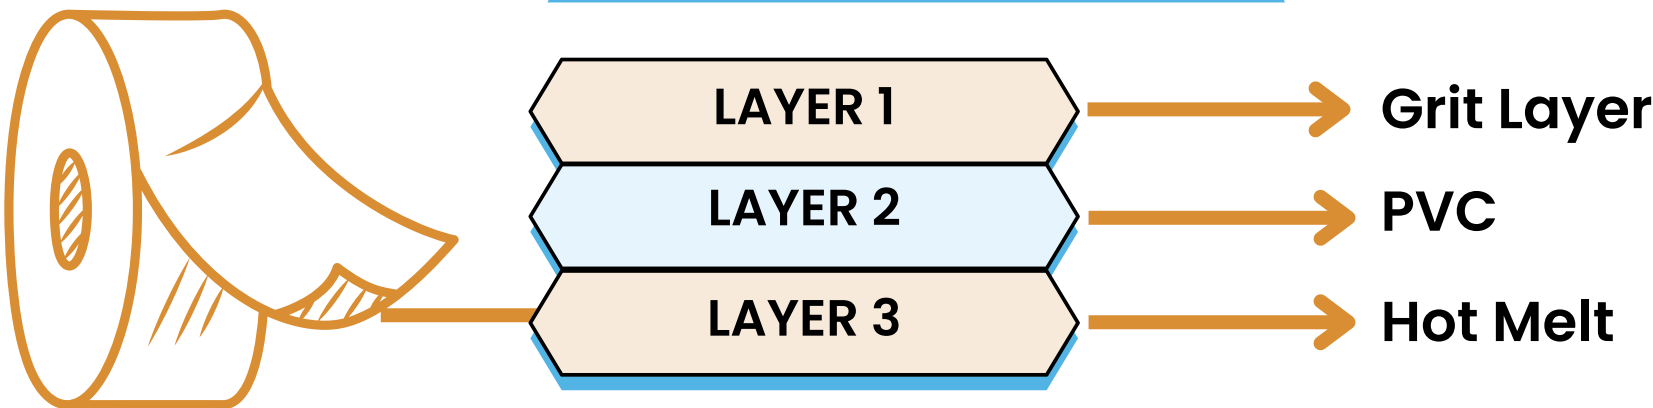

PERFORMANCE

Backing	Total Thickness	Peel	Service Temperature
Grit+ PVC Film	850µ/34 mil	> 1500 g/in	-20° to +120°C
Grit+ PVC Film	650µ/26 mil	> 1500 g/in	-20° to +120°C

Product Code	Colours	Slit Material
AST80G-BLA AST80G-YLW AST80G-Y/B AST80G-B/Ph ASTI60P-Tpt	Black Yellow Black & Yellow Black with Photoluminescent stripe Transparent	Width: 36mm to 72 mm Length: 5 meters to 20 meters

FEATURES

- Superior Slip Resistance
- Heavy-Duty Durability
- Weather & UV Resistant
- Easy Installation
- Suitable for indoor and outdoor use

APPLICATION



Factory floors, loading docks, ramps, walkways, machinery




Staircases, corridors, entrances, fire escapes, and escalators



Running boards on trucks, bus steps, train platforms, and marine deck areas




For bathtubs, showers, tubs, stairs and other slippery surfaces



WARNING TAPE



Warning tapes or Caution Tapes are used to warn or to catch the attention of passersby of an area possibly bearing danger or the situation containing any possible hazard to life

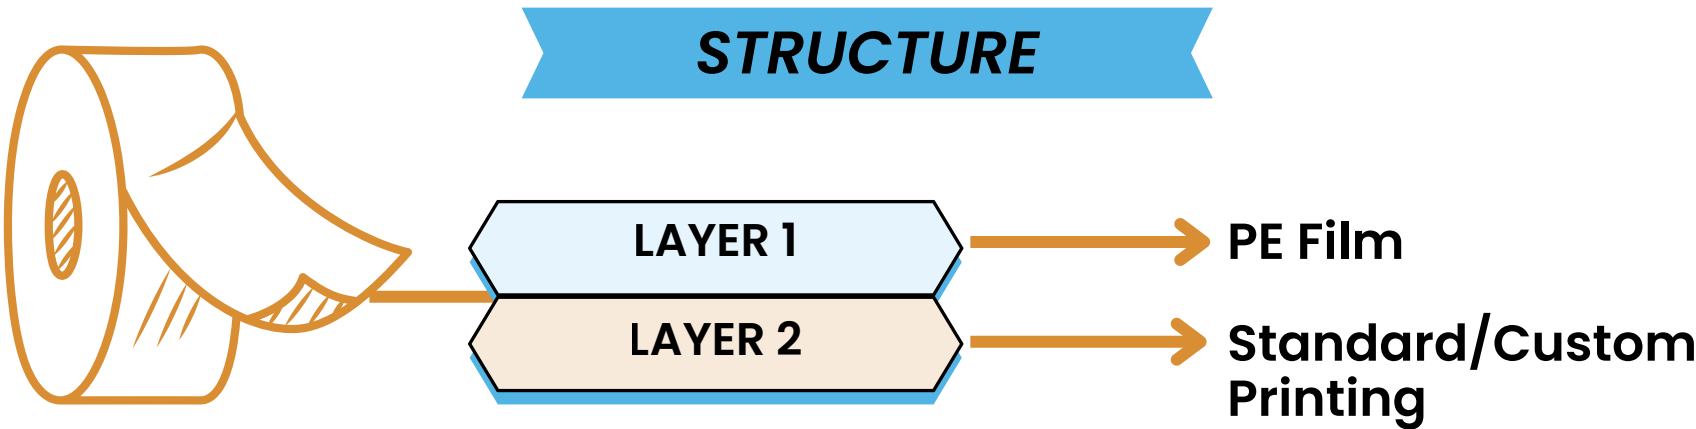

PERFORMANCE		
Product Code	Backing	Total Thickness
PEWT25	PE Film	25µ/1 mil
PEWT30	PE Film	30µ/1.2 mil
PEWT40	PE Film	40µ/1.6 mil
PEWT70	PE Film	70µ/2.8 mil

Colours	Slit Material
Red & White, Black & Yellow & Custom Colours	Width: 70 mm to 100 mm Length: 100 meters to 1000 meters

FEATURES

- Warns and alerts pedestrians of danger in both small and large areas
- Signifies restricted access to hazardous areas
- Difficult to tear, hence providing additional security

APPLICATION



Marking at Construction Sites



Maintenance & Repair Operations



Irrigation and Mining Areas



Solar & Wind Power Facilities


SPECIAL APPLICATION TAPES



Special Application Tape! *The Only Solution....*

Our range of specialty tapes has been specially designed to provide the best results and performance for niche applications


The tapes are made with the finest quality backing material and adhesive for superior bonding and longevity



inVOLT PE INSULATION TAPE



World's first PE-based electric insulation tapes, have high elasticity, extreme elongation & higher electrical resistance (than pvc). The tapes have a wide service temperature. Available in both FR and Non-FR grades.

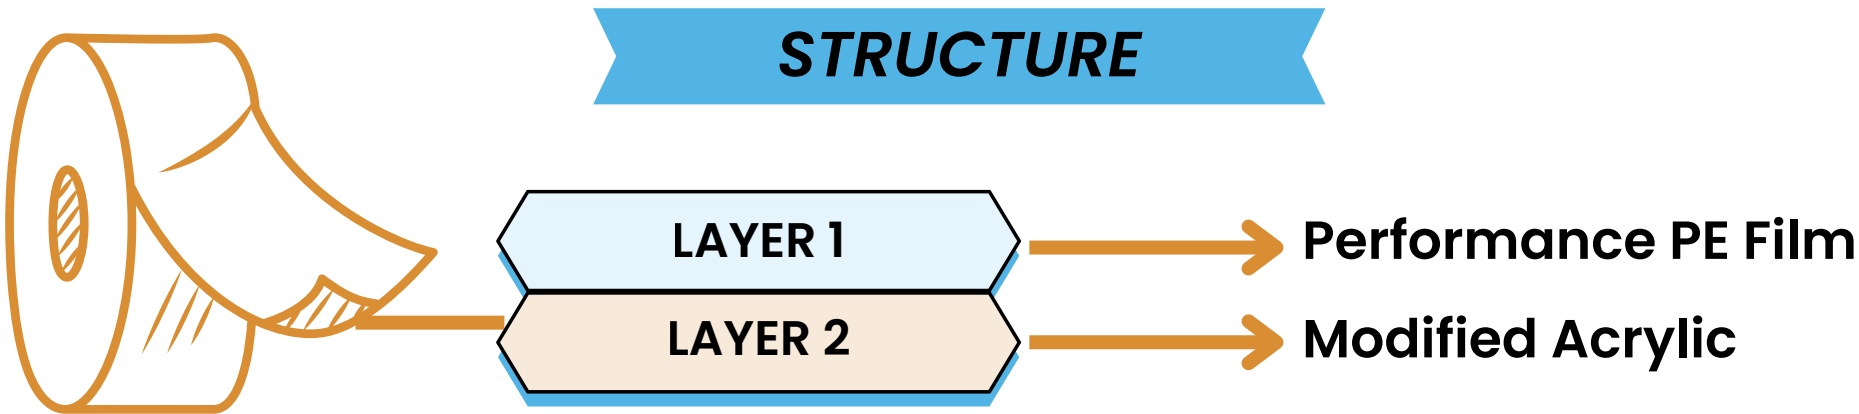

PERFORMANCE

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Temp. Stability (Long Term)
inVOLTPlus110	PE Film	110μ	> 8000	500%	5 Years	-30° C to 100° C
inVOLTPlus150	PE Film	150μ	> 8000	550%	5 Years	-30° C to 100° C
inVOLTPlus175	PE Film	175μ	> 8500	650%	5 Years	-30° C to 100° C

Colours	Slit Material	Log Roll
Black / Red / Green / Blue / Yellow / White & Orange	Width: 12 mm to 72 mm Length: 4 meters to 66 meters	Width: 1030 mm Length: 4 meters to 66 meters

FEATURES

- PVC Free
- High Conformability
- UV Resistant
- Strong Holding Power
- Excellent electrical and insulation properties


APPLICATION



For permanent joining/bonding for Wires and Cables



For protecting loose electrical wire ends




PE INSULATION TAPE – WIRE HARNESS

Our Performance PE based Insulation Tape is also perfect wrapping and insulating wire harness bundles. It conforms well to irregular wire bundles and branch points, giving good electrical insulation. PE film stays flexible upon ageing unlike PVC that tends to harden over time



STRUCTURE

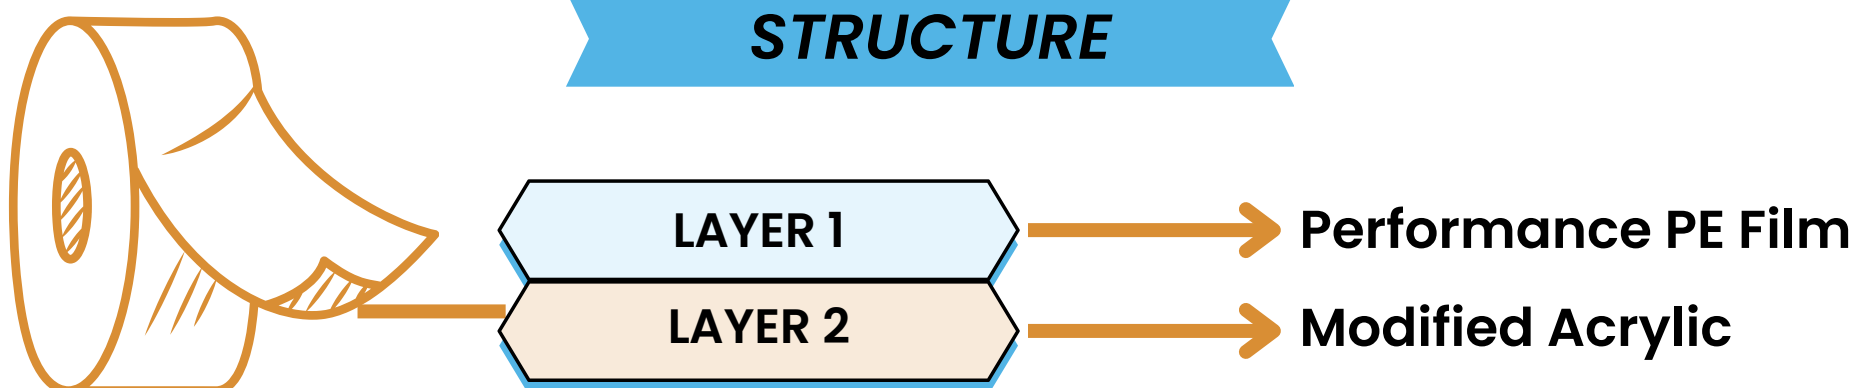

PERFORMANCE

Product Code	Backing	Total Thickness	Dielectric Strength (Volts)	Elongation	Shelf Life	Temp. Stability (Long Term)
inVOLTPlus110	PE Film	110µ	> 8000	500%	5 Years	-30° C to 100° C
inVOLTPlus150	PE Film	150µ	> 8000	550%	5 Years	-30° C to 100° C
inVOLTPlus175	PE Film	175µ	> 8500	650%	5 Years	-30° C to 100° C

Colours	Slit Material	Log Roll
Black / Red / Green / Blue / Yellow / White & Orange	Width: 12 mm to 72 mm Length: 4 meters to 66 meters	Width: 1030 mm Length: 4 meters to 66 meters

FEATURES

- PVC Free
- High Conformability
- UV Resistant
- Strong Holding Power
- Excellent electrical and insulation properties


APPLICATION



Wrapping and insulating wire harness bundles




For protecting loose electrical wire ends



MOPP TAPE



MOPP Tape is a tough, high-strength strapping tape. It provides superior tensile strength, tear resistance, & dependable holding power with clean, residue-free removal

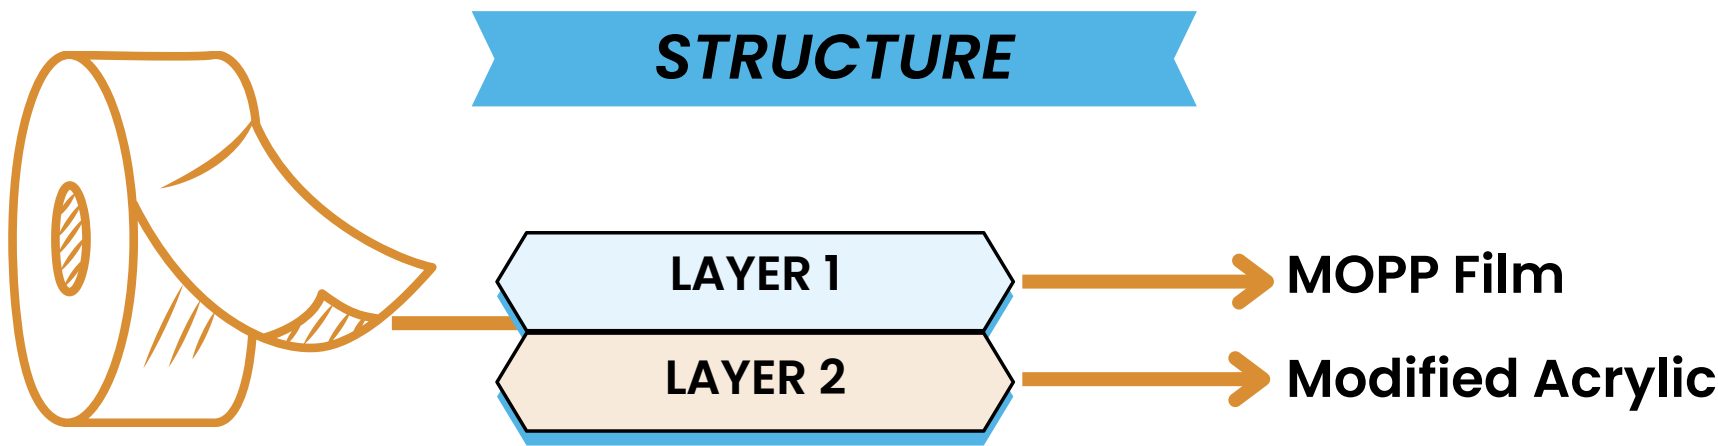

PERFORMANCE

Product Code	Backing	Film Thickness	Total Thickness	Tack	Holding Power	Peel	Tensile
MOPP80	MOPP Film	50μ	80μ/3.2 mil	< 8 cm	> 5000 mins	> 650 g/in	> 50 kg/in
MOPP110	MOPP Film	80μ	110μ/4.4 mil	< 8 cm	> 5000 mins	> 650 g/in	> 100 kg/in
MOPP140	MOPP Film	110μ	140μ/5.6 mil	< 8 cm	> 5000 mins	> 650 g/in	> 100 kg/in

Colours	Slit Material
Transparent, White & Custom Colours	Width: 12 mm to 100 mm Length: 25 meters to 1500 meters

FEATURES

- Excellent Tensile Strength
- Clear Adhesive with High Tack, Peel, and Shear
- Stain Free Removal
- Odourless


APPLICATION



Heavy Duty Holding



Bundling, Palletizing & Packaging




AIR VENTILATION TAPE



Air Ventilation Tapes are used during Foam Forming in Sandwich Panels of Metals, Composites, and Plastics
When applied on air-vents of a panel under which PU, PIR are being formed, it allows the hot air to pass through, providing a barrier to the foam liquid and solid

STRUCTURE

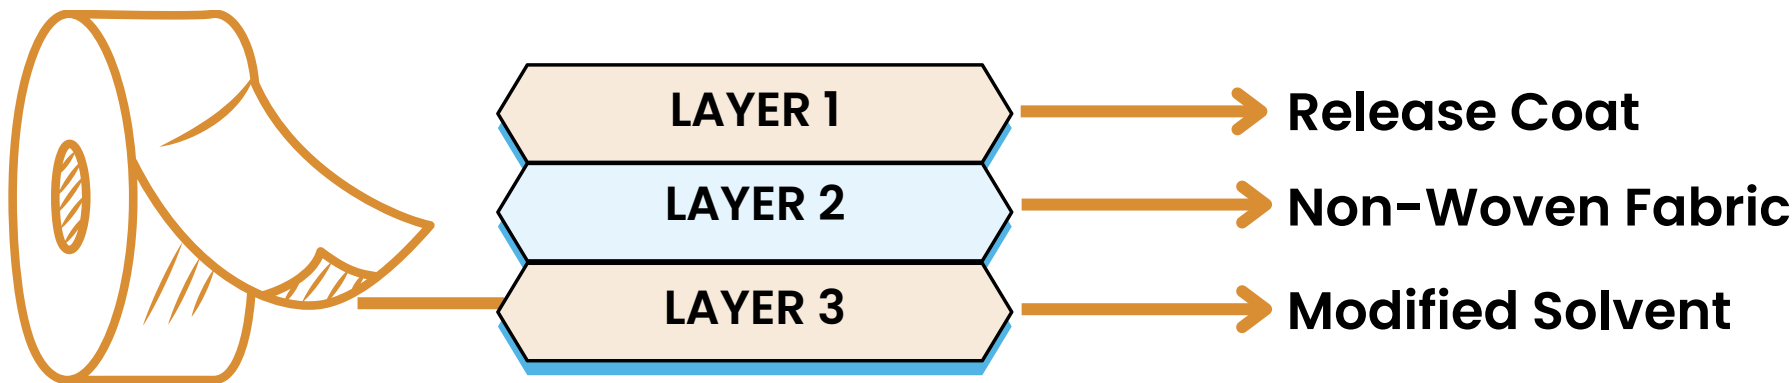

PERFORMANCE


Product Code	Backing	Total Thickness	Tack	Holding Power	Peel	Tensile
AVT160	Non-Woven Fabric	160μ	< 12 cm	> 1000 mins	> 400 g/in	> 4 kg/in


Colours	Slit Material
White	Width: 12 mm to 300 mm Length: 33 meters to 66 meters

FEATURES

- Special porous backing allowing excellent permeability of high air/gases
- Pressure sensitive adhesive holds strong to a wide variety of surfaces

APPLICATION

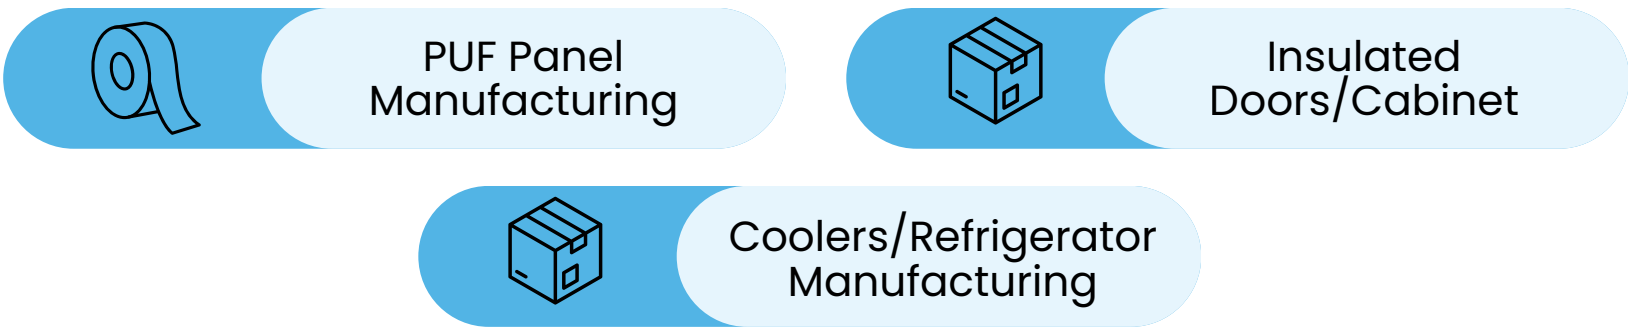




VOID SECURITY TAPE

Tamper evident tapes for secure packaging, leaves a "void-opened" or custom message when opened removed from the box. Specially designed void tapes with high adhesion for packing of medium to heavy-duty boxes



STRUCTURE

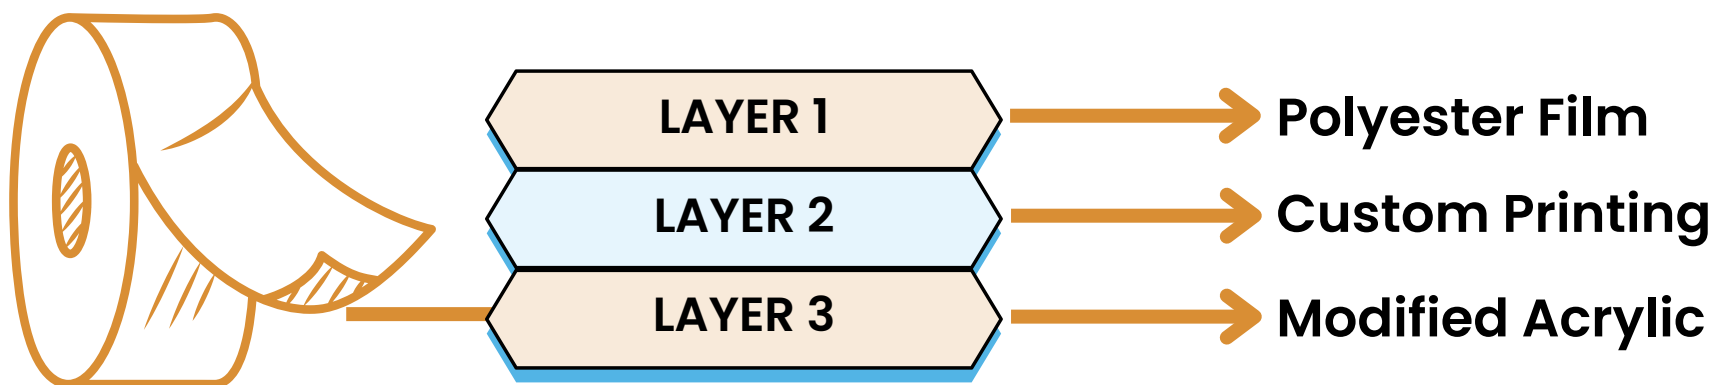

PERFORMANCE

Product Code	Backing	Total Thickness	Holding Power
VST	Polyester Film	50µ/2 mil	> 5000 mins

Printing & Colour	Slit Material
Custom print & colours available	Width: 48 mm & 72 mm Length: 50 meters to 100 meters


FEATURES

- Tamper Evident
- Strong Adhesive
- Easy to apply on surfaces
- Leaves a "void-opened" or custom message when removed from the box

APPLICATION



Packaging of parcels & boxes in sectors like military, banking, aviation security, pharma & electronic




NANO TAPE

Nano Tape is your go-to tape for everyday use. It's great for decorating, organising, or fixing objects, indoors and outdoors, with no drilling needed. It holds substantial loads & peels off without leaving residue. It is also UV resistant, temperature, and moisture resistant



STRUCTURE

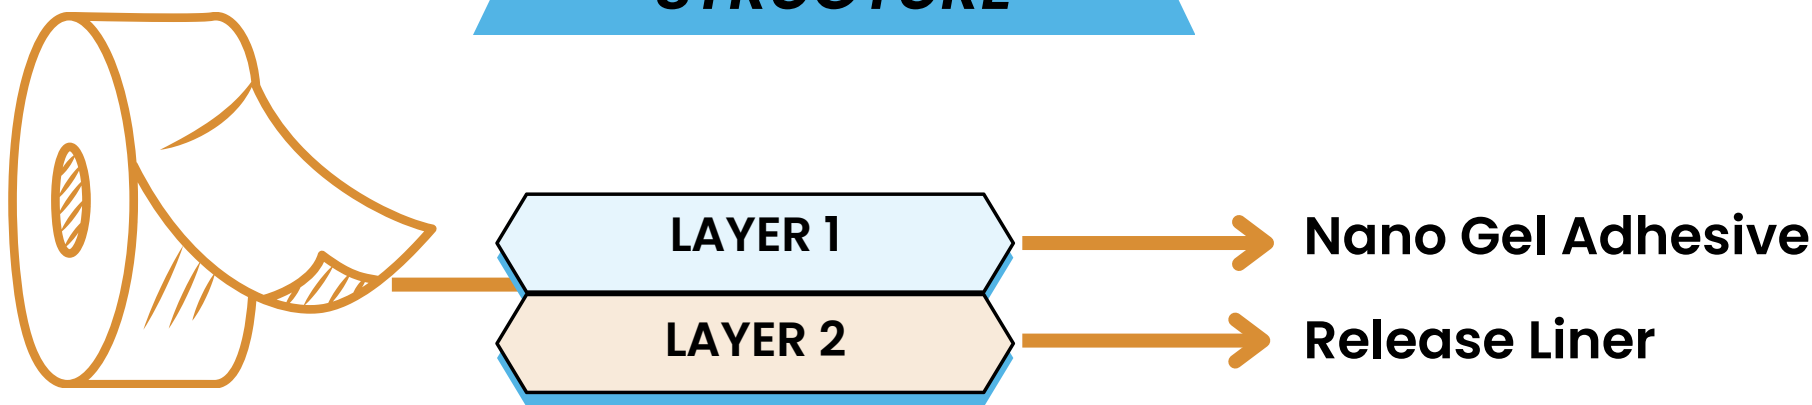

PERFORMANCE

Product Code	Backing	Total Thickness
NANO10	Nano Gel Adhesive	1 mm
NANO20	Nano Gel Adhesive	2 mm

Colour	Slit Material
Clear	Width: 18 mm to 48 mm Length: Upto 5 meters

FEATURES

- Strong Holding Power
- Great resistance to shock
- Peels of cleanly without leaving any residue
- UV resistant, temperature, and moisture resistant
- Discreet – almost invisible upon applying


APPLICATION



Ideal for mounting & decorating both indoors and outdoors



Organising objects at Home & Office




BUTYL TAPE

Butyl **Waterproofing** Tape is a self-adhesive sealing tape made with flexible butyl rubber & a strong aluminium foil backing. It bonds firmly to metal, glass, wood, concrete, plastic & blocks moisture & water. It works well on roof leaks, sheet joints, cracks, pipes, ducts and windows, and it resists UV, weather and ageing



STRUCTURE

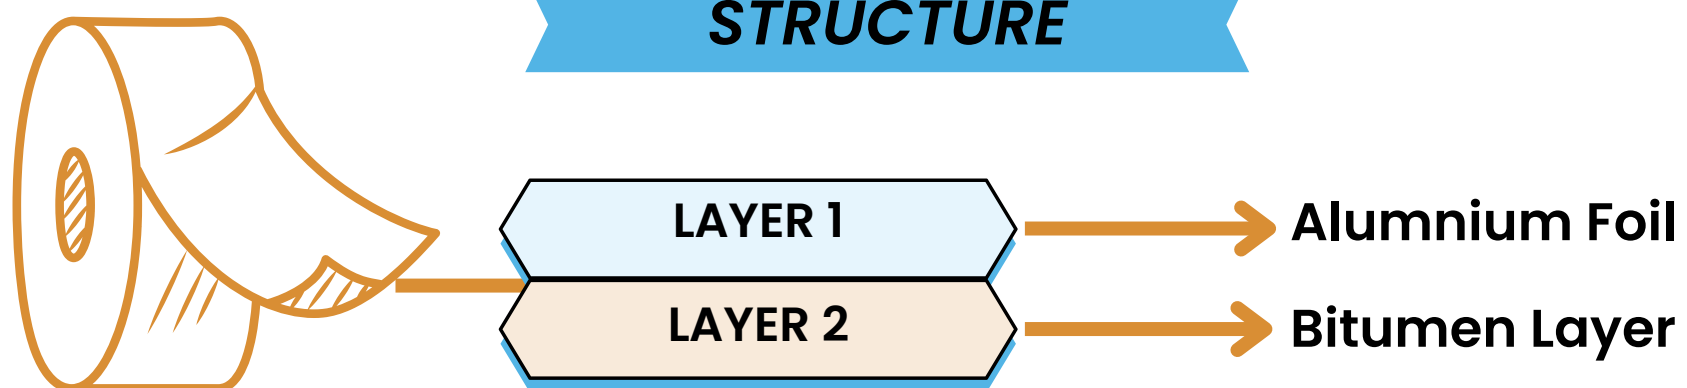

PERFORMANCE

Product Code	Backing	Total Thickness
ALBUT10	Alu Foil	1 mm

Colours	Slit Material	Log Rolls
White	Width: 48 mm to 100 mm Length: 10 meters	Width: 1000 mm Length: 10 meters


FEATURES

- Withstands UV rays and extreme temperatures
- Creates airtight and watertight seals
- Self Sealing
- Excellent Resistance to Acids, Mineral Salts & Corrosive Chemicals

APPLICATION



Sealing roof leaks, sheet joints, cracks, pipes, ducts and windows




PIPE WRAPPING TAPE

Pipe Wrapping Tapes are made with our performance PE film and modified acrylic adhesive.

The tapes are weatherproof, have good conformability, and are suitable for wrapping different kinds of pipes, both above ground and underground



STRUCTURE

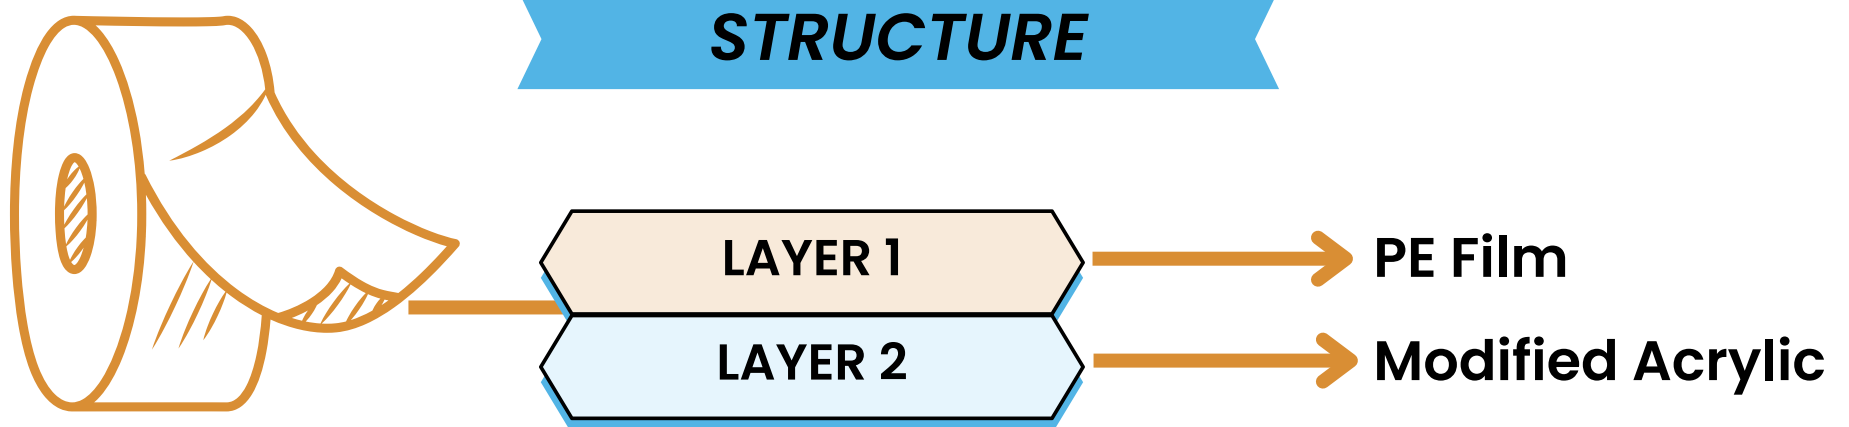

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Tensile	Elongation	Shelf Life
PWT	Performance PE Film	150μ	> 500 g/in	> 5.5 kg/in	> 500%	10 Years

Colours	Slit Material
Black, White & Multiple Colours	Width: 24 mm to 100 Length: 25 meters to 1000 meters

FEATURES

- Weatherproof and Corrosion resistance
- UV Resistant
- REACH/ RoHS compliant
- Superb Flexibility
- Strong Adhesion & Holding Power
- Excellent electrical and insulation properties


APPLICATION



To Protect Iron & Steel Pipe from Corrosion



To Protect electrical conduit & fittings from corrosion




PE FREEZER TAPE

PE Freezer tape is made for the refrigeration and HVAC industry, where it fixes coils to the freezer wall before PU foam injection. It keeps the coil in close contact with the wall, stops foam from seeping behind it, and stays reliable through the process



STRUCTURE

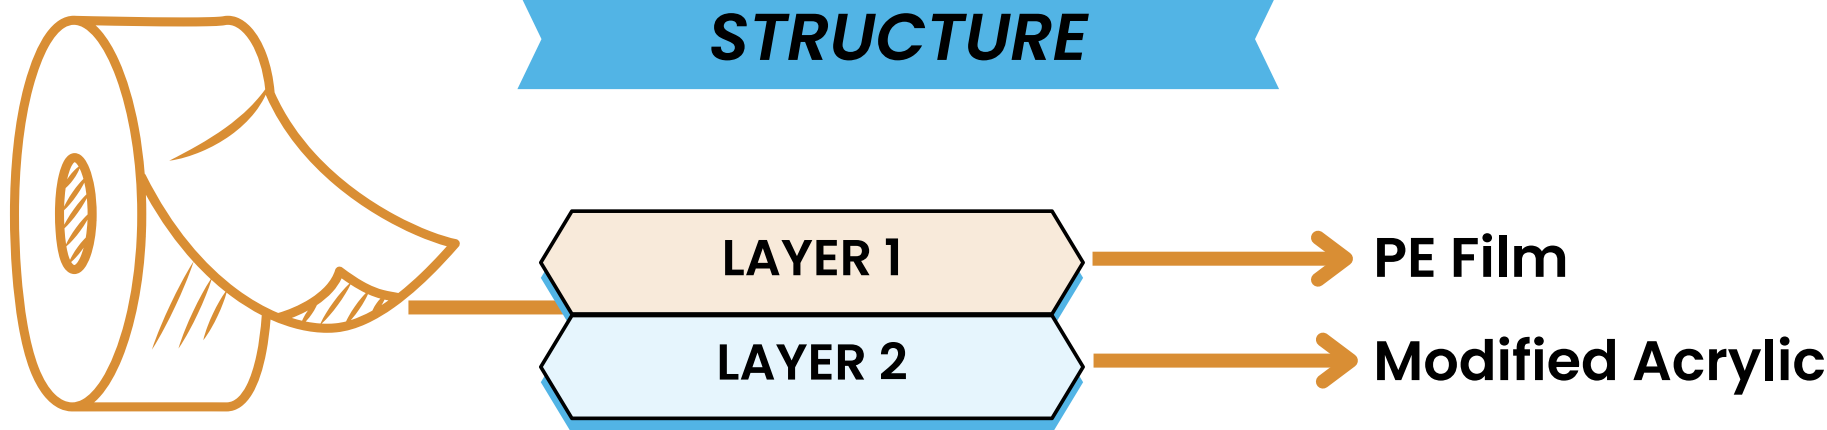

PERFORMANCE

Product Code	Backing	Total Thickness	Peel
PEFZ80	PE Film	80μ	> 500 g/in

Colours	Slit Material
White	Width: 48 mm to 100 Length: 50 meters to 500 meters

FEATURES

- UV Resistant
- Strong Holding Power
- Superb Flexibility
- High Tensile Strength


APPLICATION



Coil fixing before PU foam injection




Sealing edges (crimping areas) to prevent PU foam leakage



DRYWALL JOINTING TAPE



Drywall Joint Tape features a unique cross-fiberglass construction, offering superior strength compared to traditional mesh tapes. It resists shrinking, tearing, stretching, and distortion, while preventing joint cracking often seen with standard fiberglass mesh tape

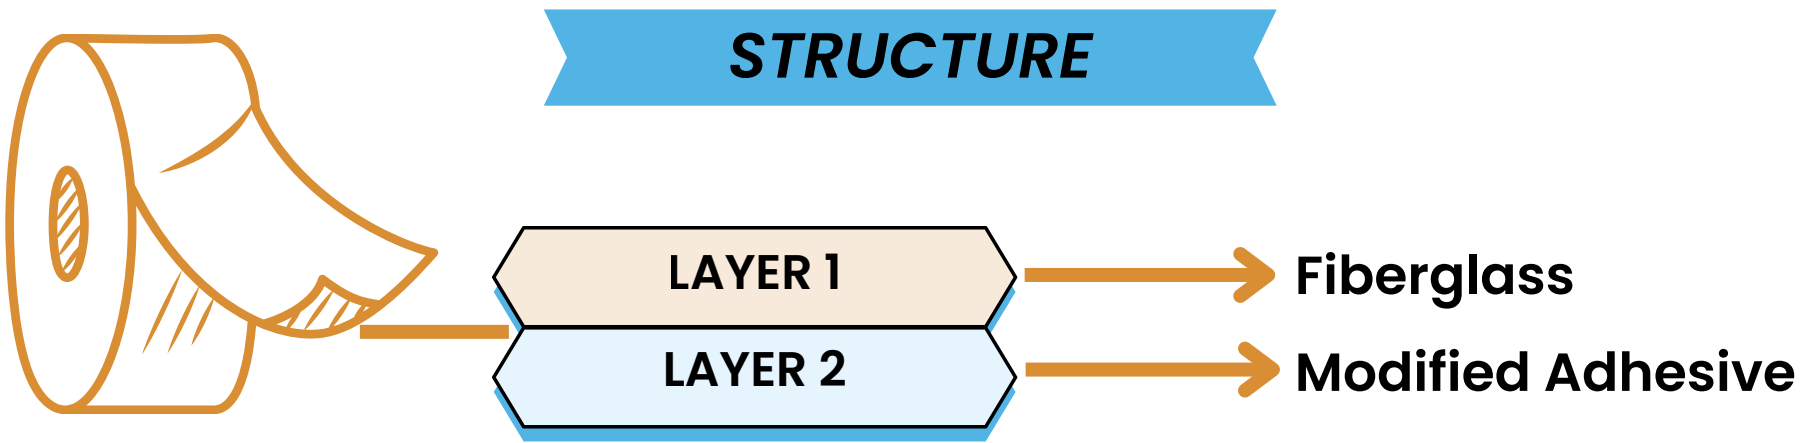


PERFORMANCE				
Product Code	Backing	Total Thickness	Peel	Tensile
DW60	Fiberglass	240μ	> 400 g/in	> 8 kg/in

Colours	Slit Material
White	Width: 48 mm to 96 mm Length: 25 meters to 100 meters

- FEATURES**
- Buffed on both sides for better bonding
 - Easy to apply
 - Resistant to disorientation
 - Centre crease for folding at corners

Suitable for false ceiling, partition joints etc.




ACETATE CLOTH TAPE

Acetate Tape is used for automotive wire harness wrapping and bundling. The acetate cloth backing is flexible and conforms well to uneven wire bundles, and it resists heat, moisture and common solvents. It withstands up to around 105°C and gives good electrical insulation



STRUCTURE

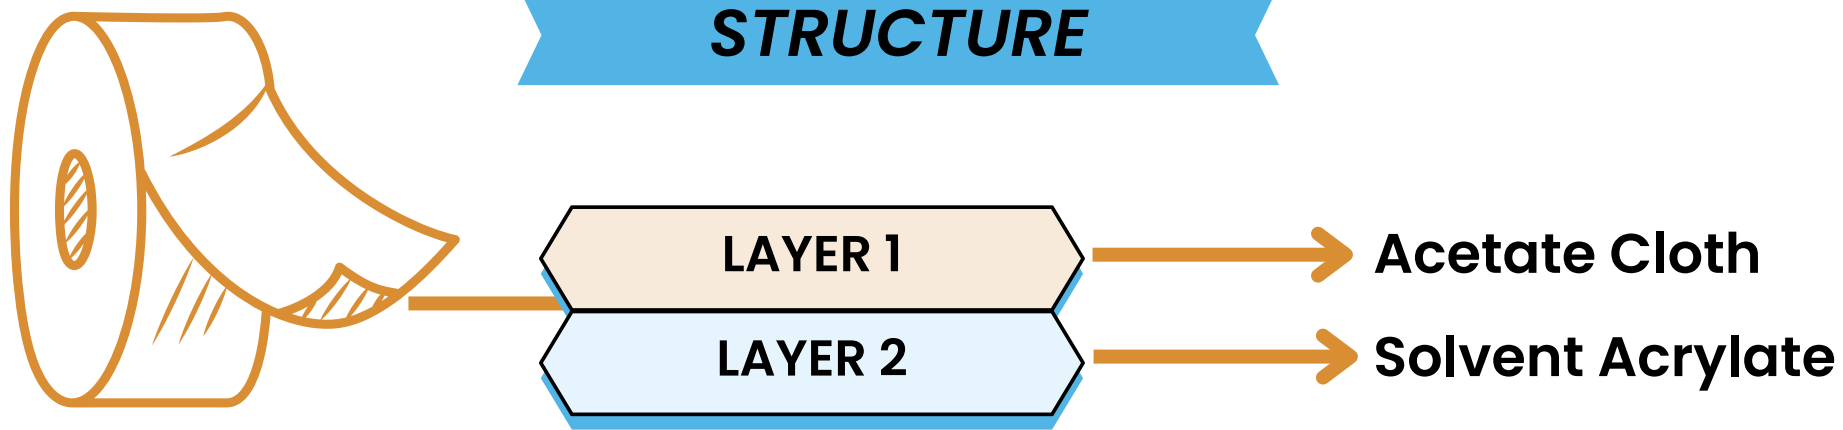

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Tensile	Service Temp
ACT160	Acetate Cloth	160μ	> 400 g/in	≥ 20 N/cm	-40°C ~ 105°C

Colours	Slit Material
Black	Width: 12 mm to 100 Length: 20 meters to 100 meters

FEATURES

- High temperature resistance, up to 105°C
- Flexible, conformable to uneven wire bundles
- Does not turn brittle over time
- Good electrical insulation properties
- Resists moisture and common solvents


APPLICATION



Wrapping of coils, transformers and motors



Automotive wire harness wrapping and bundling




PTFE FIBERGLASS TAPE

PTFE Fiberglass Tape is a woven cloth tape coated with a silicone adhesive, giving a non-stick, low-friction surface. It performs across a wide temperature range (-20°C to 260°C), resists chemicals & moisture, & stands up to tearing, puncture and abrasion. The cloth backing gives it higher tensile strength



STRUCTURE

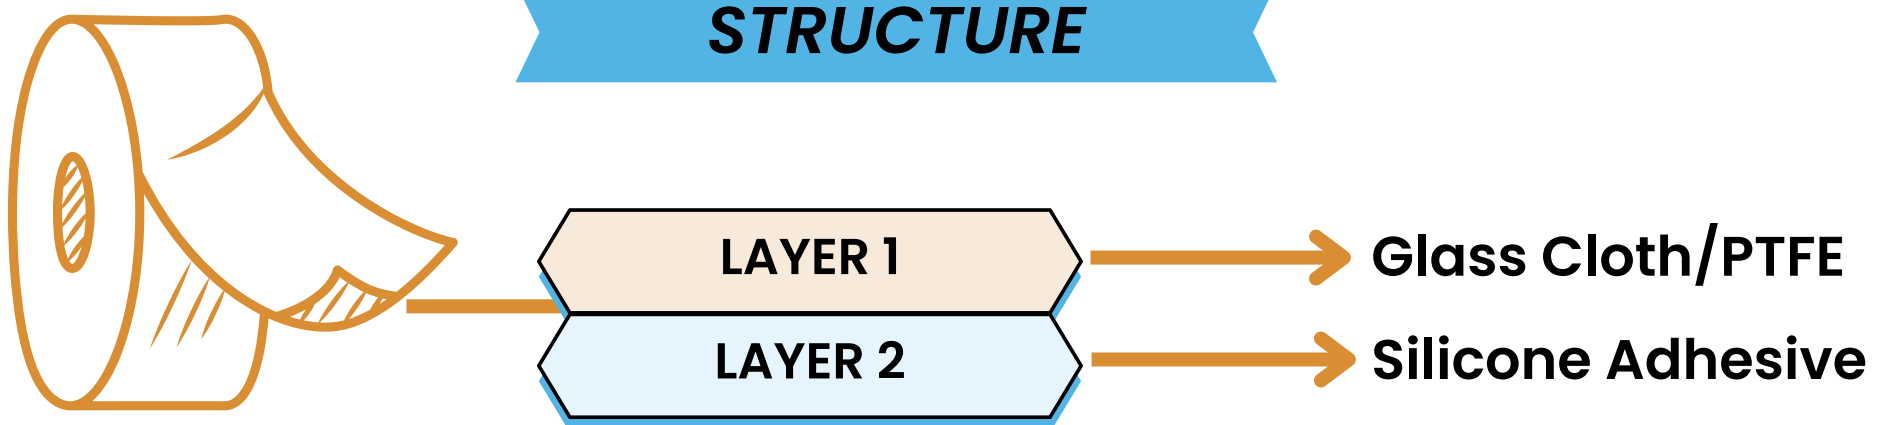

PERFORMANCE

Product Code	Backing	Total Thickness	Peel	Service Temp
PTFE250	Glass Cloth/PTFE	250 μ	> 800 g/in	-20°C ~ 260°C

Colours	Slit Material
Coffee	Width: 24 mm to 100 Length: 20 meters to 100 meters

FEATURES

- High temperature resistance, up to 260°C
- Resists chemicals and moisture
- High tensile strength, tear and puncture resistant
- Good abrasion resistance and long ageing life
- Flame Retardant

APPLICATION



Heavy-duty masking, bundling and harness wrapping




Aerospace, automotive, roofing and shipbuilding industries



Heat sealing machines and ironing/pressing equipment



PROTECTIVE PACKAGING



GreenWrap



GreenWrap is a fantastic replacement for plastic bubble wrapping films. It cushions & protects fragile items during transit

Available Sizes:

380 mm x 100 meters (Expandable up-to 70%)

500 mm x 250 meters (Expandable up-to 70%)

Thickness: 80 GSM

Colours: Brown & White

GreenFill



GreenFill is used for filling void spaces in shipping box. It prevents the items inside the box from moving or breaking


Available Size:

380 mm (Perforated Side) x 280 mm

Standard Length: 300 meters

Thickness: 80 GSM

Colours: Brown



Stretch Film



Made from LDPE, Stretch Film is used to protect and secure furniture, boxes & pallets

Thickness: 9µm – 70µm

Widths: 50 mm to 2000 mm

Colours: Clear & Custom Colours

Grades: Manual & Machine Grade




DISPENSERS

Mini Tape Desktop Dispenser



Features:

- Easy to Use
- Cost Effective

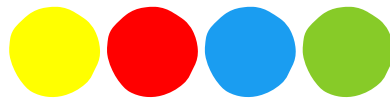

Colours: Yellow, Red, Blue, Green, White

Applications:

- For general sealing at home & offices



Handy Tape Dispenser

Features:


- Easy to Use
- Sturdy Design



Colours: Yellow, Red, Blue, Green, White

Applications:

- For box sealing at offices and industries

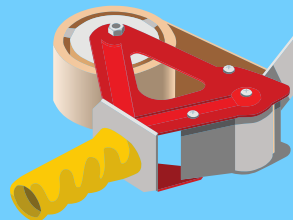

GreenWrap Dispenser




Features:

- Compatible with up to 500 mm rolls
- Suitable for all core ID's
- Adjustable tension mechanism for a smoother usage

Applications:

- For easy dispensing and stretching of honeycomb paper



GreenFill Dispenser

Features:

- Adjustable knob at the bottom to fix the dispenser on any tabletop
- Easy to assemble and carry
- A simple to pull and use dispenser

MAKE IT EASY

Applications:

- For easy & effortless dispensing of the greenfill paper





WATER ACTIVATED TAPE DISPENSERS

Manual Table-Top Dispenser



PROPERTIES:

- Compatible tape widths: 24 mm to 75 mm
- Suitable with both plain & reinforced tapes
- Compact Size & Easy Mobility
- Cost Effective

Dimensions (L x W x H) – 33 cm x 10 cm x 13 cm, Weight – 0.58 Kgs

Semi-Automatic Dispenser



PROPERTIES:

- Compatible tape widths: 40 mm to 75 mm
- Tape length:
- Suitable with both plain & reinforced tapes
- Hand lever for smooth & quick dispensing
- Increased efficiency & productivity

Dimensions (L x W x H) – 45 cm x 27 cm x 24 cm, Weight – 9.5 Kgs

Fully-Automatic Dispenser



PROPERTIES:

- Compatible tape widths: 40 mm to 75 mm
- Tape length: 38 cm to 270 cm
- Suitable with both plain & reinforced tapes
- Automatic buttons for quickest dispensing
- Provides best efficiency & productivity

Dimensions (L x W x H) – 50 cm x 33 cm x 30 cm, Weight – 13 Kgs

CONTACT US

Reach us at



www.mexim.in



marketing@mexim.in
sales@mexim.in



Domestic:
+91 9377705962
+91 9574745962



International:
+91 9904099007

Follow us on Social Media



[meximadhesivetapes](#)



[meximadhesivetapes](#)



[Mexim Adhesive Tapes](#)



[meximadhesive](#)

Locations

Head Office:

309/3, Gokul
Arcade-A,
Subhash Road,
Vile Parle East,
Mumbai 400057,
India


Unit 1:

Survey No 351/1,
D & E, Kachigam
Village, Daman -
396210, India

Unit 2:

Plot No.1,
Survey No. 215/1
Dadra- 396230,
India



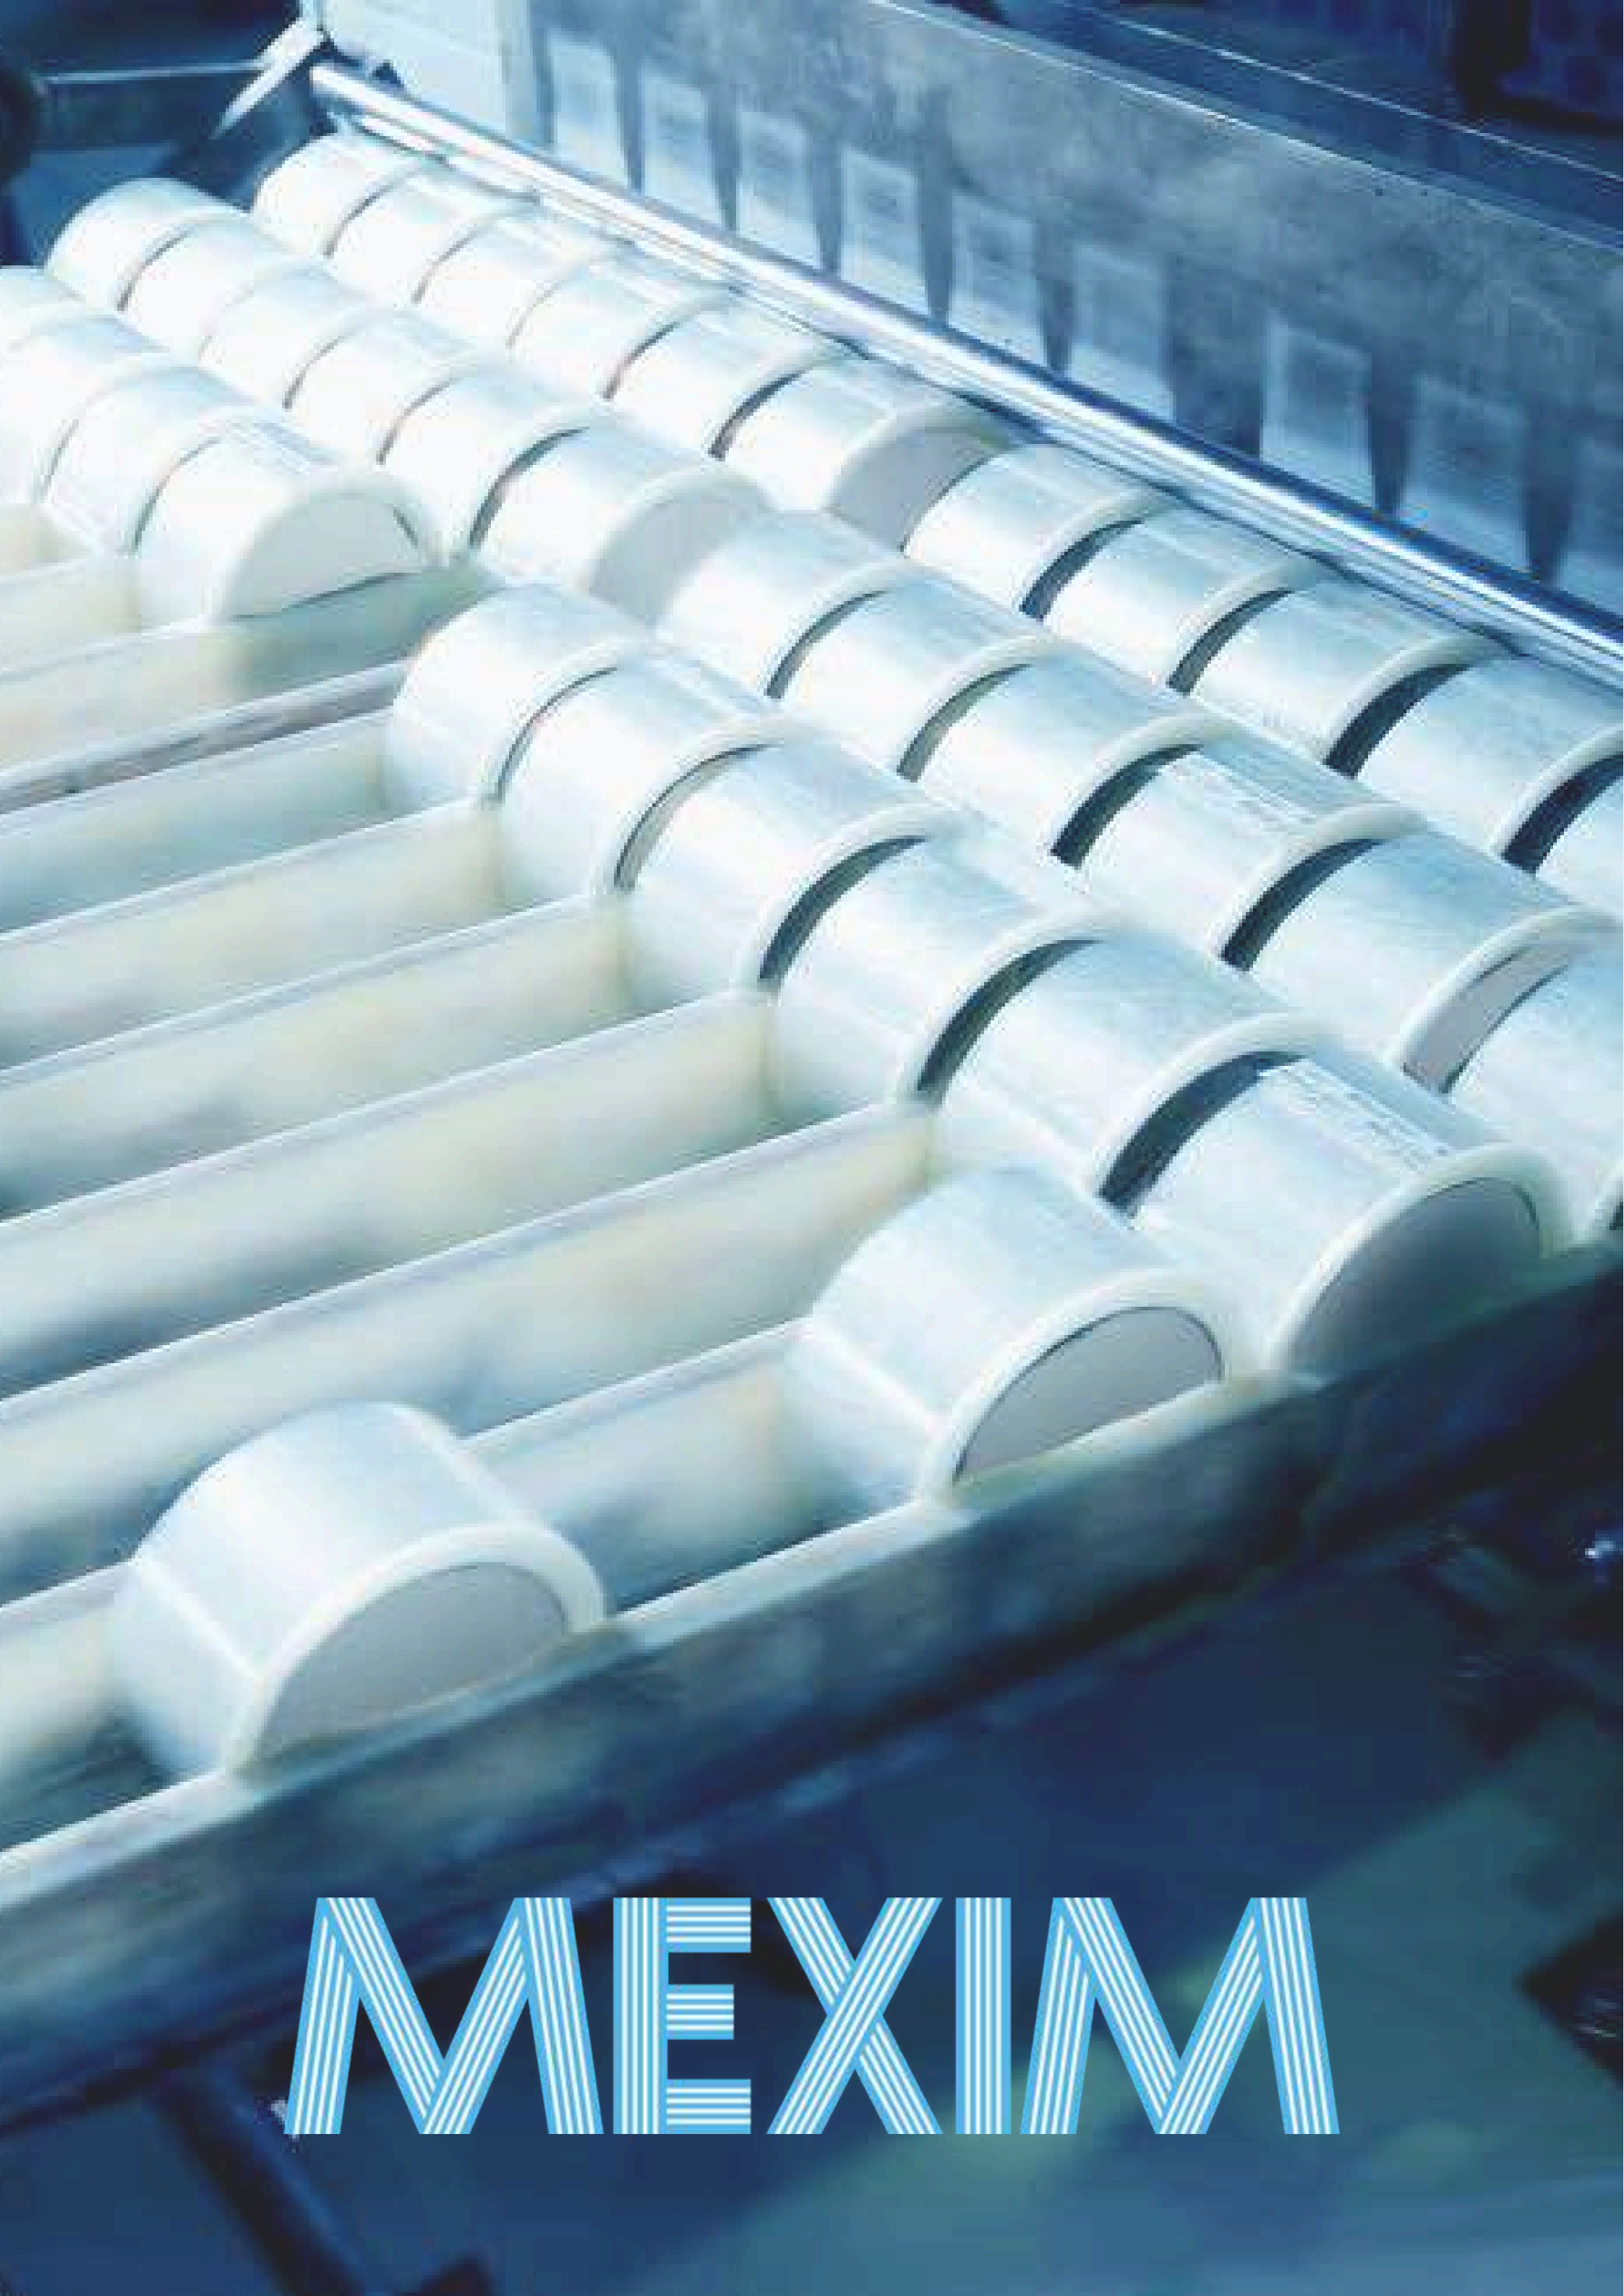

MEXIM